

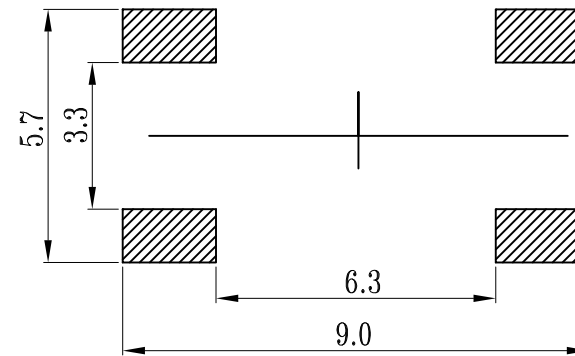



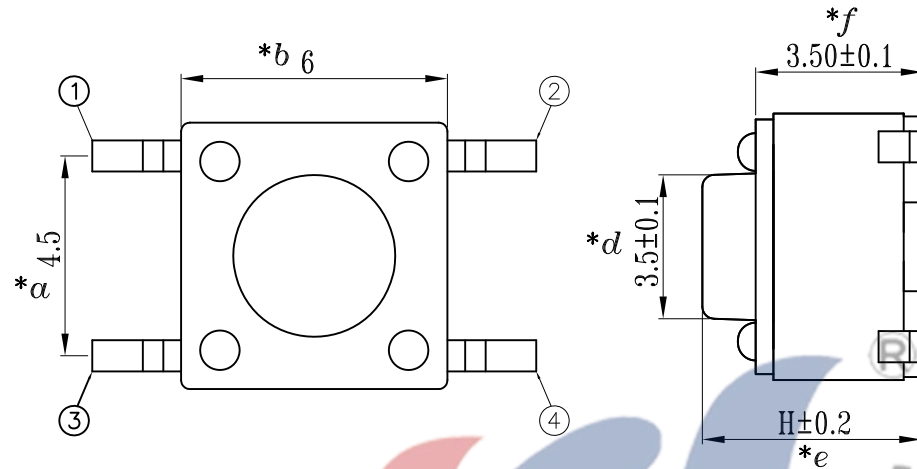


P.C.B LAYOUT

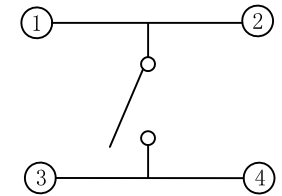

SCHEMATIC

H=8.5 mm

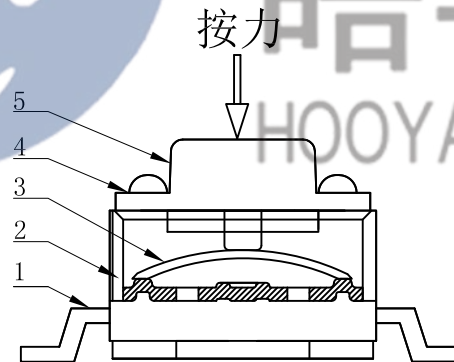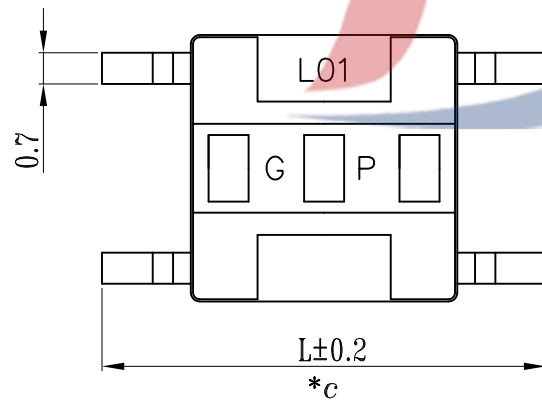

SPECIFICATION

- 1.Rating : DC12V 50mA.
 - 2.Contact resistance: $\leq 100m\Omega$.
 - 3.Insulation resistance: $\geq 100M\Omega$ (DC100V).
 - 4.Withstanding voltage: 250VAC .
 - 5.Operating Force: $200\pm 100gf$.
 - 6.Travel: $0.25\pm 0.1mm$.
 - 7.life test: 100,000 cycles.
 - 8.Operation temperature range: $-25^{\circ}C\sim 85^{\circ}C$.
 - 9.Sign"* "is importance dimension.
- TEL: 0769-82310510-867

脚距 L

8.0 mm

8.8 mm

9.8 mm

					TOLERANCE							
					UNLESS SPECIFIED							
					<1.5: $\pm 0.1mm$	ANGULAR						
					>1.5~5.0: $\pm 0.25mm$	$\pm 1^{\circ}$						
					>5.0: $\pm 0.3mm$		NO	DATE	REVISIONS		BY	APPD
5	KNOB	PA9T	1	BLACK/RED	TITLE: TACT SWITCH			UNIT : MM		ROHS	DWN	
4	COVER	BRASS/SUS	1	Sn-Plating	MODEL: TC-06104-085E			SCALE: 1:1		COMPLIANT	CHK'D	
3	CONTACT	SUS	1	Ag-Plated	 DONGGUANG HAOYU ELECTRONICS CO., LTD 东莞市弘皓电子有限公司					APPD		
2	CASE	PA9T	1	BLACK								
1	TERMINAL	BRASS	1	Ag-Plated								
NO.	PART	NAME	MATERIAL	QTY	FINISHING				PRO.AGL: 		REV :A0	