
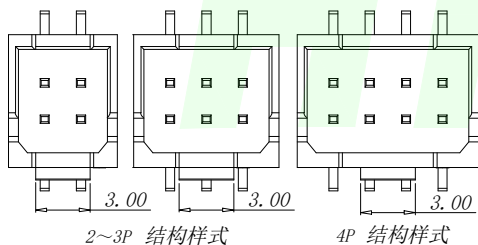
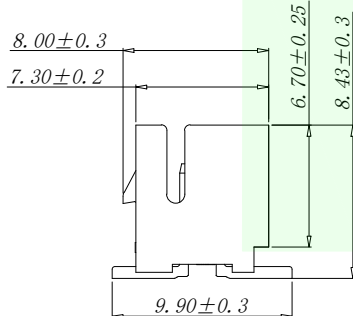





RoHS

| VER | MARK | PR. BY | DESCRIPTION | DATE |
|-----|------|--------|-------------|------|
|     |      |        |             |      |
|     |      |        |             |      |

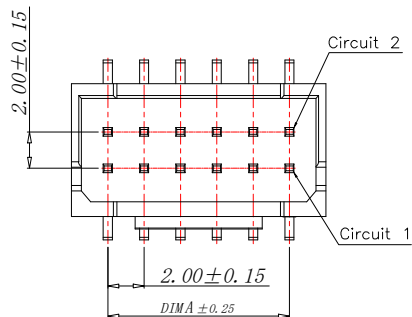

### 技术指标:


1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
2. 工作温度:  $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$ .
3. 适用线规: AWG#28~#22.
4. 额定电压: 250V DC/AC(rms).
5. 额定电流: 3.0A AC, DC.
6. 接触电阻:  $\leq 20\text{m}\Omega$ .
7. 耐压值: 800V AC/minute.
8. 绝缘电阻:  $\geq 1000\text{M}\Omega$ .



PIN number variable size comparison table

| PART NO           | PIN   | A     | B     | C     |
|-------------------|-------|-------|-------|-------|
| W200213K-4PW2421  | 2*2   | 2.00  | 6.00  | 3.00  |
| W200213K-6PW2421  | 2*3   | 4.00  | 8.00  | 3.00  |
| W200213K-8PW2421  | 2*4   | 6.00  | 10.00 | 3.00  |
| W200213K-10PW2421 | 2*5   | 8.00  | 12.00 | 5.00  |
| W200213K-12PW2421 | 2*6   | 10.00 | 14.00 | 7.00  |
| W200213K-14PW2421 | 2*7   | 12.00 | 16.00 | 9.00  |
| W200213K-16PW2421 | 2*8   | 14.00 | 18.00 | 11.00 |
| .....             | ..... | ..... | ..... | ..... |
| W200213K-44PW2421 | 2*22  | 42.00 | 46.00 | 39.00 |

适用线路板 (厚度: 1.6mm)



PCB.WELDING DRAWING (TOLERANCE:±0.05)

GENERAL TOLERANCES  
UNLESS SPECIFIED

|                 |       |       |       |
|-----------------|-------|-------|-------|
| X.X             | ±0.30 | X.°   | ±5°   |
| .XX             | ±0.20 | X.X°  | ±1°   |
| .XXX            | ±0.10 | X.XX° | ±0.5° |
| MANUFACTURE DWG |       |       |       |




深圳市华明通电子有限公司

Shenzhen Huamingtong Electronics Co., Ltd

PART NO.  
W200123K-XPW2421

TITLE:  
2.0 Pitch A型双排立贴

DESIGN: James  
CHED: Talen  
APPD: Sophia



| CUSTOMER | SIZE  | UNITS |
|----------|-------|-------|
|          | A4    | MM    |
|          | SCALE | SHEET |
|          | N:A   | 1/1   |

|    |                   |                |
|----|-------------------|----------------|
| 3  | 2.0A 型双排立式 WTB 吸盖 | LCP UL94V-0 本色 |
| 2  | 2.0A 型立式 (连绕) 端子  | 铜合金/表面镀锡       |
| 1  | 2.0A 型双排立式 WTB 胶芯 | LCP UL94V-0 本色 |
| 序号 | 名称                | 材质             |