




L6. 2-1Y

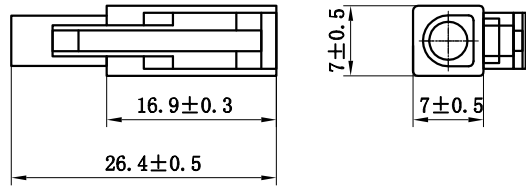


L6. 2-3Y

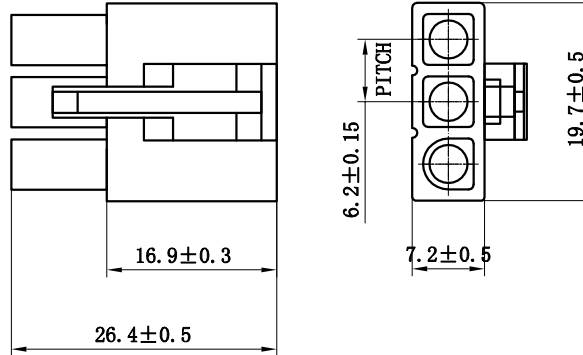


L6. 2-2Y

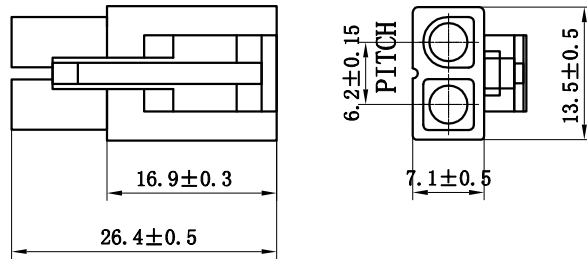

L6. 2-4YM

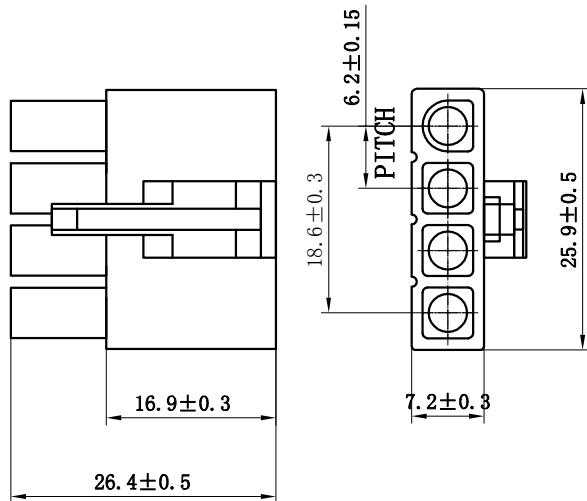

L6. 2-4Y

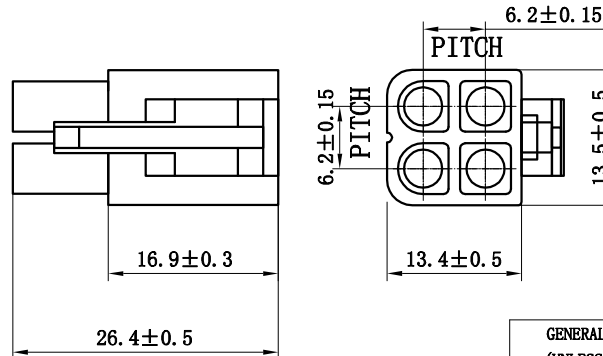

REV.	REVISION DESCRIPTION	DATE	APPD

NOTES:

1. Rated voltage: 300V AC/DC
2. Rated current: 9~15A AC/DC
3. Contact resistance: $\leq 20 \text{ m}\Omega$
4. Insulation resistance: $\geq 1000 \text{ M}\Omega$
5. Withstand voltage: 1500V AC/minute
6. Ambient temperature: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
7. Materials: Nylon UL94V-0(2)
8. Matched RoHS criteria


GENERAL TOLERANCES
(UNLESS SPECIFIED)

.X: ± 0.35	X°: $\pm 3.0^{\circ}$
.XX: ± 0.25	.X°: $\pm 2.0^{\circ}$
.XXX: ± 0.05	.XX°: $\pm 1.0^{\circ}$
FINISH:	
DRAWING NO:	


ZHE JIANG DELI CONNECTORS CO., LTD

PRODUCT NAME: DL62001 (L6. 2)-Y		TITLE: 6.2mm Pitch Wire To Wire Plug Housing	
DR: Ni Sheng Le	DATE: 21/08/01	PART NO:	
CHKD: Wu Hui	DATE: 21/08/01	SCALE: N/A	PAGE: 1/2
APPD: Ren An De	DATE: 21/08/01	UNITS: mm	REV.: A


L6. 2-6Y

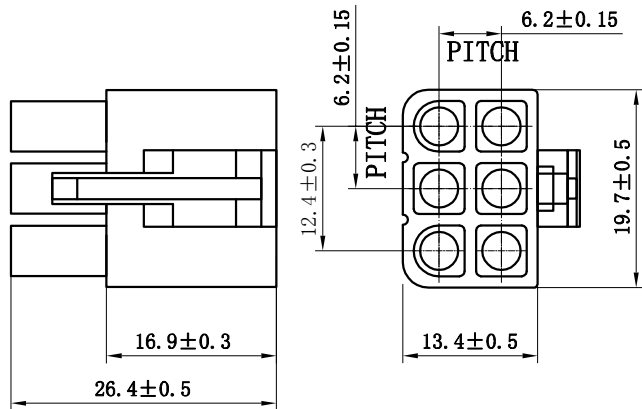


L6. 2-9Y

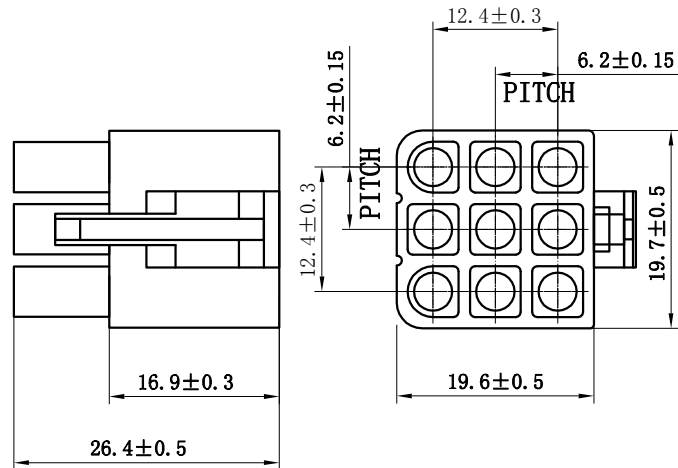

L6. 2-12Y

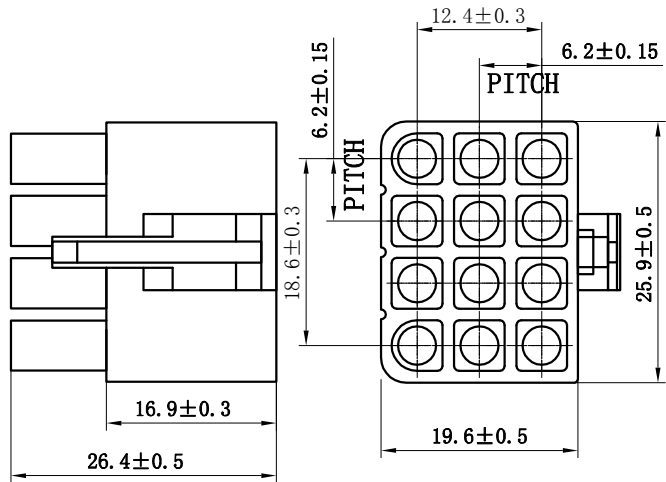

L6. 2-15Y

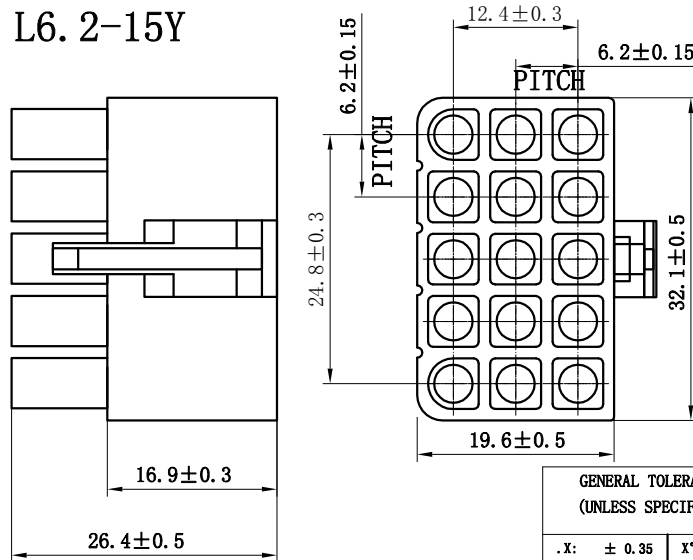

NOTES:

1. Rated voltage: 300V AC.DC
2. Rated current: 9~15A AC DC
3. Contact resistance: $\leq 20 \text{ m}\Omega$
4. Insulation resistance: $\geq 1000 \text{ M}\Omega$
5. Withstand voltage: 1500V AC/minute
6. Ambient temprature: $-40^\circ\text{C} \sim 105^\circ\text{C}$
7. Materials: Nylon UL94V-0(2)
8. Matched RoHS criteria


GENERAL TOLERANCES (UNLESS SPECIFIED)

.X: ± 0.35	X° : $\pm 3.0^\circ$
.XX: ± 0.25	.X° : $\pm 2.0^\circ$
.XXX: ± 0.01	.XX° : $\pm 1.0^\circ$
FINISH:	
DRAWING NO:	


ZHE JIANG DELI CONNECTORS CO., LTD

PRODUCT NAME: DL62001 (L6. 2)-Y		TITLE: 6.2mm Pitch Wire To Wire Plug Housing	
DR: Ni Sheng Le	DATE: 21/08/01	PART NO:	
CHKD: Wu Hui	DATE: 21/08/01	SCALE: N/A	PAGE: 2/2
APPD: Ren An De	DATE: 21/08/01	UNITS: mm	REV.: A


L6. 2-2R

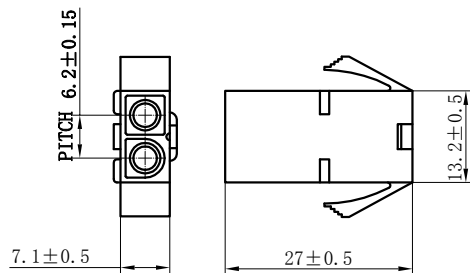


L6. 2-4R

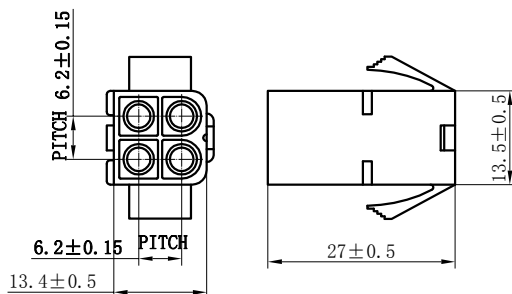


L6. 2-3R

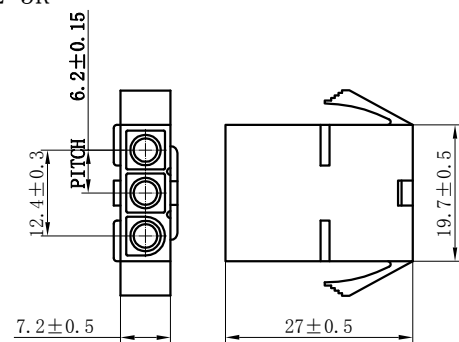

L6. 2-6R

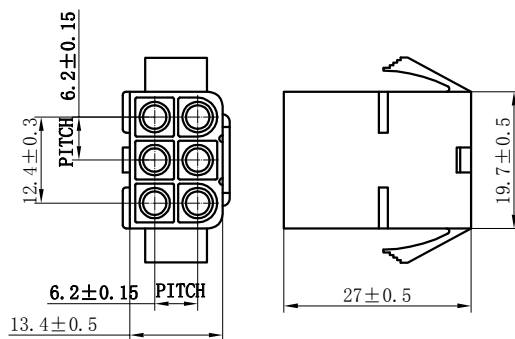

L6. 2-4RM

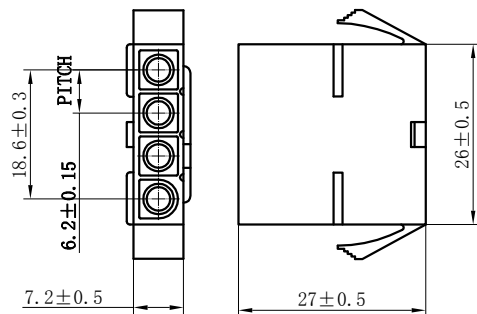

NOTES:

1. Rated voltage: 300V AC.DC
2. Rated current: 9~15A AC DC
3. Contact resistance: $\leq 20 \text{ m}\Omega$
4. Insulation resistance: $\geq 1000 \text{ M}\Omega$
5. Withstand voltage: 1500V AC/minute
6. Ambient temprature: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
7. Materials: Nylon UL94V-0(2)
8. Matched RoHS criteria


GENERAL TOLERANCES
(UNLESS SPECIFIED)

.X: ± 0.25	X° : $\pm 3.0^{\circ}$
.XX: ± 0.15	.X° : $\pm 2.0^{\circ}$
.XXX: ± 0.01	.XX° : $\pm 1.0^{\circ}$
FINISH:	
DRAWING NO:	


ZHE JIANG DELI CONNECTORS CO., LTD

PRODUCT NAME: DL62001 (L6. 2)-R		TITLE: 6.20 mm Pitch Housing	
DR: Chen Quan Long	DATE: 21/08/01	PART NO:	
CHKD: Wu Hui	DATE: 21/08/01	SCALE: N/A	PAGE: 1/2
APPD: Ren An De	DATE: 21/08/01	UNITS: mm	REV.: A


L6. 2-9R

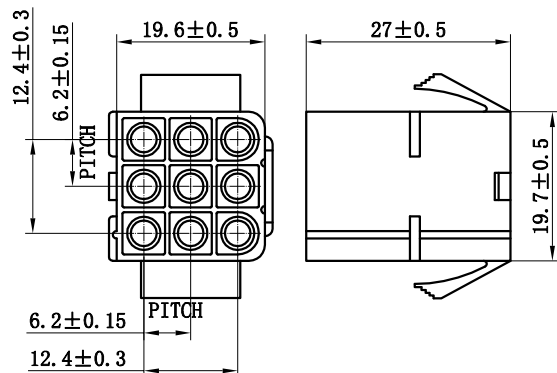

L6. 2-12R

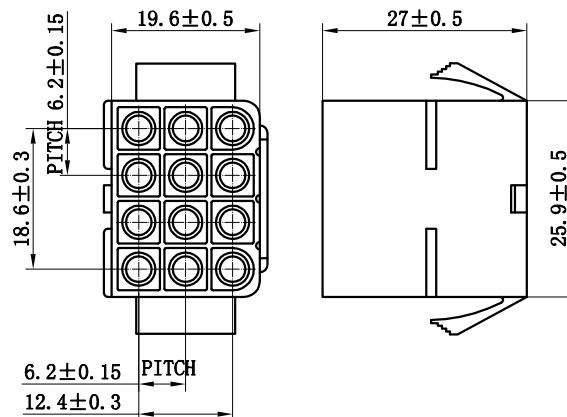


L6. 2-15R

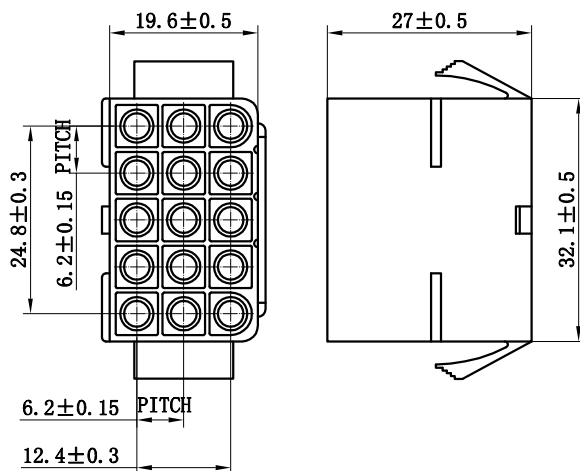


REV.	REVISION DESCRIPTION	DATE	APPD

NOTES:


1. Rated voltage: 300V AC.DC
2. Rated current: 9~15A AC DC
3. Contact resistance: $\leq 20 \text{ m}\Omega$
4. Insulation resistance: $\geq 1000 \text{ M}\Omega$
5. Withstand voltage: 1500V AC/minute
6. Ambient temprature: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
7. Materials: Nylon UL94V-0 (2)
8. Matched RoHS criteria

GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO ., LTD			
.X: ± 0.25	X° : ± 3.0°	PRODUCT NAME: DL62001 (L6.2)-R		TITLE: 6.20 mm Pitch Housing	
.XX: ± 0.15	.X° : ± 2.0°				
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Chen Quan Long	DATE:21/08/01	PART NO: DL62001-XXR-XXX-XX	
FINISH: _____		CHKD: Wu Hui	DATE:21/08/01		
DRAWING NO: GC-DL62001-XXR-XXX-XX		APPD:Ren An De	DATE:21/08/01	SCALE: N/A	PAGE: 2/2
				UNITS: mm	REV. : A


L6. 2-2RF

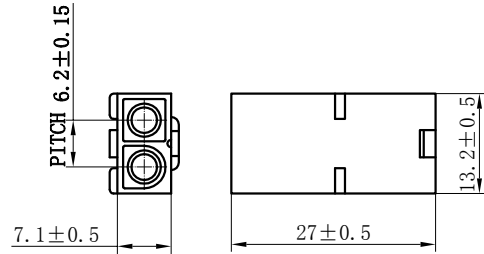


L6. 2-4RF

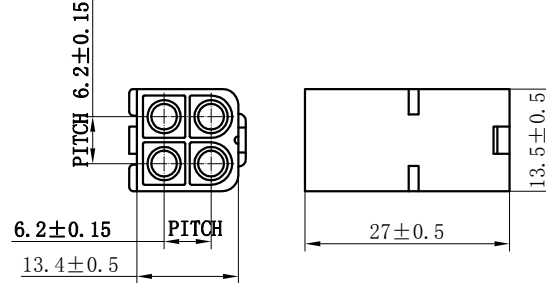


L6. 2-3RF

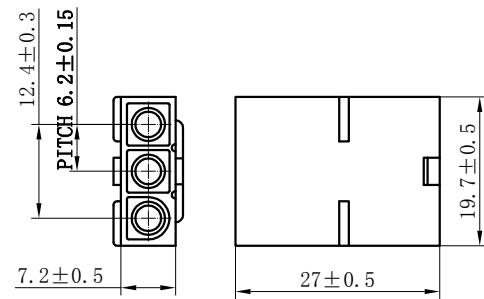

L6. 2-6RF

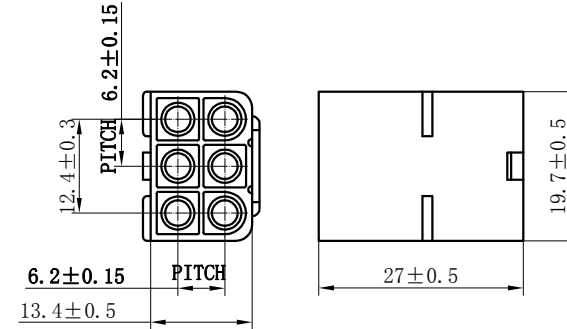

L6. 2-4RFM

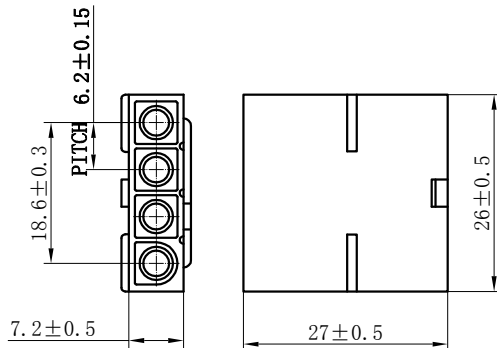

NOTES:

1. Rated voltage: 300V AC.DC
2. Rated current: 9~15A AC DC
3. Contact resistance: $\leq 20 \text{ m}\Omega$
4. Insulation resistance: $\geq 1000 \text{ M}\Omega$
5. Withstand voltage: 1500V AC/minute
6. Ambient temperature: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
7. Materials: Nylon UL94V-0(2)
8. Matched RoHS criteria


GENERAL TOLERANCES
(UNLESS SPECIFIED)

.X: ± 0.25	X° : $\pm 3.0^{\circ}$
.XX: ± 0.15	.X° : $\pm 2.0^{\circ}$
.XXX: ± 0.01	.XX° : $\pm 1.0^{\circ}$
FINISH:	
DRAWING NO:	


ZHE JIANG DELI CONNECTORS CO., LTD

PRODUCT NAME: DL62001 (L6.2)-RF		TITLE: 6.20 mm Pitch Housing	
DR: Chen Quan Long	DATE: 21/08/01	PART NO:	
CHKD: Wu Hui	DATE: 21/08/01	SCALE: N/A	PAGE: 1/2
APPD: Ren An De	DATE: 21/08/01	UNITS: mm	REV.: A


L6. 2-9RF

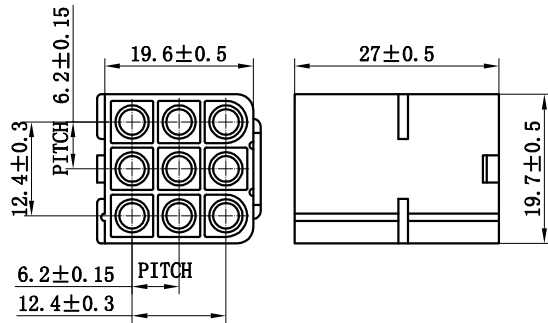

L6. 2-12RF

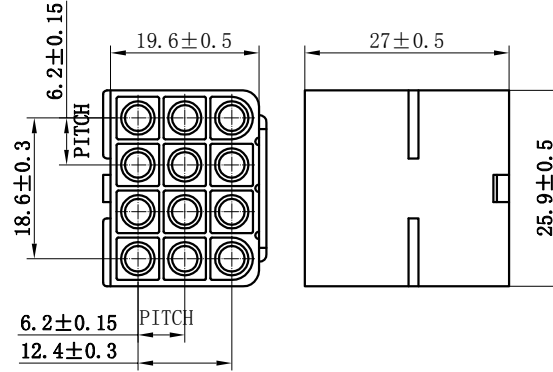

L6. 2-15RF

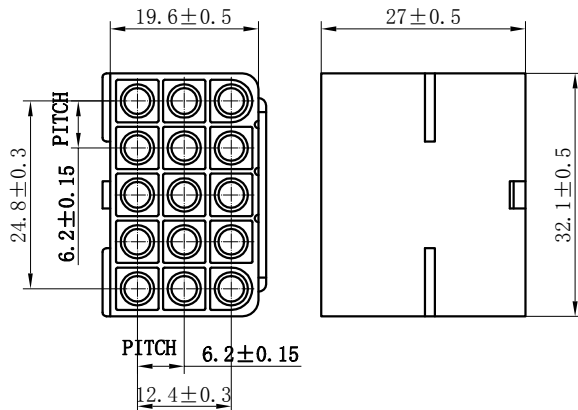

NOTES:

1. Rated voltage: 300V AC.DC
2. Rated current: 9~15A AC DC
3. Contact resistance: $\leq 20 \text{ m}\Omega$
4. Insulation resistance: $\geq 1000 \text{ M}\Omega$
5. Withstand voltage: 1500V AC/minute
6. Ambient temprature: $-40^\circ\text{C} \sim 105^\circ\text{C}$
7. Materials: Nylon UL94V-0(2)
8. Matched RoHS criteria

GENERAL TOLERANCES
(UNLESS SPECIFIED)

.X: ± 0.25	X° : $\pm 3.0^\circ$
.XX: ± 0.15	.X° : $\pm 2.0^\circ$
.XXX: ± 0.01	.XX° : $\pm 1.0^\circ$
FINISH:	
DRAWING NO:	

ZHE JIANG DELI CONNECTORS CO., LTD

PRODUCT NAME: DL62001 (L6. 2)-RF		TITLE: 6.20 mm Pitch Housing	
DR:Chen Quan Long	DATE:21/08/01	PART NO:	
CHKD: Wu Hui	DATE:21/08/01	SCALE: N/A	PAGE: 2/2
APPD:Ren An De	DATE:21/08/01	UNITS: mm	REV.: A

REV.	REVISION DESCRIPTION	DATE	APPD

NOTES

Used in DL62001-Y Series Housing.

Accepts AWG #22~16 Wire Range.




Insulation O.D.=1.7~3.4 mm.

Material : Phosphor Bronze .


Finish: Tin plated.

Qty/Reel: 3,000 PCS.


Thickness: 0.25 mm.

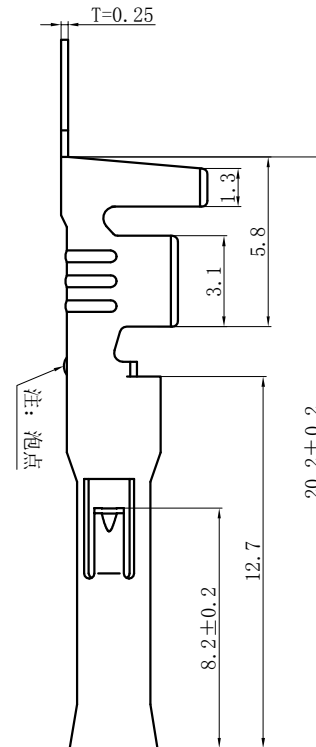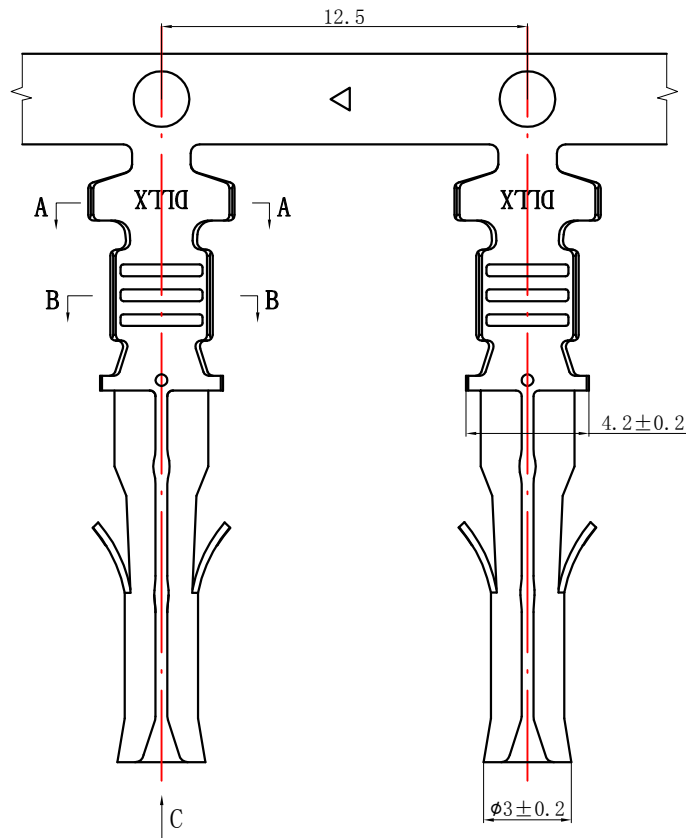

SECTION A-A



SECTION B-B





SECTION C

GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO., LTD	
.X: ± 0.25	X° : ± 3.0°	PRODUCT NAME: DL62001 (L6.2)-T	TITLE: 6.20 mm Pitch Crimp Terminal
.XX: ± 0.15	.X° : ± 2.0°	DR: Chen Quan Long	DATE: 21/08/01
.XXX: ± 0.01	.XX° : ± 1.0°	CHKD: Wu Hui	DATE: 21/08/01
FINISH:		APPD: Ren An De	DATE: 21/08/01
DRAWING NO:		SCALE: N/A	PAGE: 1/1
		UNITS: mm	REV.: A


REV.	REVISION DESCRIPTION	DATE	APPD

NOTES


Used in DL62001-R Series Housing.
Accepts AWG #22~16 Wire Range.
Insulation O.D.=1.7~3.4 mm.
Material : Phosphor Bronze .
Finish: Tin plated.
Thickness: 0.25 mm.

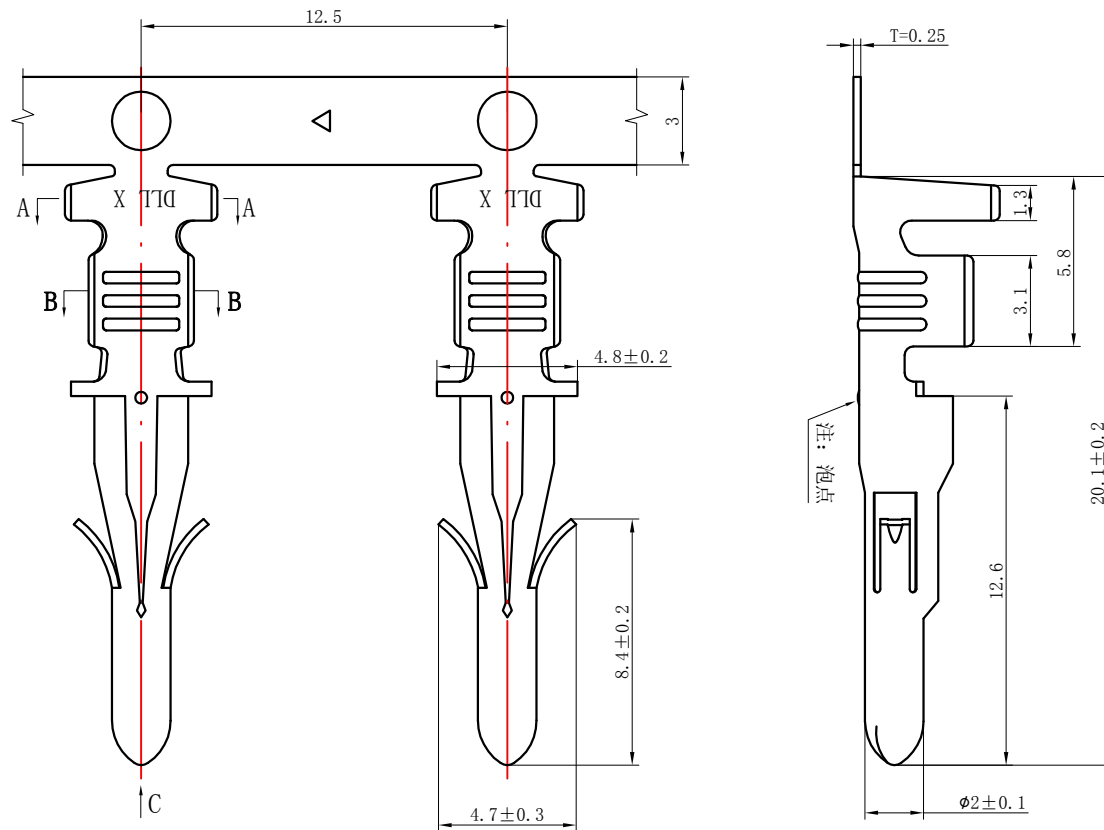

SECTION A-A



SECTION B-B



SECTION C

GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO., LTD			
.X: ± 0.25	X°: ± 3.0°	PRODUCT NAME: DL62001 (L6.2)-RT	TITLE: 6.20 mm Pitch Crimp Terminal		
.XX: ± 0.15	.X°: ± 2.0°				
.XXX: ± 0.01	.XX°: ± 1.0°	DR: Chen Quan Long	DATE: 21/08/01	PART NO:	
FINISH:		CHKD: Wu Hui	DATE: 21/08/01	SCALE: N/A	PAGE: 1/1
DRAWING NO:		APPD: Ren An De	DATE: 21/08/01	UNITS: mm	REV.: A