


4 PIN SOP RANDOM-PHASE TRIAC PHOTOCOUPLER ELM302X, ELM305X Series



Schematic



Features:

- Halogens free.
(Br < 900 ppm, Cl < 900 ppm, Br+Cl < 1500 ppm)
- Peak breakdown voltage
 - 400V: ELM302X
 - 600V: ELM305X
- High isolation voltage between input and output (Viso=3750 V rms)
- Compact dual-in-line package
- Compliance with EU REACH.
- Pb free and RoHS compliant.
- UL and cUL approved
- VDE approved
- SEMKO approved
- NEMKO approved
- DEMKO approved
- FIMKO approved
- CQC approved

Pin Configuration

1. Anode
2. Cathode
3. Terminal
4. Terminal

Description

The ELM302X series and ELM305X series are optically isolated triac driver devices. These devices contain a GaAs infrared emitting diode and a light activated silicon bilateral switch, which functions like a triac.

They are designed for interfacing between electronic controls and power triacs to control resistive and inductive loads for 115 to 240 VAC operations.

Applications

- Solenoid/valve controls
- Lamp ballasts
- Static AC power switch
- Interfacing microprocessors to 115 to 240Vac peripherals
- Incandescent lamp dimmers
- Temperature controls
- Motor controls

Absolute Maximum Ratings (Ta=25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I _F	30	mA
	Reverse voltage	V _R	6	V
	Power Dissipation	P _D	50	mW
Output	Off-state Output Terminal Voltage	ELM302X ELM305X	400 600	V
	R.M.S. On-state current	I _{T(RMS)}	70	mA
	Peak Repetitive Surge Current (pw≤100μs, 120pps)	I _{TP}	2	A
	Peak Non-repetitive Surge Current (f=60Hz, one cycle)	I _{TSM}	1	A
	Power dissipation	P _C	300	mW
	Total power dissipation	P _{TOT}	250	mW
	Isolation voltage *1	V _{ISO}	3750	Vrms
	Operating temperature	T _{OPR}	-40~+100	°C
	Storage temperature	T _{STG}	-55~+125	°C
	Soldering Temperature*2	T _{SOL}	260	°C

Notes:

*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1, 2 are shorted together, and pins 3, 4 are shorted together.

*2 For 10 seconds

Recommended Operating Conditions (Note)

Please use under recommended operating conditions to obtain expected characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit
Forward current	ELM30X2	15	20	25	mA
	ELM30X3	7	10	20	mA
	ELM30X4	5	7	15	mA
AC mains voltage	V _{AC}	-	-	240	V
Operating temperature	T _{OPR}	-25	-	85	°C

Notes:

The recommended operating conditions are given as a design guide necessary to obtain the intended performance of the device. Each parameter is an independent value. When creating a system design using this device, the electrical characteristics specified in this data sheet should also be considered.

Electro-Optical Characteristics (Ta=25°C unless specified otherwise)

Input

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Forward Voltage	V_F	-	1.2	1.5	V	$I_F = 10\text{mA}$
Reverse Leakage current	I_R	-	-	10	μA	$V_R = 6\text{V}$

Note: Reverse Voltage(V_R) Condition is applied to I_R test only The device is not designed for reverse operation

Output

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Peak Blocking Current	I_{DRM}	-	-	500	nA	$V_{DRM} = \text{Rated } V_{DRM}$ $I_F = 0\text{mA}$
Peak On-state Voltage	V_{TM}	-	-	2.5	V	$I_{TM} = 100\text{mA peak}$, $I_F = \text{Rated } I_{FT}$
Critical Rate of Rise off-state Voltage	$\frac{ELM302X}{ELM305X}$ dv/dt	600	-	-	V/ μs	$V_{PEAK} = 0.636 \times \text{Rated } V_{DRM}$, $I_F = 0\text{mA}$ (Fig.10)

Transfer Characteristics

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
LED Trigger Current	3022 3052	-	-	10	mA	Main terminal Voltage=3V*2
	3023 3053	-	-	5		
	3024 3054	-	-	3		
Holding Current	I_H	-	250		μA	

Notes:

*2. All devices are guaranteed to trigger at an I_F value over than max I_{FT}

Typical Electro-Optical Characteristics Curves

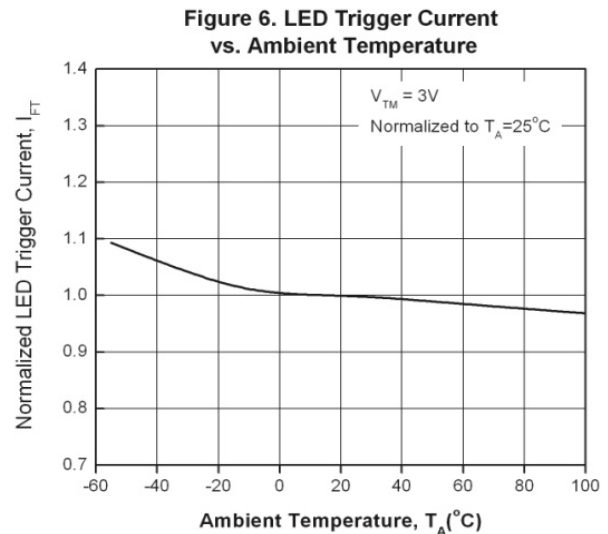
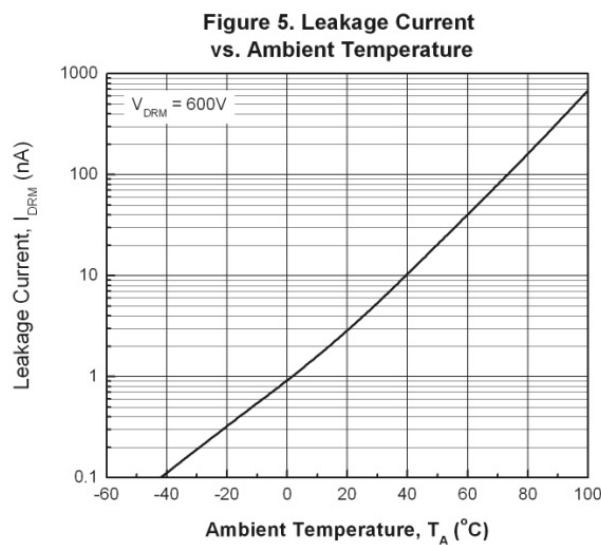
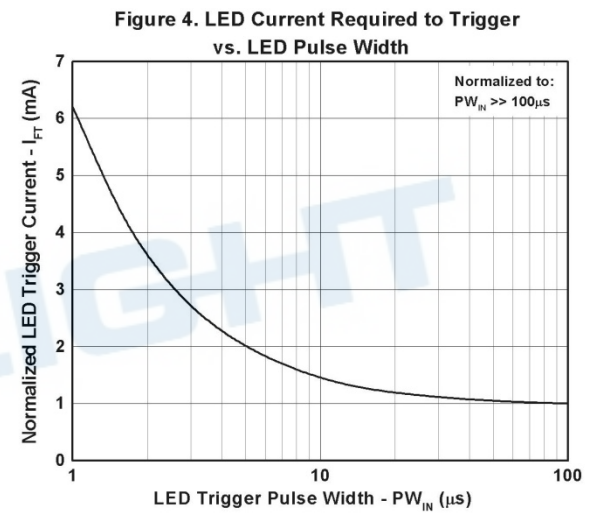
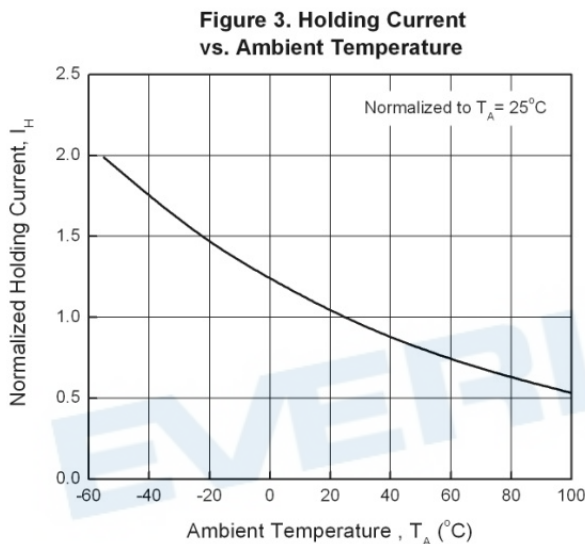
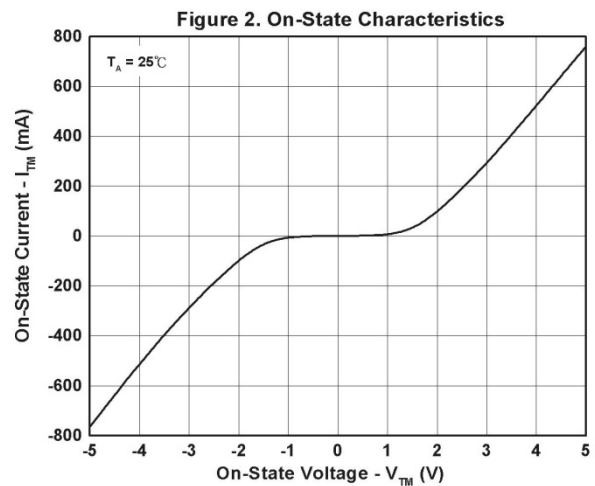
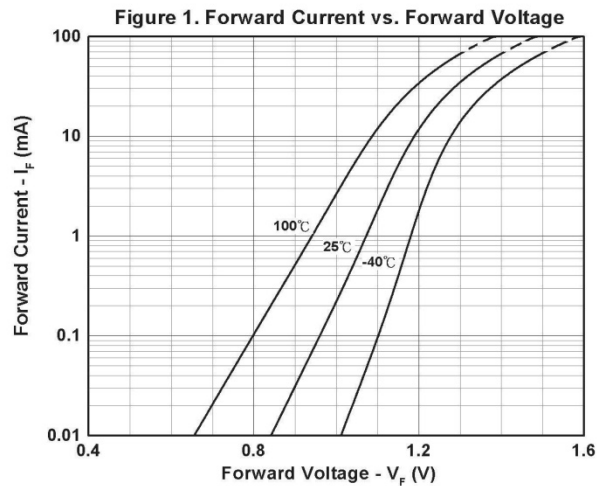


Figure 7. Off-State Output Terminal Voltage vs. Ambient Temperature

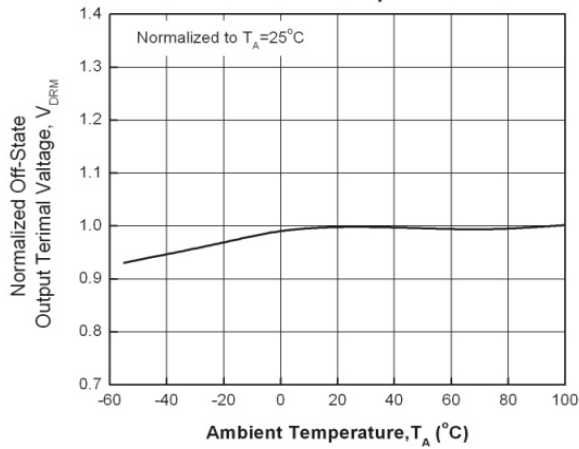


Fig 8. I_F Maximum rating vs Temperature



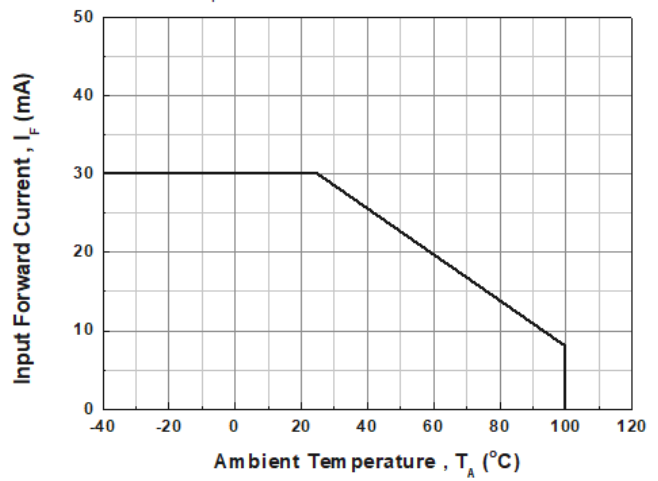


Fig 9. On-state Current vs Temperature

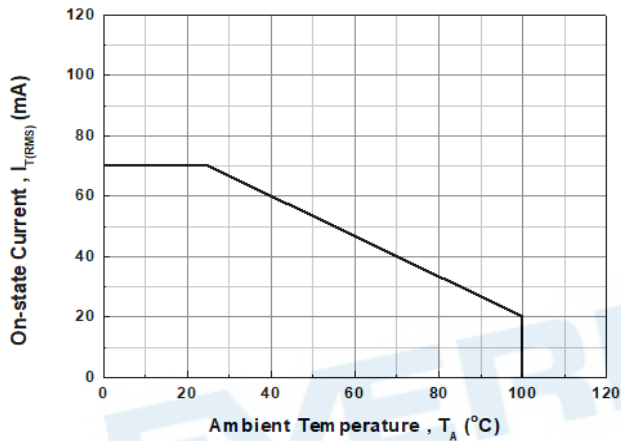

Note: The graphs shown in this datasheet are representing typical data only and do not show guaranteed values

Figure 10. Static dv/dt Test Circuit & Waveform

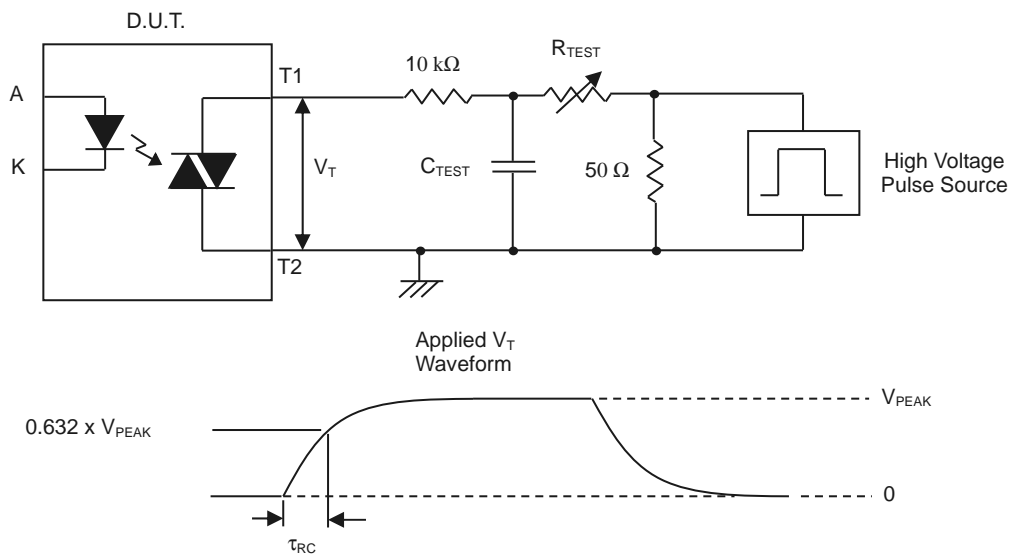

Measurement Method

The high voltage pulse is set to the required V_{PEAK} value and applied to the D.U.T. output side through the RC circuit above. LED current is not applied. The waveform V_T is monitored using a x100 scope probe. By varying R_{TEST} , the dv/dt (slope) is increased, until the D.U.T. is observed to trigger (waveform collapses). The dv/dt is then decreased until the D.U.T. stops triggering. At this point, τ_{RC} is recorded and the dv/dt calculated.

$$dv/dt = \frac{0.632 \times V_{PEAK}}{\tau_{RC}}$$

Order Information

Part Number


ELM302X(Z)-V
or **ELM305X(Z)-V**

Note


X = Part No. (2 ,3 or 4)
Z = Tape and reel option (TA, TB or none).
V = VDE safety approved (optional)

Option	Description	Packing quantity
None	Standard	100 units per tube
None	Standard + VDE safety optional	100 units per tube
(TA)	TA tape & reel option	3500 units per reel
(TB)	TB tape & reel option	3500 units per reel
(TA)-V	TA tape & reel option + VDE safety optional	3500 units per reel
(TB)-V	TB tape & reel option + VDE safety optional	3500 units per reel

Package Dimension (Dimensions in mm)

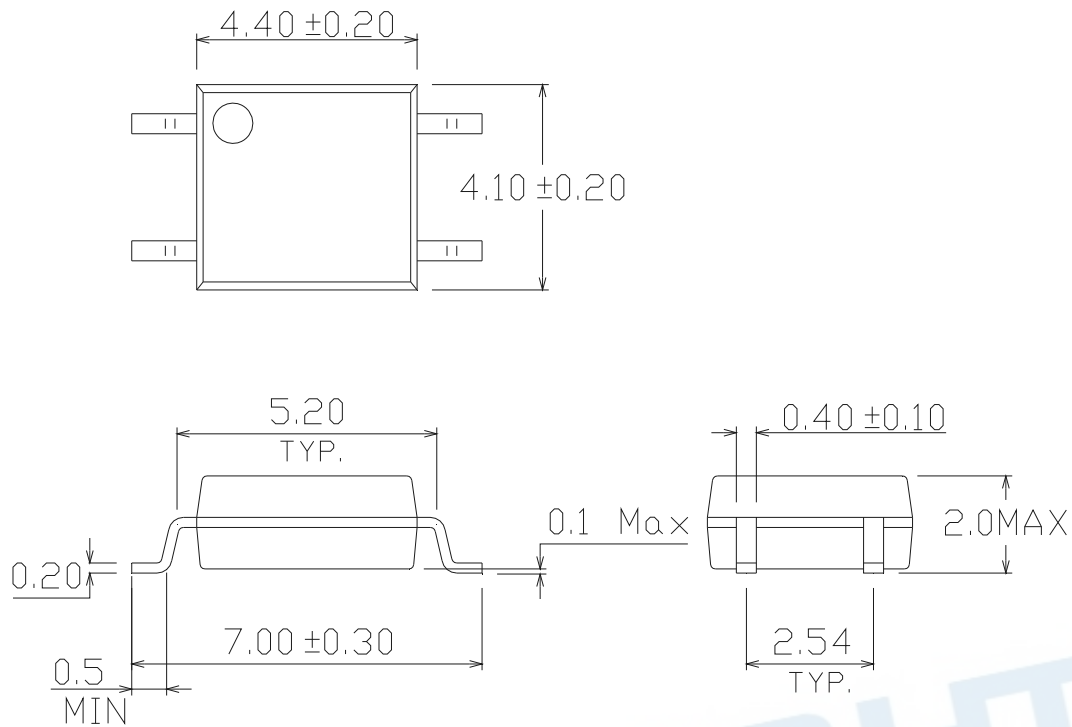

Recommended pad layout for surface mount leadform

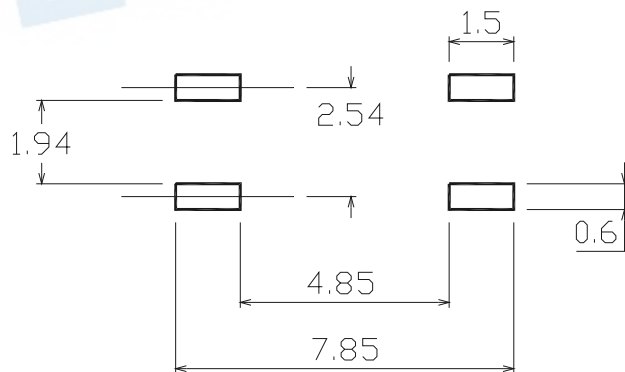

Device Marking



Notes

T	denotes Factory No code : made in China T : made in Taiwan
EL	denotes Everlight
M3054	denotes Device Number
Y	denotes 1 digit Year code
WW	denotes 2 digit Week code
V	denotes VDE safety option (optional)

EVERLIGHT

Label form

EVERLIGHT 11 → 月份

客戶料號 ← CPN: XXXXXXXXXXXX 測試區

億光料號 ← P/N: XXXXXXXXXXXX

億光品名 ← EL817M(C)-VG

生產周別 ← D/C: YWWX CAT: X QTY: 000000 → 包裝數量

生產序號 ← LOT NO: Y151130XXXXXXXXXX

標籤識別碼 ← REFERENCE: BTPyyMMddXXXXX

產地 ← MADE IN XXXXXX

RoHS 標示

CEC e US DVE → 安規標示

QR Code

or

RoHS 標示

EVERLIGHT 5 → 月份

客戶料號 ← CPN: XXXXXXXXXXXX 測試區

客戶品名 ← XXXXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX

億光料號 ← P/N: XXXXXXXXXXXX

億光品名 ← XXXXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX

生產序號 ← LOT NO: Y150516XXX-XXXXXXXXXX-XXXXXXXXXX

包裝數量 ← QTY: 0123456789 HUE: XXXXXXXXXXXX

CTR等級 ← CAT: XXXXXXXXXXXX REF: XXXXXXXXXXXX


標籤識別碼 ← REFERENCE: BTPYYMMDDXXXXX

MSL等級 ← MSL-XX MADE IN XXXXXX → 產地


CEC e US DVE → 安規標示

QR Code


TUBE Dimension

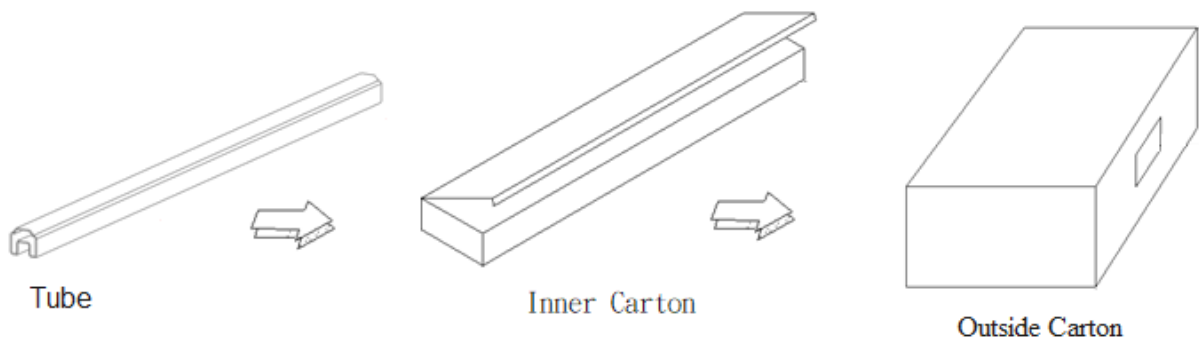

Reel Dimension



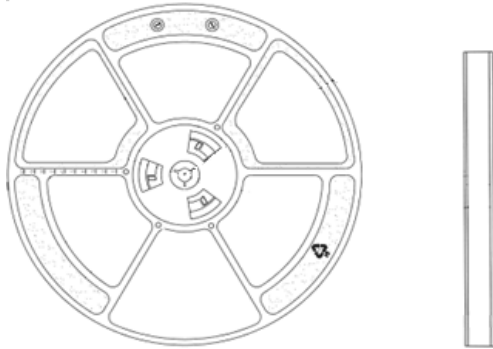


Moisture Resistant Packaging

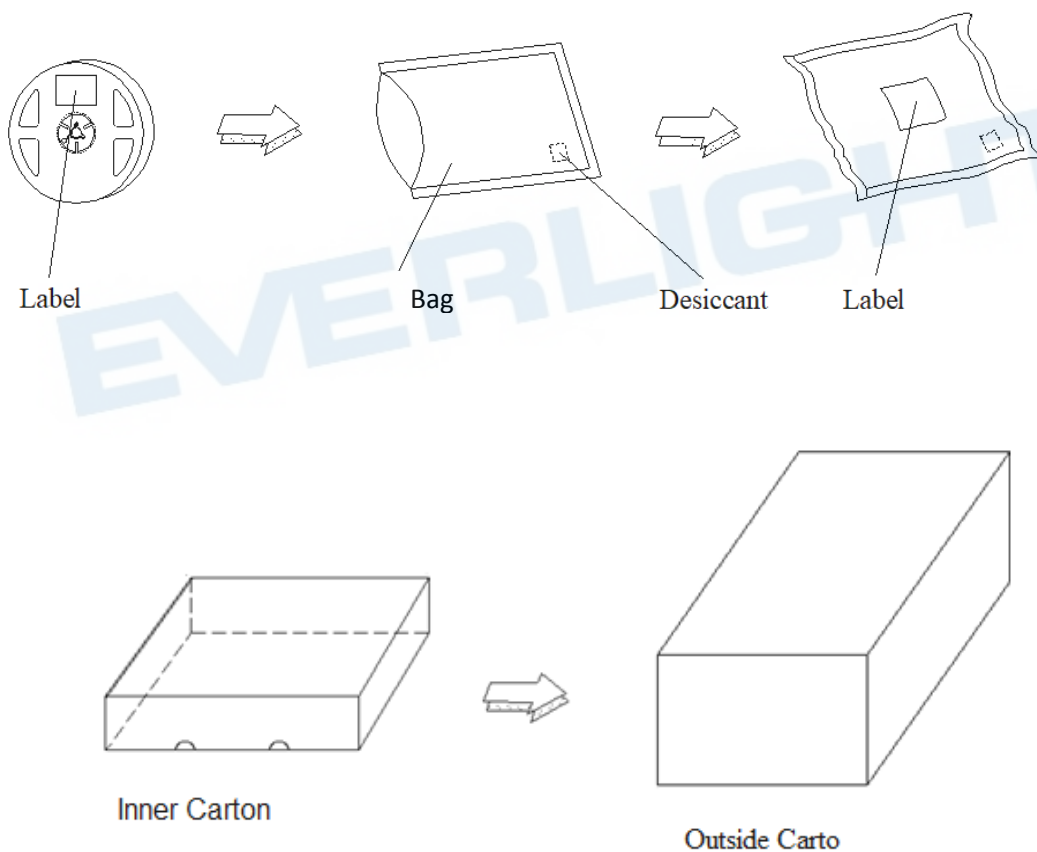




Tape & Reel Packing Specifications

Option TA

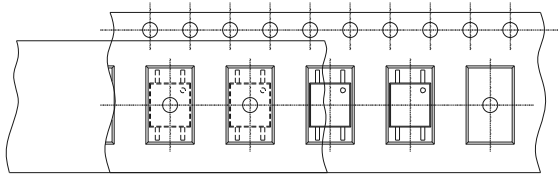


Direction of feed from reel

Option TB

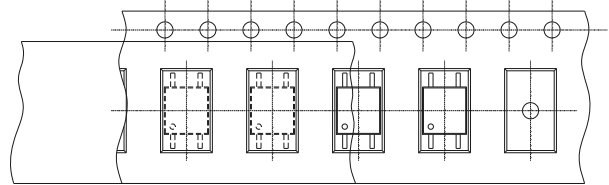

Direction of feed from reel

Tape dimensions

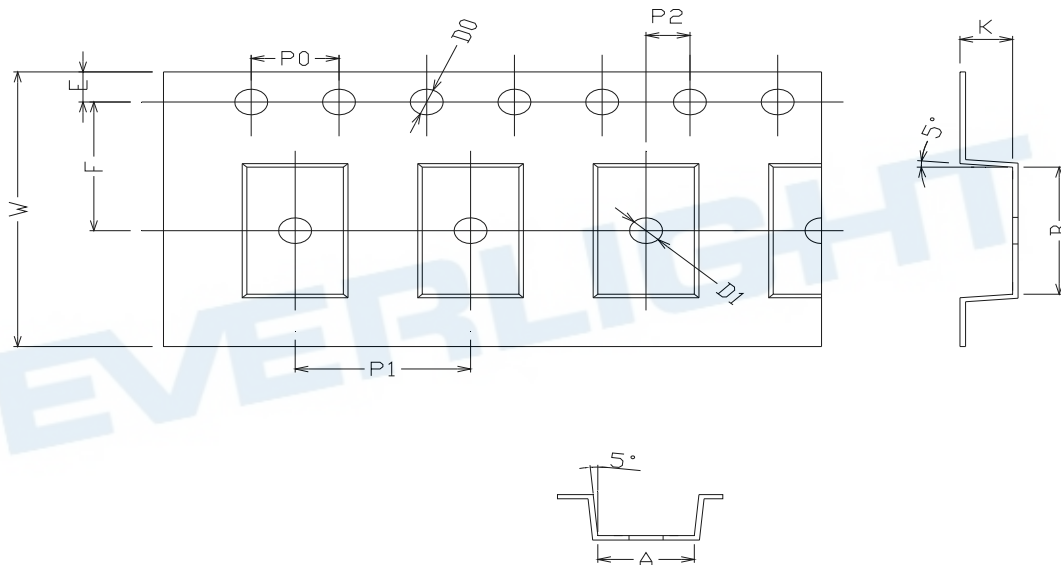


Dimension No.	A	B	Do	D1	E	F
Dimension (mm)	4.4 ± 0.1	7.4 ± 0.1	$1.5 + 0.1/-0$	1.5 ± 0.1	1.75 ± 0.1	7.5 ± 0.1

Dimension No.	Po	P1	P2	t	W	K
Dimension (mm)	4.0 ± 0.15	8.0 ± 0.1	2.0 ± 0.1	0.25 ± 0.03	16.0 ± 0.2	2.4 ± 0.1

Precautions for Use

1. Soldering Condition

1.1 (A) Maximum Body Case Temperature Profile for evaluation of Reflow Profile

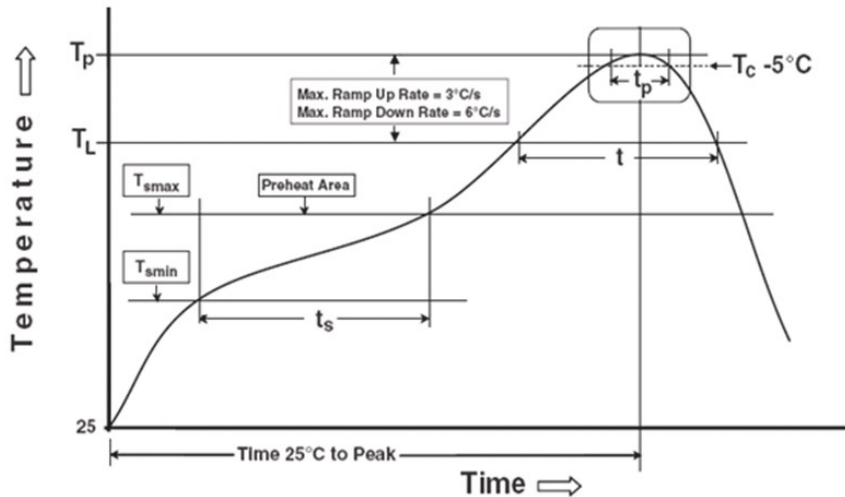

Note:

Reference: IPC/JEDEC J-STD-020D

Preheat

Temperature min (T_{smin})	150 °C
Temperature max (T_{smax})	200°C
Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds
Average ramp-up rate (T_{smax} to T_P)	3 °C/second max

Other

Liquidus Temperature (T_L)	217 °C
Time above Liquidus Temperature (t_L)	60-100 sec
Peak Temperature (T_P)	260°C
Time within 5°C of Actual Peak Temperature: $T_P - 5^\circ\text{C}$	30 s
Ramp- Down Rate from Peak Temperature	$6^\circ\text{C} / \text{second max.}$
Time 25°C to peak temperature	8 minutes max.
Reflow times	3 times

EN-60747-5-5 Insulation Related Characteristics

Description	Symbol	Rating	Unit
Climatic Classification	-	55/110/21	-
Pollution Degree	-	2	-
Maximum Working Insulation Voltage	V_{IORM}	707	V_{peak}
Input to Output Test Voltage, Method A $V_{IORM} \times 1.6 = V_{PR}$, Type and Sample Test, $t_m = 10s$, Partial Discharge < 5 pC	V_{PR}	1131	V_{peak}
Input to Output Test Voltage, Method B $V_{IORM} \times 1.875 = V_{PR}$, 100% Production Test with $t_m = 1s$, Partial Discharge < 5 pC	V_{PR}	1325	V_{peak}
Highest Allowable Overvoltage (Transient Overvoltage, $t_{ini} = 60s$)	V_{IOTM}	4800	V_{peak}
Safety Limiting Values (max. allowable ratings in case of fault, also refer to thermal derating curve)			
Temperature	T_s	150	°C
Input Current	$I_{S,INPUT}$	200	mA
Output Power	$P_{S,OUTPUT}$	350	mW
Insulation Resistance at T_s , $V_{IO} = 500 V$	R_s	10^9	Ω

Insulation and Safety Related Specification

Description	Symbol	Rating	Unit
Minimum Creepage Distance	Cr	5	mm
Minimum Clearance	Cl	5	mm
Minimum Insulation Distance	T_I	0.4	mm
Comparative Tracking Index	CTI	175	-

Precautions for General Storage

- Avoid storage locations where devices may be exposed to moisture or direct sunlight.
- Follow the precautions printed on the packing label of the device for transportation and storage.
- Keep the storage location temperature and humidity within a range of 5°C to 35°C and 20 % to 60 %, respectively.
- Do not store the products in locations with poisonous gases (especially corrosive gases) or in dusty conditions.
- Store the products in locations with minimal temperature fluctuations. Rapid temperature changes during storage can cause condensation, resulting in lead oxidation or corrosion, which will deteriorate the solderability of the leads.
- When restoring devices after removal from their packing, use anti-static containers.
- Do not allow loads to be applied directly to devices while they are in storage.
- If devices have been stored for more than two years under normal storage conditions, it is recommended that you check the leads for ease of soldering prior to use.

EVERLIGHT

DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
3. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
4. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.
5. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.
6. Statements regarding the suitability of products for certain types of applications are based on Everlight's knowledge of typical requirements that are often placed on Everlight products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Everlight's terms and conditions of purchase, including but not limited to the warranty expressed therein.