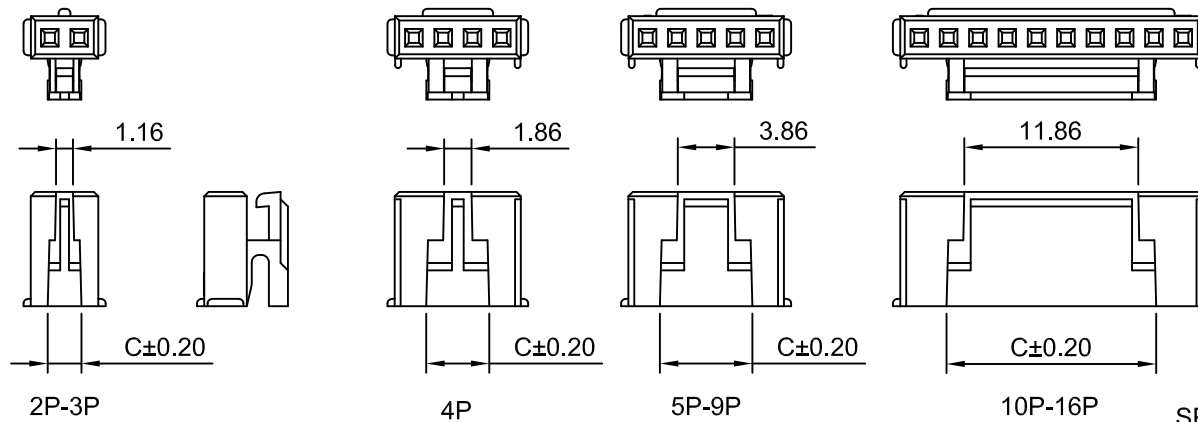


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	4.60	2.30	10P	18.00	20.60	14.30
3P	4.00	6.60	2.30	11P	20.00	22.60	14.30
4P	6.00	8.60	4.30	12P	22.00	24.60	14.30
5P	8.00	10.60	6.30	13P	24.00	26.60	14.30
6P	10.00	12.60	6.30	14P	26.00	28.60	14.30
7P	12.00	14.60	6.30	15P	28.00	30.60	14.30
8P	14.00	16.60	6.30	16P	30.00	32.60	14.30
9P	16.00	18.60	6.30				

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit		Scale	Sheet	TITLE	
mm		4:1	1 of 1	2.00mm PITCH HOUSING	
DRAWN	CHK'D	APPR			
Chengbiao Ye	Djankui Wan	Jack Yin			
9	General Tolerances	THIRD ANGLE PROJECTION			
8	x,x±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°		DRAWING NO.	REV A2	
0			A2008H-XP		

A2	CHANGE THE DRAWING	2023.06.09
A1	MODIFY DRAWING	2016.08.08
A0	NEW RELEASE	2009.05.10
REV	DESCRIPTION	DATE