

INTERCONNECTS

SERIES 340 & 399 • 1,27 AND 2,54 GRID SURFACE MOUNT HEADERS & SOCKETS • SINGLE ROW STRIPS

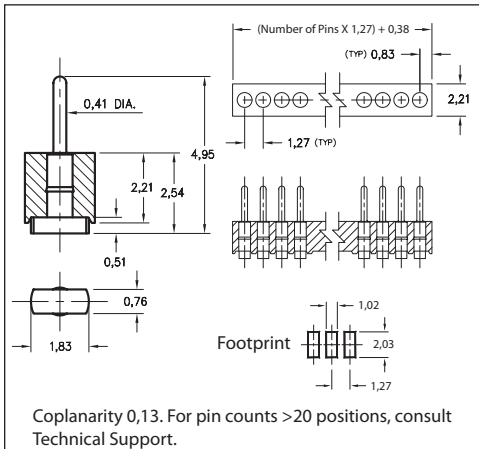


FIG. 1

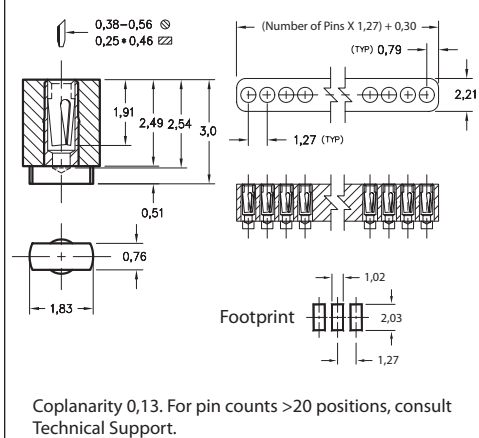


FIG. 2

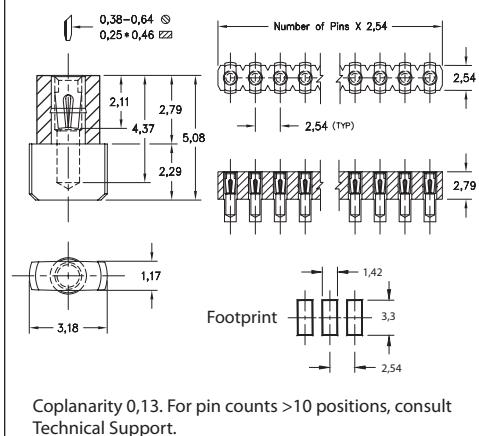


FIG. 3

- Series 340 and 399 interconnects are single row headers & sockets having unique surface mount "block" terminals
- "Block" termination makes the interconnects "self standing". This also minimizes profile and reduces the footprint compared with traditional "gullwing" designs
- Series 399 is a matched pair of 1,27 pitch sockets and headers with a mated height of only 5,54
- Series 340 is a 2,54 pitch SIP socket using a Hi-Rel, 4-finger BeCu #30 contact rated at 3 amps. See page 253 for details
- Insulators are high temperature thermoplastic, suitable for all soldering processes



ORDERING INFORMATION

FIG. 1	Series 399...310 Single Row 1,27 Grid Header	
	399-10-0	-00-310000
	Specify number of pins	02-50
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Environmental Data, See page 264		
SPECIFY PLATING CODE XX=		
Pin Plating	10	0,25µm Au
FIG. 2	Series 399...300 Single Row 1,27 Grid Socket	
	399-XX-0	-21-300000
	Specify number of pins	02-50
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Environmental Data, See page 264		
SPECIFY PLATING CODE XX=		
Sleeve (Pin)	91	41
Contact (Clip)	0,25µm Sn/Pb	0,25µm Sn
FIG. 3	Series 340...780 Single Row 2,54 Grid Socket	
	340-XX-1	-30-780100
	Specify number of pins	02-64
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Environmental Data, See page 264		
SPECIFY PLATING CODE XX=		
Sleeve (Pin)	99	44
Contact (Clip)	5,08µm Sn/Pb	5,08µm Sn
	2,54µm Sn/Pb	2,54µm Sn