

# MHC14S03

## 3dB 90° Directional Coupler



MECSINE 兆讯

### Applications

- 1, Low Insertion Loss For Power Combining
- 2, Doherty Power Amplifier
- 3, Small Cell & Pico
- 4, GNSS Antenna

### Features

- 1, Low Insertion Loss
- 2, High Isolation, 20 dB typ.
- 3, Excellent high-power capacity up to 5W
- 4, RoHS compliance (Pb-Free)

### Description

The MHC14S03 is a low cost, high performance 3 dB hybrid coupler in an easy to use surface mount package. The MHC14S03 is ideal for doherty power amplifier, circular polarized antenna and other applications where low insertion loss and tight amplitude and phase balance are required. MHC14S03 is constructed from ceramic filled PTFE composites which possess excellent electrical and mechanical stability. All components are 100% RF tested.

### Characteristics


Table 1. MHC14S03 Characteristics

Item	Min.	Type	Max.	Unit
Frequency Range	1150		1650	MHz
Isolation	18	20		dB
Insertion Loss		0.35	0.5	dB
Phase Unbalance	-5		+5	degrees
Amplitude	-0.5		+0.5	dB
Return Loss	18	20		dB
Operating Temp.	-40		+105	°C
Power			5	W

All the above data are based on specified demo board and tested in 25° environment.

### Port Configuration

Figure 1. MHC14S03 (Bottom View)



*All Use For RF & Microwave*

# MHC14S03

## 3dB 90° Directional Coupler




The MHC14S03 port configurations depending on how input signals are split. The Case 1, Case 2, Case 3, and Case 4, configurations mean that one input signal is split into two output signals. When port 1 is defined, the other ports are defined automatically

Table 2. MHC14S03 Port Configurations

Configuration	Port 1	Port 3	Port 4	Port 6
Case1.	Input	Isolated	Direct -3dB, -90°	Coupling -3dB, 0°
Case2.	Isolated	Input	Coupling -3dB, 0°	Direct -3dB, -90°
Case3.	Direct -3dB, -90°	Coupling -3dB, 0°	Input	Isolated
Case4.	Coupling -3dB, 0°	Direct -3dB, -90°	Isolated	Input

### Outline Drawing

Figure 2. MHC14S03 Outline Drawing

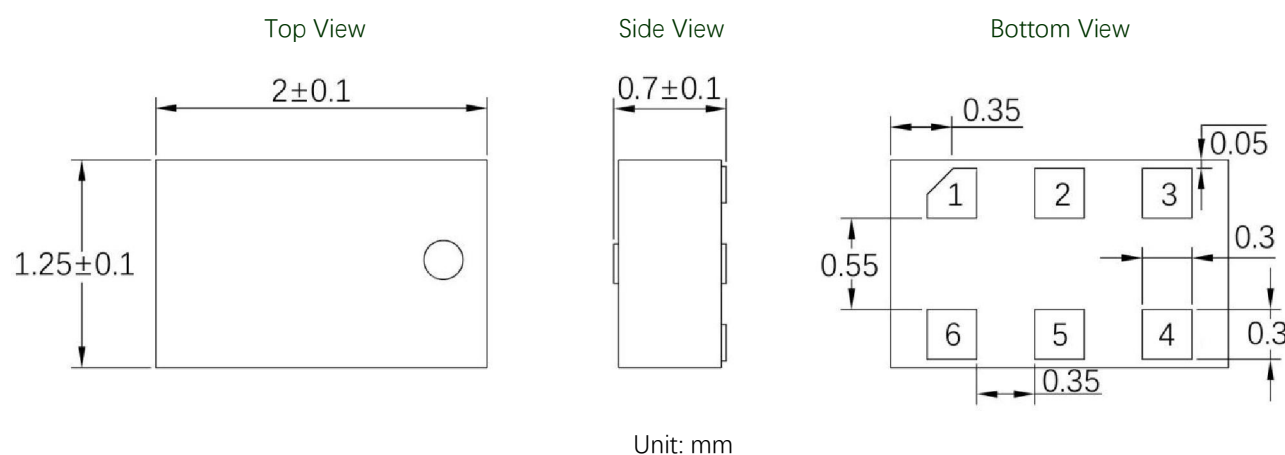

### Typical Performance (25°C, 1150-1650 MHz)

Figure 3. MHC14S03 Coupling


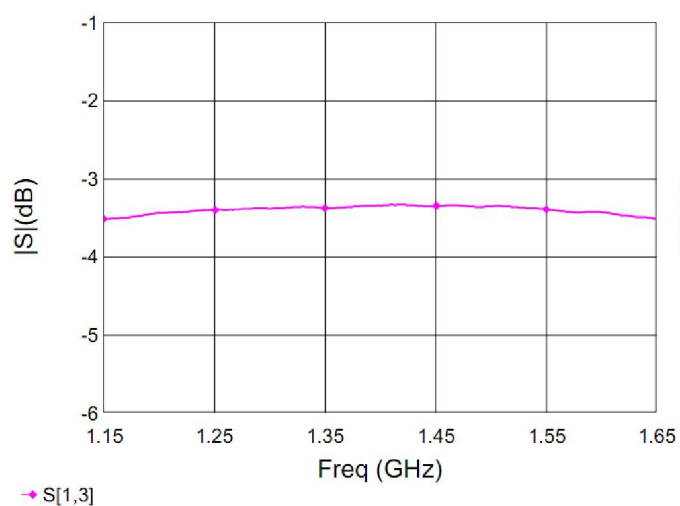


Figure 4. MHC14S03 Transmission

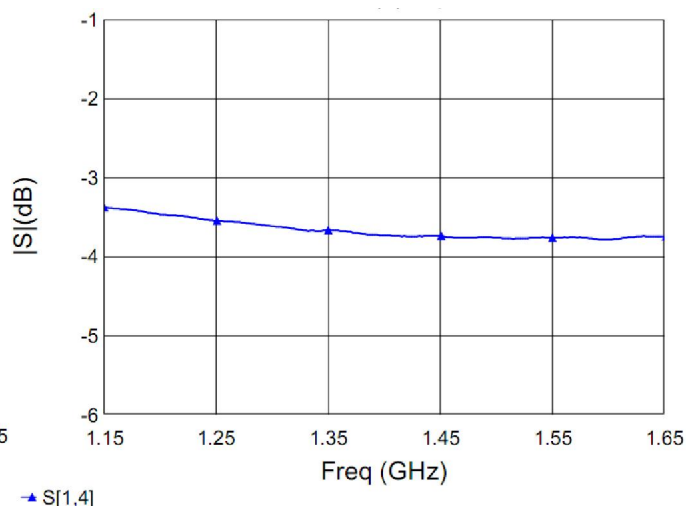

All Use For RF & Microwave

# MHC14S03

3dB 90° Directional Coupler



MECSINE 兆讯

Figure 5. MHC14S03 Return Loss (S11)

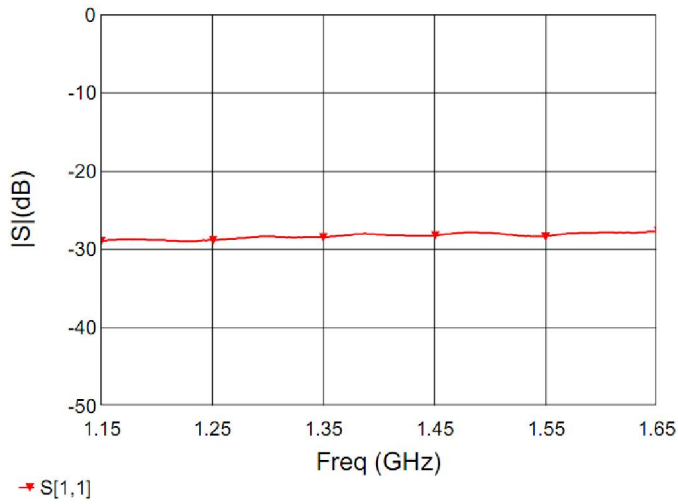


Figure 6. MHC14S03 Return Loss (S22)

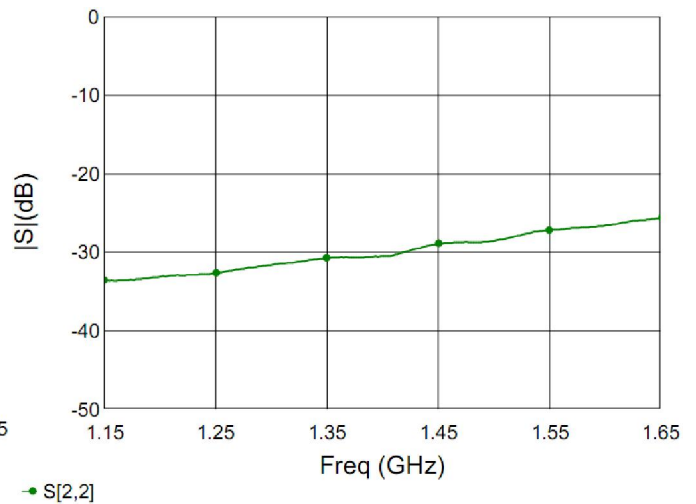


Figure 7. MHC14S03 Return Loss (S33)

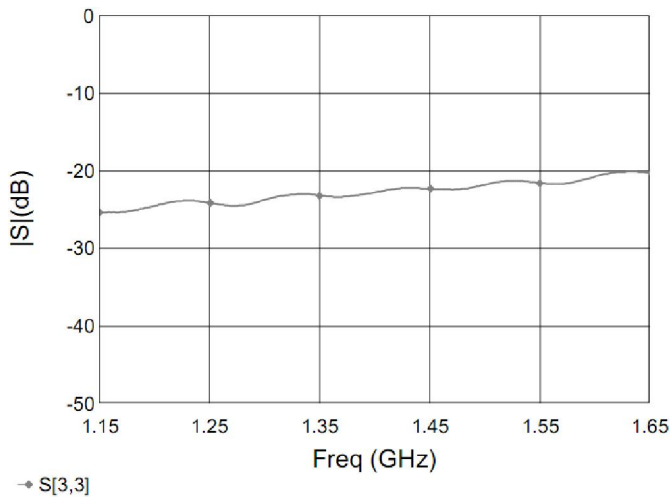


Figure 8. MHC14S03 Return Loss (S44)

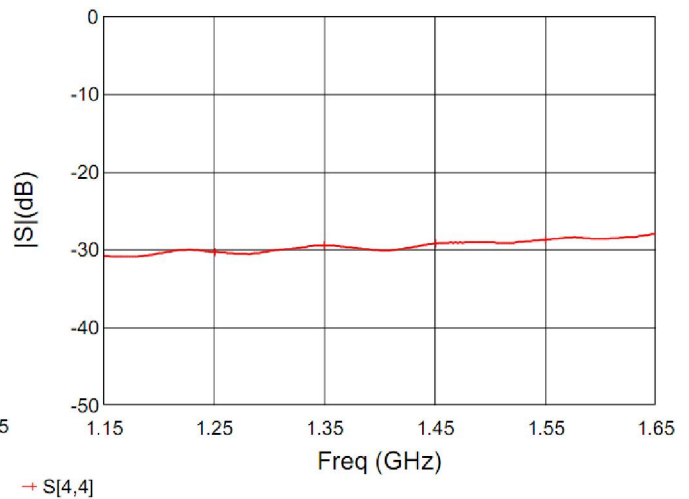


Figure 9. MHC14S03 Isolation


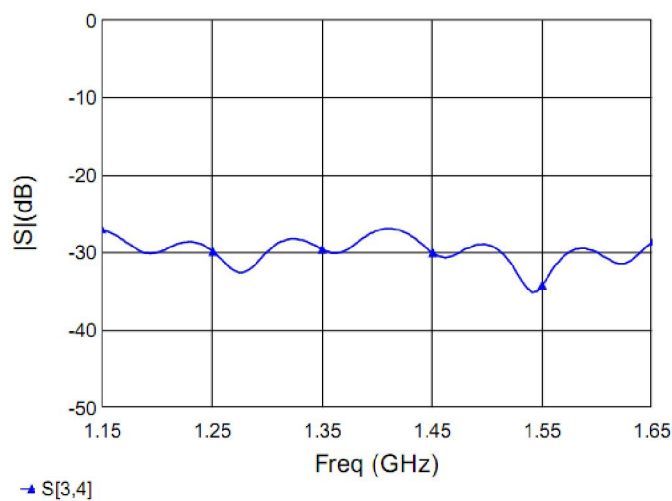


Figure 10. MHC14S03 Phase

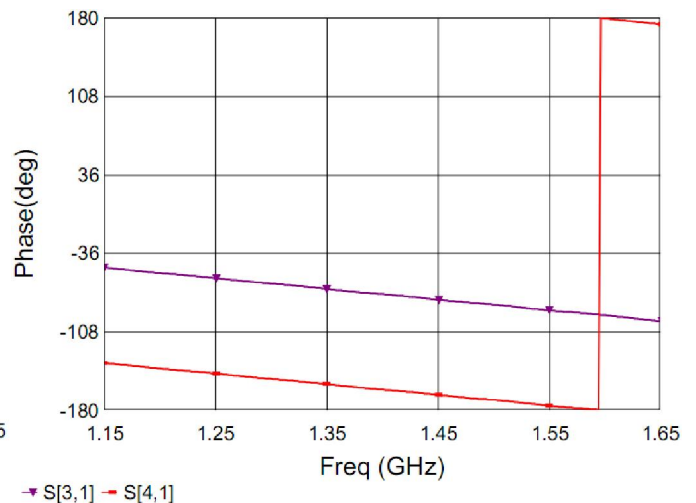

All Use For RF & Microwave


### Definition of Measured Specifications

Table 3. Mathematical Formula for the MHC14S03 Parameters

Parameter	Definition	Mathematical Representation
VSWR (Voltage Standing Wave Ratio)	The impedance match of the coupler to a 50W system. A VSWR of 1:1 is optimal.	$VSWR = \frac{V_{max}}{V_{min}}$ Vmax = voltage maxima of a standing wave Vmin = voltage minima of a standing wave
Return Loss	The impedance match of the coupler to a 50W system. Return Loss is an alternate means to express VSWR.	$\text{Return Loss (dB)} = 20 \log \frac{VSWR+1}{VSWR-1}$
Insertion Loss	The input power divided by the sum of the power at the two output ports.	$\text{Insertion Loss (dB)} = 10 \log \frac{P_{in}}{P_{cp1} + P_{transmission}}$
Isolation	The input power divided by the power at the isolated port.	$\text{Isolation (dB)} = 10 \log \frac{P_{in}}{P_{iso}}$
Phase Balance	The difference in phase angle between the two output ports.	Phase at coupled port – Phase at transmission port
Amplitude Balance	The power at each output divided by the average power of the two outputs.	$10 \log \frac{P_{cp1}}{\frac{P_{cp1} + P_{transmission}}{2}} \text{ and } 10 \log \frac{P_{transmission}}{\frac{P_{cp1} + P_{transmission}}{2}}$

### Recommended PCB Layout

Figure 11. Recommended PCB Layout

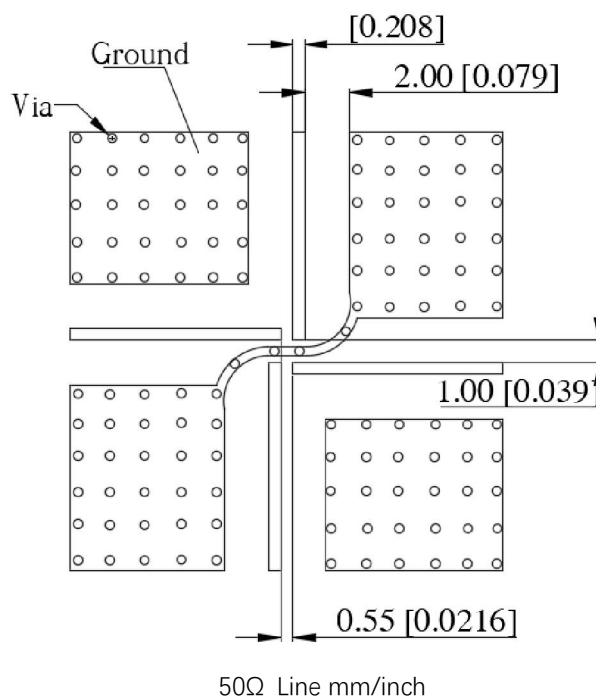

### Reflow Profile

All Use For RF & Microwave


# MHC14S03

3dB 90° Directional Coupler

MiPD®


MECSINE 兆讯

Figure 12. MHC14S03 Thermal Reflow Profile

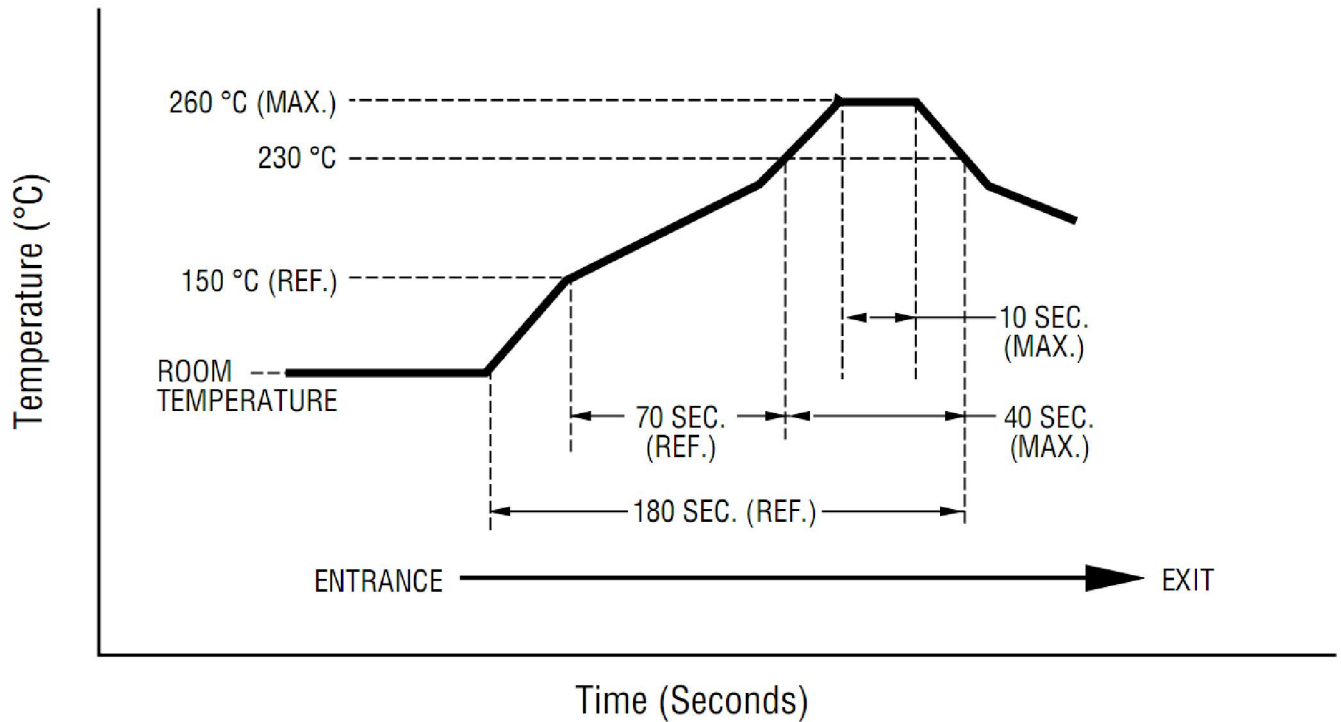

## Packaging and Ordering Information

Figure 13. MHC14S03 Packaging Information

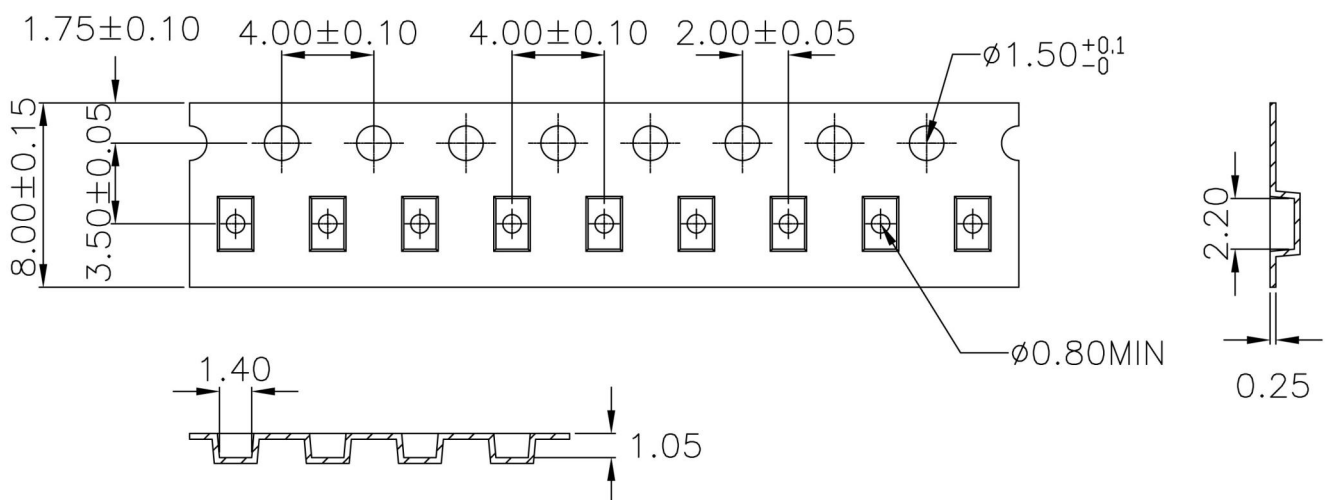

All Use For RF & Microwave

# MHC14S03

3dB 90° Directional Coupler

MiPD<sup>®</sup>

MECSINE兆讯

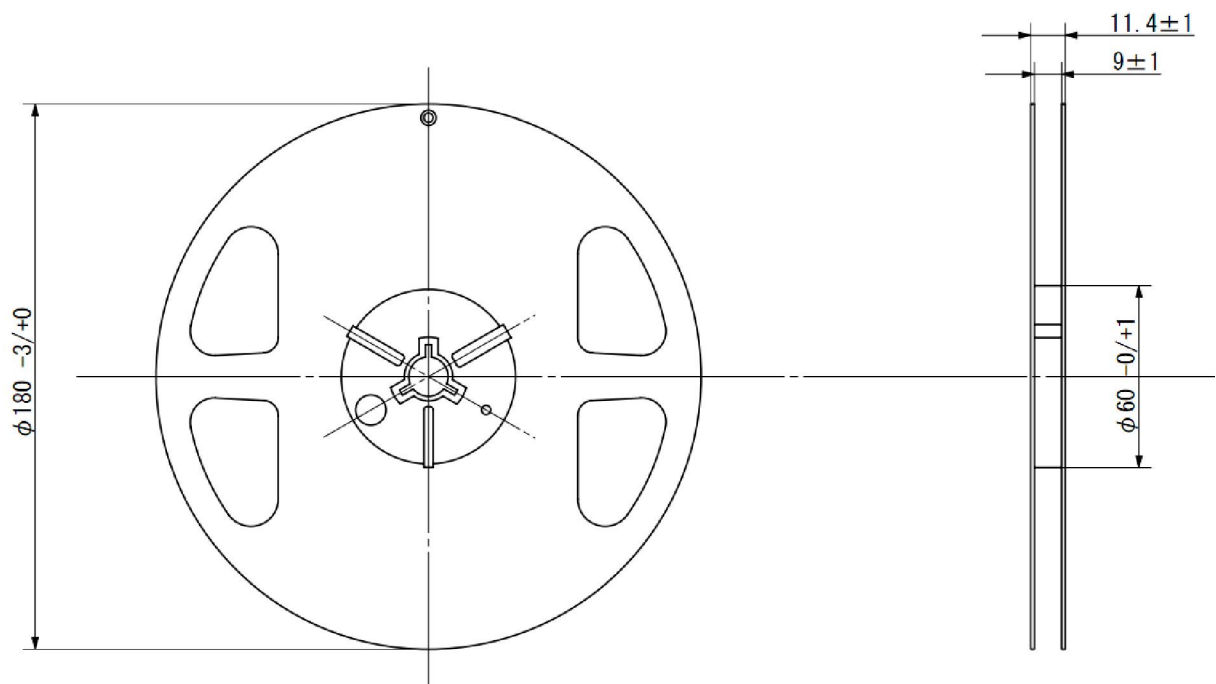


Table 4. MHC14S03 Ordering Information

Device	Package	Reel	Shipping
MHC14S03	2.0*1.25mm	7"	4000 Reel

Revision	Description	Date
Rev0	Preliminary	2024/2/26