DESCRIPTION

The TL431AIDBZR-CN device is three-terminal adjustable shunt regulators, with a guaranteed thermal stability over applicable temperature ranges.The output voltage can be set to any value between VREF (approximately 2.5V) and 36V with two external resistors. These devices have provided a very sharp turn-on characteristic, making these devices excellent replacement for Zener diodes in many applications.

The TL431AIDBZR-CN device is offered in two grades, with initial tolerances (at 25°C) of 0.5% and 1%, for A and B grade.


FEATURES

- Programmable Precise Output Voltage from 2.5V to 36V
- Low Dynamic Output Impedance 0.2 Ω
- High Stability under Capacitive Load
- Low Temperature Deviation
- Low Output Noise Voltage
- Sink Current Capability of 0.5mA to 100mA
- Operation Junction Temperature from -40°C to 125°C
- Lead-Free Packages: SOT23


APPLICATIONS

- Voltage Adapter
- Charger
- Switching Power Supply
- Voltage Monitoring
- Adjustable Referencing
- Zener Replacement

Simplified Schematic

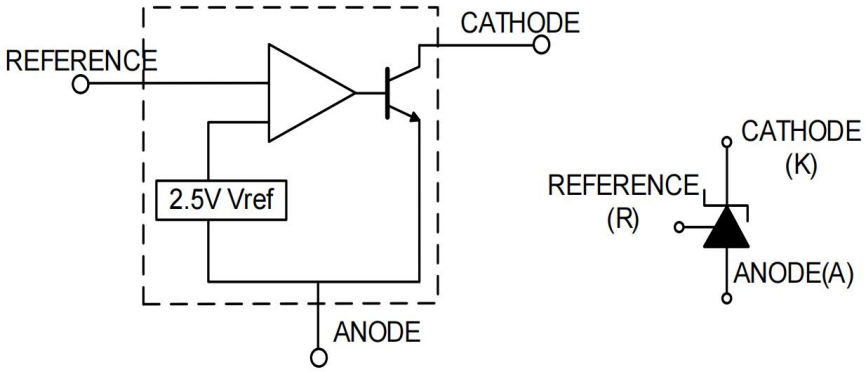

Pin Configuration

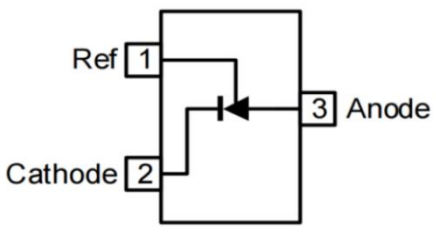NUMBER	NAME	DESCRIPTION	Top View
1	Ref(R)	Threshold relative to common anode	
2	Cathode(K)	Shunt Current/ Voltage input	
3	Anode(A)	Common pin, normally connected to ground	

Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted)

SYMBAL	PARAMETER	MIN	MAX	UNIT
V_{KA}	Cathode Voltage	-0.3	37	V
I_{KA}	Cathode Current Range (Continuous)	-100	130	mA
I_{REF}	Reference Input Current Range	-0.05	10	mA
P_D	Power Dissipation		300	mW
T_J	Operating junction temperature	-40	+150	℃
T_S	Storage Temperature Range	-55	+150	℃

Note: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device.

Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted)

SYMBAL	PARAMETER	MIN	TYP	MAX	UNIT
V_{KA}	Cathode Voltage	V_{REF}		36	V
I_{KA}	Cathode Current Range (Continuous)	0.5		100	mA
T_A	Junction Temperature	-40	+25	+125	℃

Electrical Characteristics

(At T_A=25℃, unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNIT
Reference Input Voltage	V_{REF}	$V_{KA}=V_{REF}, I_{KA}$=10mA	0.5%	2.488	2.50	2.512	V
			1%	2.475	2.50	2.525	V
Deviation of Reference Input Voltage Over temperature	ΔV_{REF}	$V_{KA}=V_{REF}$, I_{KA}=10mA, T_A=-40~+125℃		-	20	60	mV
Ratio of Change in Reference Voltage to the Change in Cathode Voltage	$\Delta V_{REF}/\Delta V_{KA}$	I_{KA}=10mA, ΔV_{KA}=10V~V_{REF}		-	-1.2	-2	mV/V
		I_{KA}=10mA, ΔV_{KA}=36V~10V		-	-1.5	-2	
Reference Input Current	I_{REF}	I_{KA}=10mA, R1=10kΩ, R2=∞		-	1.5	3	uA
Deviation of Reference Input Current Over Full Temperature Range	ΔI_{REF}	I_{KA}=10mA, R1=10kΩ, R2=∞ T_A=-40~+125℃		-	2	5	uA
Minimum cathode current for regulation	I_{KA}(MIN)	$V_{KA}=V_{REF}$		-	0.3	0.5	mA
Off-state Cathode Current	I_{KA}(OFF)	V_{KA}=36V, V_{REF}=0V		-	0.05	0.5	uA
Dynamic Impedance	Z_{KA}	$V_{KA}=V_{REF}$, I_{KA}=1mA~100mA, f≤1.0kHz		-	0.2	0.5	Ω

Test Circuit




Figure 1. Test Circuit for $V_{KA}=V_{REF}$




Figure 2. Test Circuit for $V_{KA} \geqslant V_{REF}$




Figure 3. Test Circuit for $I_{KA(OFF)}$

Typical Application

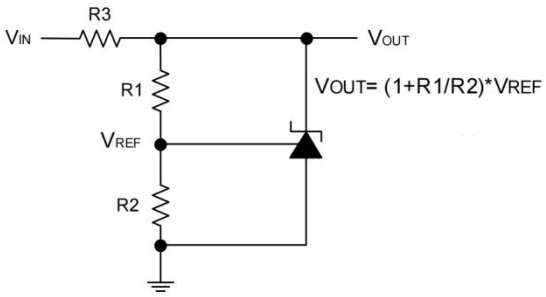


Figure 4. Shunt Regulator

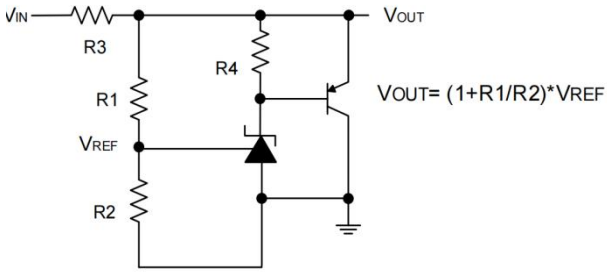


Figure 5. High Current Shunt Regulator



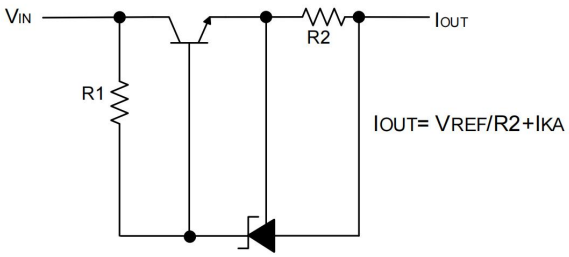


Figure 6. Current Source or Current Limit


PACKAGE OUTLINE DIMENSIONS


SOT23-3

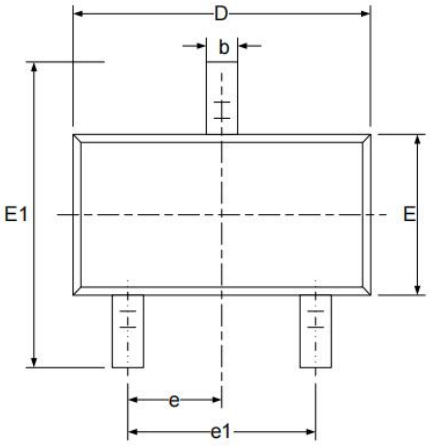



RECOMMENDED LAND PATTERN (Unit: mm)

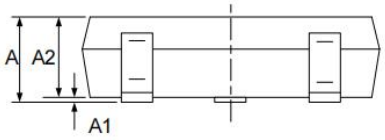

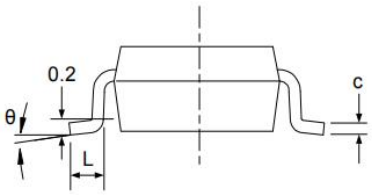

SYMBOL	MILLIMETER			SYMBOL	MILLIMETER		
	MIN	NOM	MAX		MIN	NOM	MAX
A	0.900	-	1.150	E	1.200	-	1.400
A1	0.000	-	0.100	E1	2.250	-	2.550
A2	0.900	-	1.050	e	0.950 BSC		
b	0.300	-	0.500	e1	1.800	-	2.000
c	0.080	-	0.150	L	0.300	-	0.500
D	2.800	-	3.000	θ	0°	-	8°

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.
本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.
此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website http://www.chipnobo.com, or consult your nearest Chipnobo sales office for further assistance.
欲了解更多信息，请访问我们的网站 http://www.chipnobo.com，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。