ADJUSTABLE HIGH PRECISION SHUNT REGULATOR


■GENERAL DESCRIPTION

The **NJM2820**/ **2821**/ **2822** is a 1.25V precision shunt regulator.

High precision voltage accuracy of ±0.7%* is realized by the total optimization from chip design to packaging. In addition, it features low cathode current of 80uA for low current operation.

It is suitable for AC-DC converter secondary circuit, reference voltage applications for A/D and D/A converters, and other applications where precision reference is required.

■PACKAGE OUTLINE




NJM2820F
NJM2821F
NJM2822F


■FEATURES

- High Precision Voltage Reference 1.250V±0.7%
- Flow Soldering*
- Minimum Input Current 80uA typ.
- Operating Voltage V_{REF} to 13V
- Adjustable Output Voltage
- Bipolar Technology
- Package Outline MTP5


■BLOCK DIAGRAM

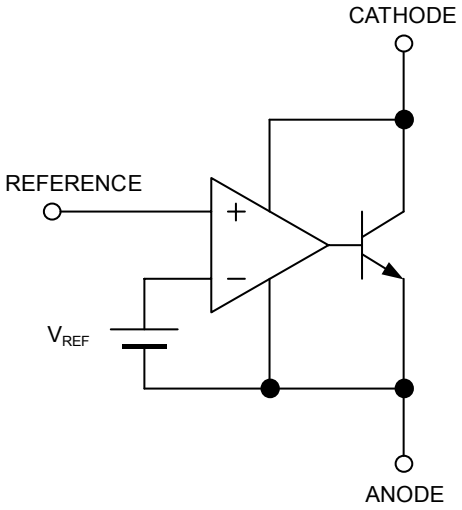


■PIN CONFIGURATION

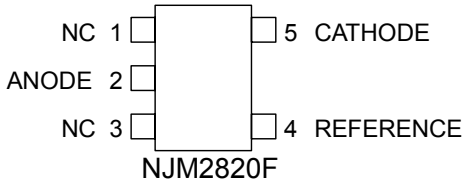

NJM2820F

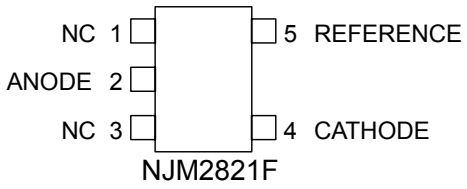

NJM2821F

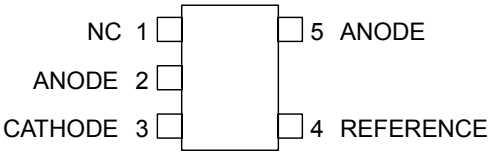

NJM2822F

* These contents are based on the result that evaluated the arbitrary sample. The characteristic is not guaranteed. The design and reliability that fully considered flow mounting are checked but the influence by temperature profile etc. is also considered. Please consult with sales representatives for a recommendation temperature profile.

■ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	MAXIMUM RATINGS	UNIT
Cathode Voltage	V_{KA}	14	V
Continuous Cathode Current	I_K	-30 ~ 50	mA
Reference Input Current	I_{REF}	-10 ~ 0.05	mA
Power Dissipation	P_D	(MTP5) 200	mW
Operating Temperature Range	T_{OPR}	-40 ~ +85	°C
Storage Temperature Range	T_{STG}	-40 ~ +150	°C

■RECOMMENDED OPERATING CONDITIONS (Ta=25°C)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Cathode Voltage	V_{KA}	V_{REF}	–	13	V
Cathode Current	I_K	0.5	–	30	mA

■ELECTRICAL CHARACTERISTICS (I_K=1mA,Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Reference Voltage	V_{REF}	$V_{KA}=V_{REF}$	(*1)	1241	1250	1259	mV
Reference Voltage Change vs. Cathode Voltage Change	$\Delta V_{REF}/\Delta V_{KA}$	$\lvert V_{REF}\rvert \le V_{KA} \le 5V$	(*2)	–	–	±2.7	mV/V
		$5V \le V_{KA} \le 13V$	(*2)	–	–	±2.0	mV/V
Reference Input Current	I_{REF}	R1=10kΩ, R2=∞	(*2)	–	2.0	4.0	uA
Minimum Input Current	I_{MIN}	$V_{KA}=V_{REF}$, ΔV_{REF}=1%	(*1)	–	80	500	uA
Cathode Current (Off Cond.)	I_{OFF}	V_{KA}=13V, V_{REF}=0V	(*3)	–	0.01	1.0	uA
Dynamic Impedance	$\lvert Z_{KA}\rvert$	$V_{KA}=V_{REF}$, f≤1kHz 0.5mA≤I_K≤30mA	(*1)	–	0.12	–	Ω

■TEMPERATURE CHARACTERISTICS (I_K=1mA,Ta=-40°C ~ 85°C)

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Reference Voltage Change	ΔV_{REF}	$V_{KA}=V_{REF}$	(*1)	–	±10	–	mV
Reference Input Current Change	ΔI_{REF}	R1=10kΩ,R2=∞	(*2)	–	0.5	–	uA

$\lvert V_{REF}\rvert$ ···Reference voltage includes error.

(*1): Test Circuit (Fig.1)

(*2): Test Circuit (Fig.2)

(*3): Test Circuit (Fig.3)

In case of NJM2822, all electrical characteristics are measured referencing to the anode terminal of PIN 5.

■TEST CIRCUIT

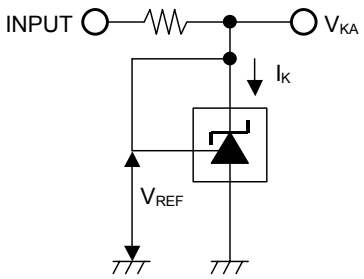


Fig.1 $V_{KA}=V_{REF}$ to test circuit

$V_O=V_{KA}=V_{REF}$

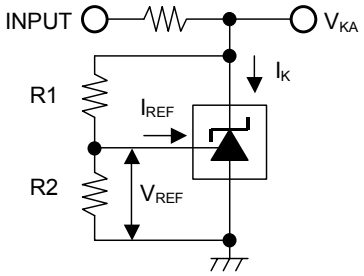


Fig.2 $V_{KA}>V_{REF}$ to test circuit

$$V_O = V_{KA} = V_{REF}\left(1+\frac{R1}{R2}\right)+I_{REF}\times R1$$

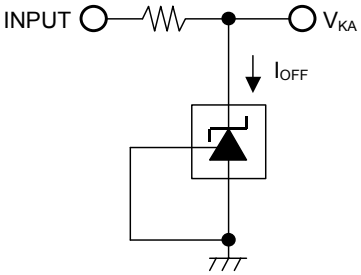


Fig.3 I_{OFF} to test circuit


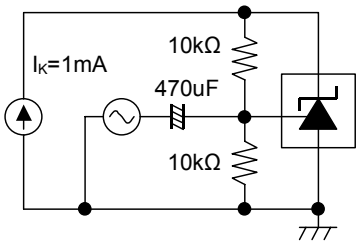



Fig.4 Gain and Phase to test circuit

■POWER DISSIPATION VS. AMBIENT TEMPERATURE

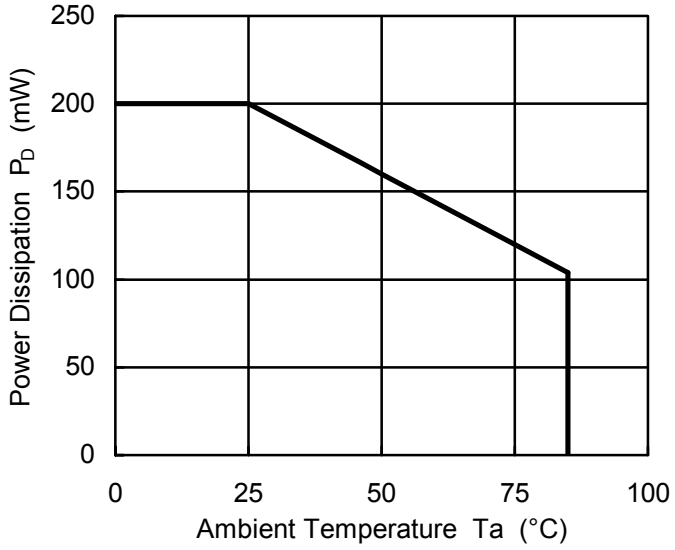


■TYPICAL CHARACTERISTICS


Reference Voltage vs. Cathode Current
(V_{KA}=V_{REF},Ta=25°C)

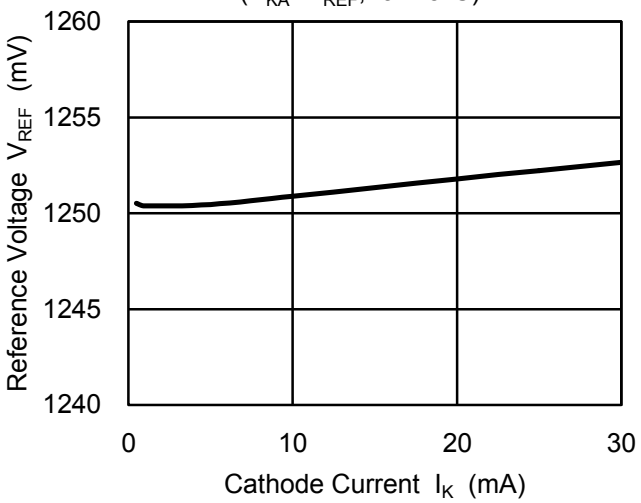


Reference Voltage vs. Cathode Current
(V_{KA}=V_{REF},Ta=25°C)

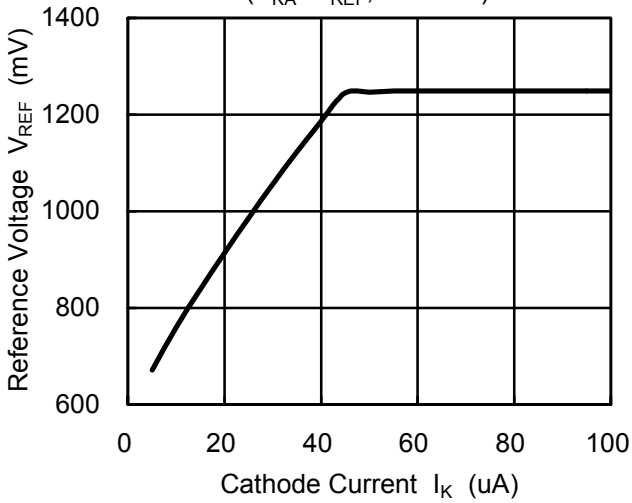


Reference Voltage Change vs. Cathode Voltage
(I_K=1mA,R1=Variable,R2=10kΩ,Ta=25°C)

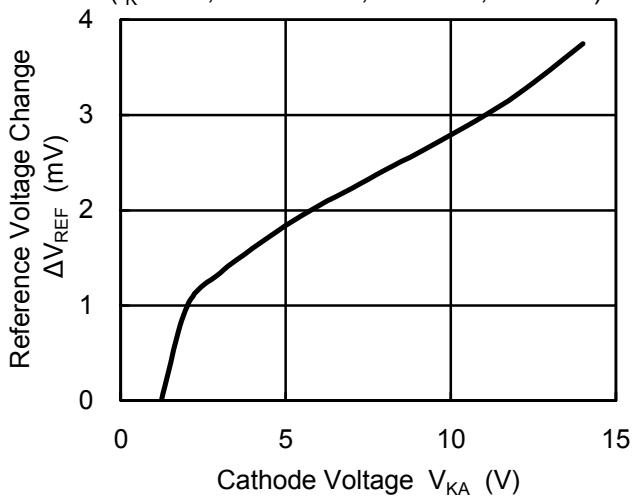


Cathode Current (Off Cond.) vs. Cathode Voltage
(V_{REF}=0V,Ta=25°C)

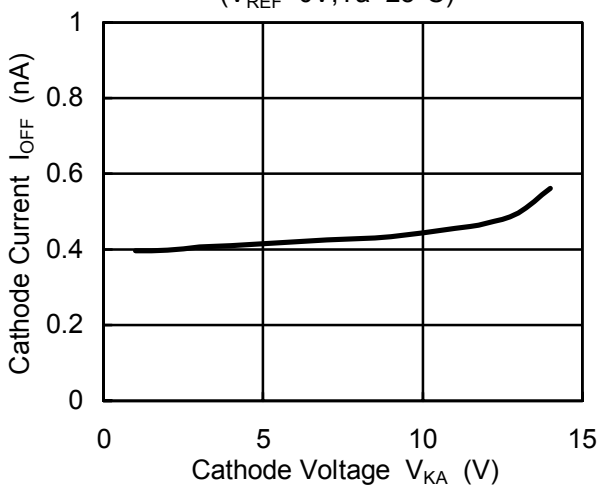

Dynamic Impedance
(I_K=0.5~30mA,V_{KA}=V_{REF},Ta=25°C)

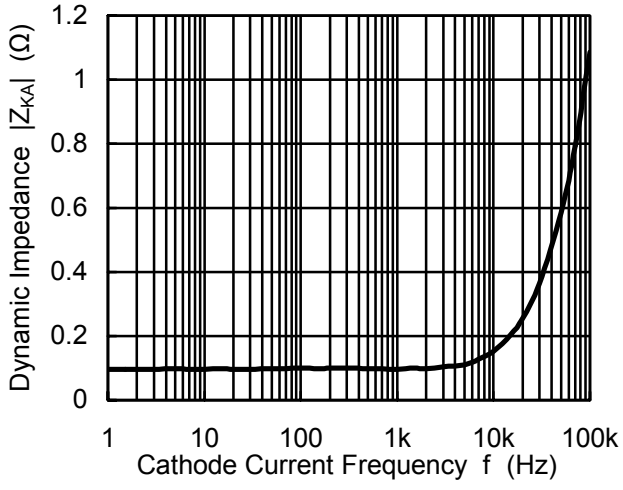


Voltage Gain · Phase vs. Frequency
(Fig.4 Test Circuit,Ta=25°C)

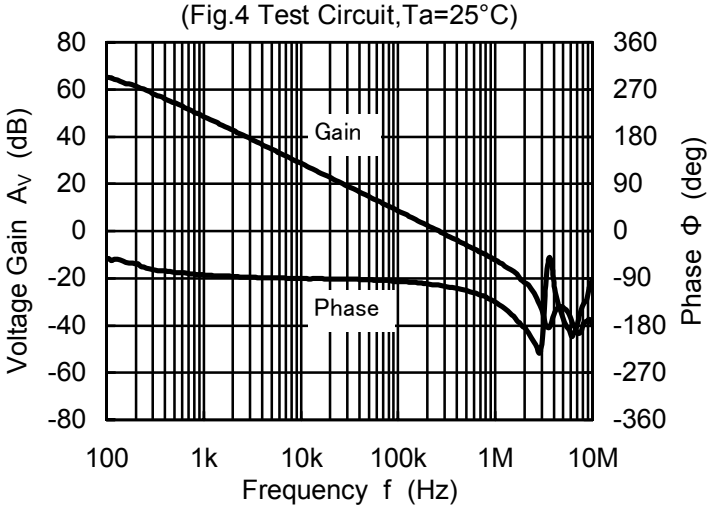


■TYPICAL CHARACTERISTICS

Sefty Operating Boundary Condition
(V_{KA}=V_{REF},Ta=25°C)

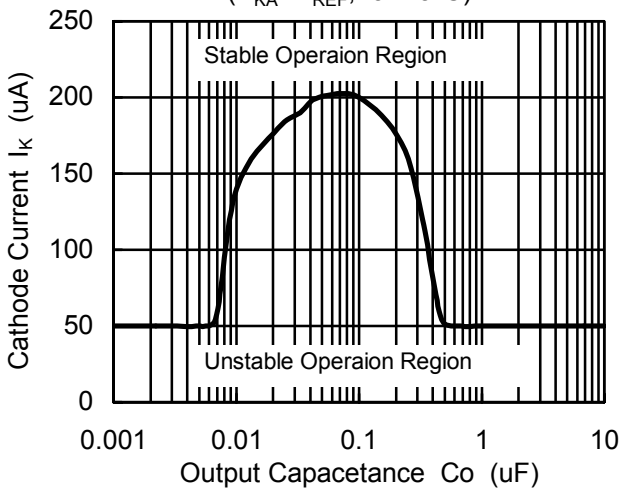


Note) Oscillation might occur while operating within the range of safety curve.
So that, it is necessary to make ample margins by taking considerations of fluctuation of the device.


Reference Voltage vs. Temperature
(I_K=1mA,V_{KA}=V_{REF})

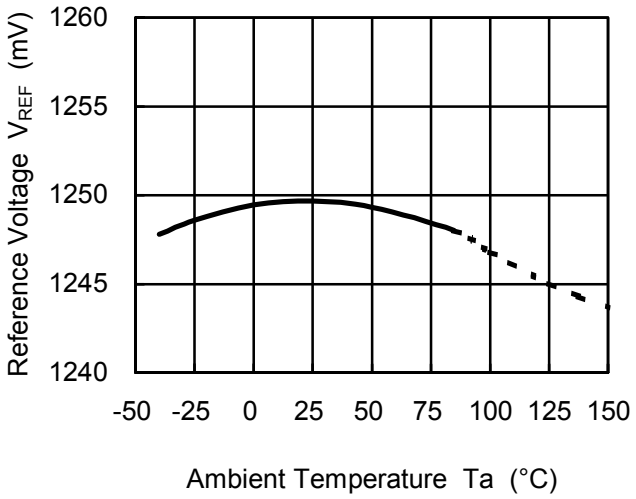


Reference Input Current vs. Temperature
(I_K=1mA,R1=10kΩ,R2=∞)

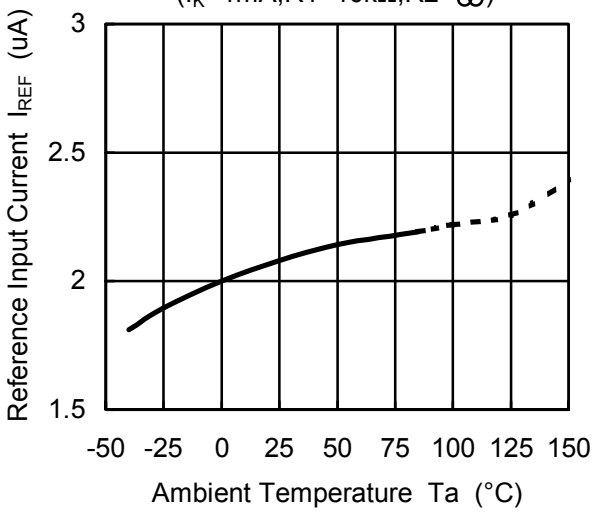

Cathode Current (Off Cond.) vs. Temperature
(V_{KA}=13V,V_{REF}=0V)

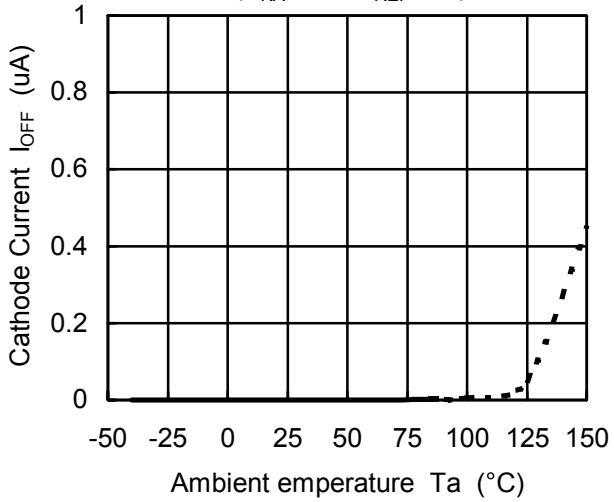

Output Noise Voltage vs. Temperature
(I_K=1mA,V_{KA}=V_{REF})

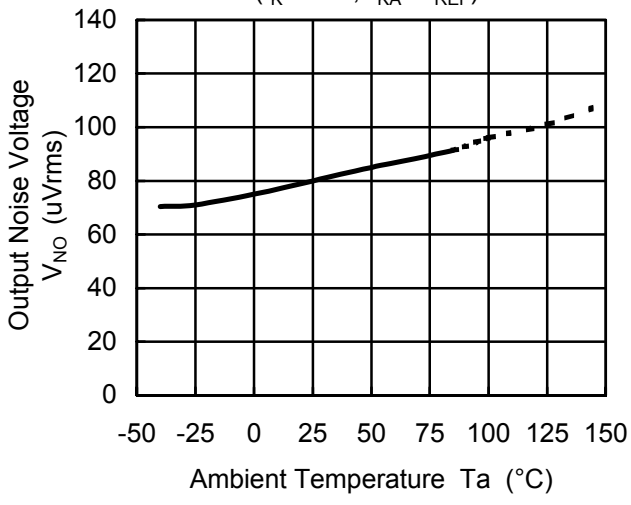

MEMO

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nisshinbo Micro Devices:

NJM2822F-TE1 NJM2821F-TE1