



### Discription

The D8V0L1B2LPQ-7B is designed to protect voltage sensitive components from damage or latch-up due to ESD. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed ESD for board level. Because of its small size and bi-directional design, it is ideal for use in cellular phones, MP3 players, and portable applications that require audio line protection.

### Features

- ★ IEC61000-4-2Level4ESDProtection
  - ±25kV Contact Discharge
  - ±25kV Air Discharge
- ★ 200W Peak pulse Power (8/20us)
- ★ Low clamping voltage
- ★ Workingvoltage:8V
- ★ Low leakage current
- ★ RoHS compliant
- ★ Protecting one bi-directional lines
- ★ Junction capacitance:10pF Typ.

### Applications

- ★ Cellular handsets and accessories
- ★ Battery Protection
- ★ Notebooks & Handhelds
- ★ Mobile Phones
- ★ MP3P layers
- ★ Peripherals

### Ordering Information

Product ID	Pack	Qty(PCS)
D8V0L1B2LPQ-7B	DFN1006-2L(X1-DFN1006-2)	10000



DFN1006-2L  
(X1-DFN1006-2)



Circuit Diagram



### Absolute Ratings( $T_{amb} = 25^{\circ}\text{C}$ )


Parameters	Symbol	Min	Max	Unit
Peak pulse power ( $t_p=8/20\mu\text{s}$ )@ $25^{\circ}\text{C}$	$P_{pk}$	-	200	W
ESD (IEC61000-4-2 air discharge) @ $25^{\circ}\text{C}$	$V_{ESD}$	-	$\pm 25$	kV
ESD (IEC61000-4-2 contact discharge) @ $25^{\circ}\text{C}$	$V_{ESD}$	-	$\pm 25$	kV
Junction temperature	$T_J$	-	150	$^{\circ}\text{C}$
Operating temperature	$T_{OP}$	-55	150	$^{\circ}\text{C}$
Storage temperature	$T_{STG}$	-55	150	$^{\circ}\text{C}$
Lead temperature	$T_L$	-	260	$^{\circ}\text{C}$

### Electrical Characteristics


Parameters	Symbol	Conditions	Min	Typ	Max	Units
Reverse Stand-off Voltage	$V_{RWM}$				8.0	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1\text{mA}$	9.0			V
Reverse Leakage Current	$I_R$	$V_{RWM}=8\text{V}$			1.0	$\mu\text{A}$
Clamping Voltage	$V_C$	$I_{PP}=1\text{A}; t_p=8/20\mu\text{s}$		13		V
Clamping Voltage	$V_C$	$I_{PP}=6\text{A}; t_p=8/20\mu\text{s}$		16		V
Junction Capacitance	$C_J$	$V_R=0\text{V}; f=1\text{MHz}$		10		pF




Symbol	Parameters
$V_{RWM}$	Peak Reverse Working Voltage
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$

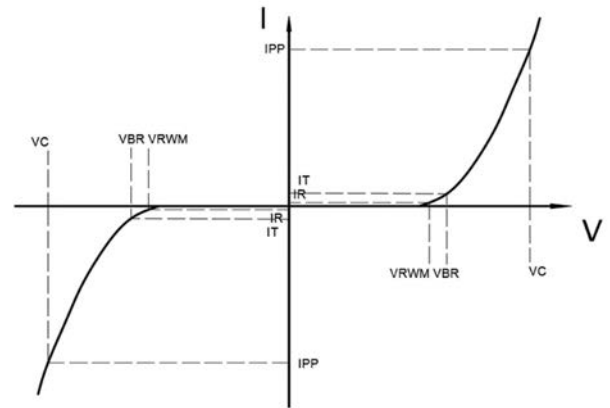

### Typical Characteristics

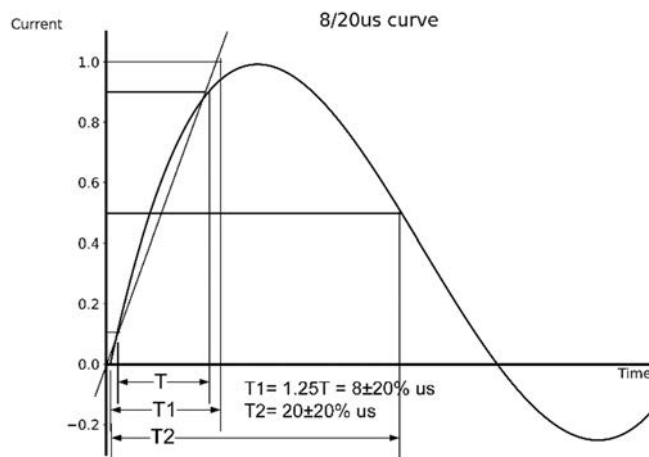


### Typical Application

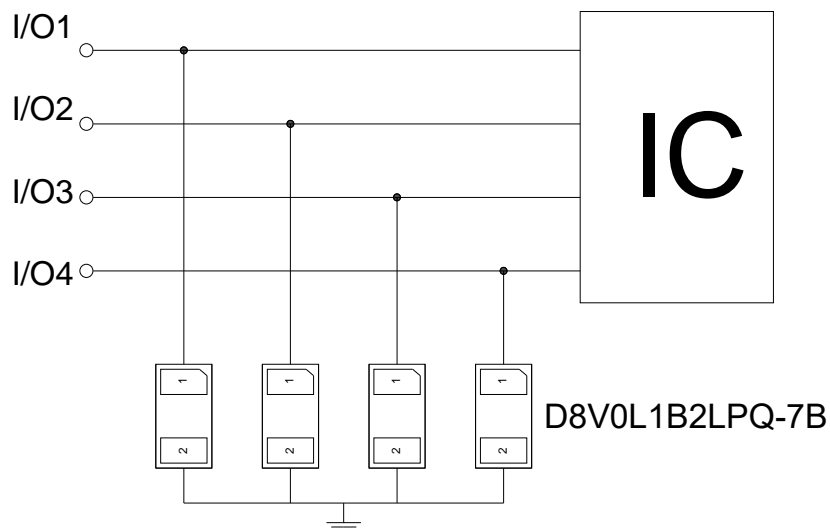




### Outline And Dimensions

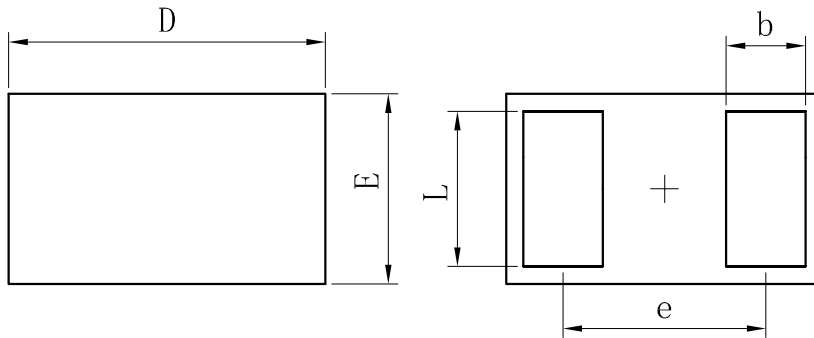

TOP VIEW


BOTTOM VIEW

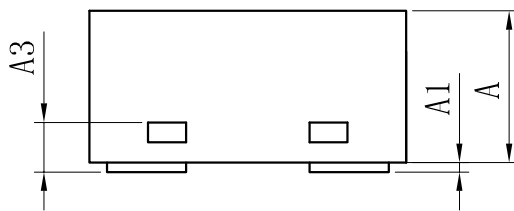

SIDE VIEW

DFN1006-2L(X1-DFN1006-2)			
Dim	Min	Typ	Max
D	0.95	1.00	1.05
E	0.55	0.60	0.65
e	-	0.64	-
L	0.44	0.49	0.54
b	0.20	0.25	0.30
A	0.43	0.48	0.53
A1	0	-	0.05
A3	0.127REF.		
All Dimensions in mm			

### Soldering Footprint

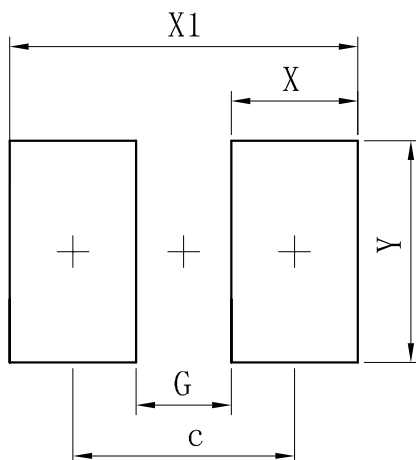

Dimensions	(mm)
c	0.70
G	0.30
X	0.40
X1	1.10
Y	0.70



### Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.