

10BASE-T NETWORK COMPONENTS


960051B

- Designed for use with Level One 10Base-T chipset LXT901 LXT907, LXT914 or Texas Instruments Quad PHY (TNETE 2004)
- 1:1 or 1:√2 turns ratio on transmit, 1:1 turns ratio on receive
- Single port components, available with and without common mode chokes
- Through-hole and surface mount packaging
- Models with additional differential filtering available
- 2000 Vrms isolation

ELECTRICALS AT 25°C


Part No.	Insertion Loss (dB) Max	OCL (μH) Min	Return Loss (dB) Min	Crosstalk (dB) Min	Attenuation (dB) Min			CM-CM Rej (dB) Min		Schematic	Package Style
	1-10MHz				25	30	40	10-30MHz	30-100MHz		
A553-0716-00	-1.0	140	-18	-40	N/A	N/A	N/A	N/A	N/A	A	1
A553-5999-64	-1.0	200	-18	-40	N/A	N/A	N/A	N/A	N/A	A	1
S553-0716-00	-1.0	140	-18	-40	N/A	N/A	N/A	N/A	N/A	A	2
S553-5999-08	-1.0	110	-15	-40	N/A	N/A	N/A	-40	-30	B	2
S556-5999-26	-1.0	110	-15	-40	-5	-10	-16	-40	-30	C	2
S556-5999-53	-1.0	110	-15	-40	-5	-10	-16	-40	-30	C	3

SCHEMATICS

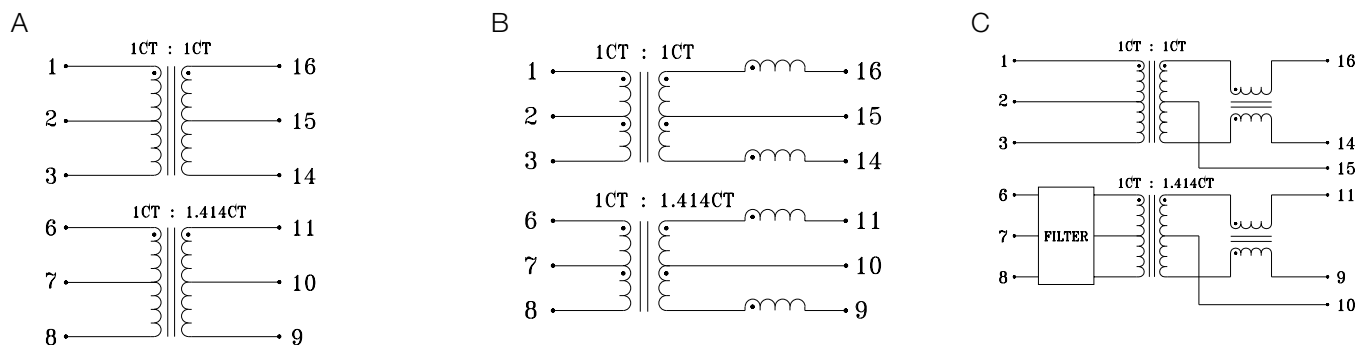

MECHANICALS


1

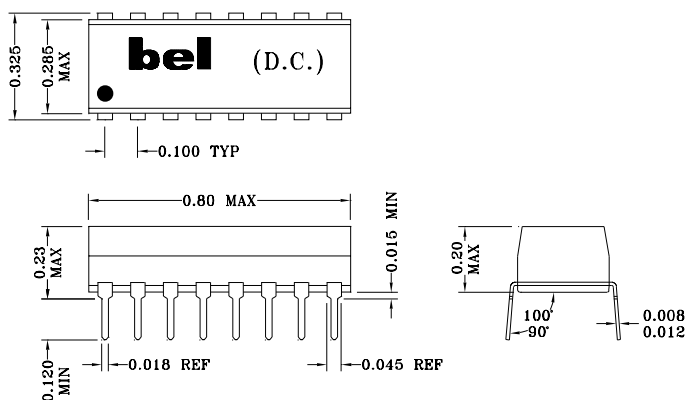


Specifications subject to change without notice.

MECHANICALS (CONT'D)




2

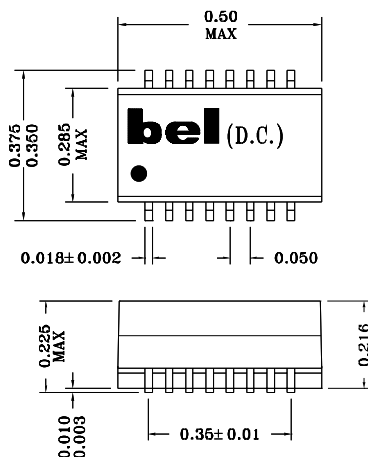

SUGGESTED PCB PAD LAYOUT

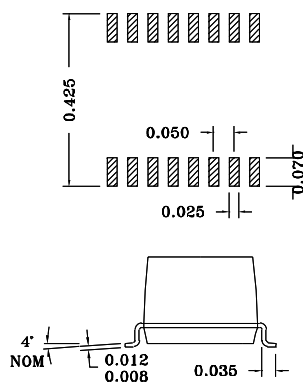


3

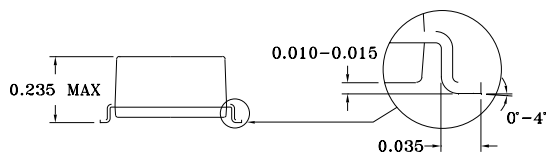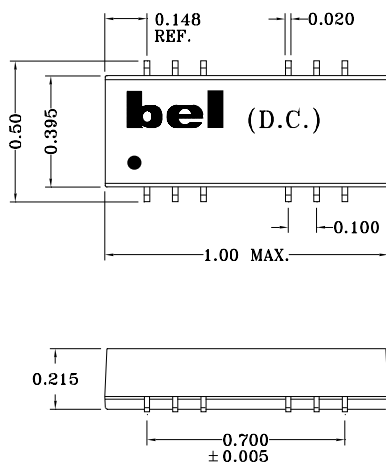

10BASE-T NETWORK COMPONENTS

APPLICATION CIRCUIT

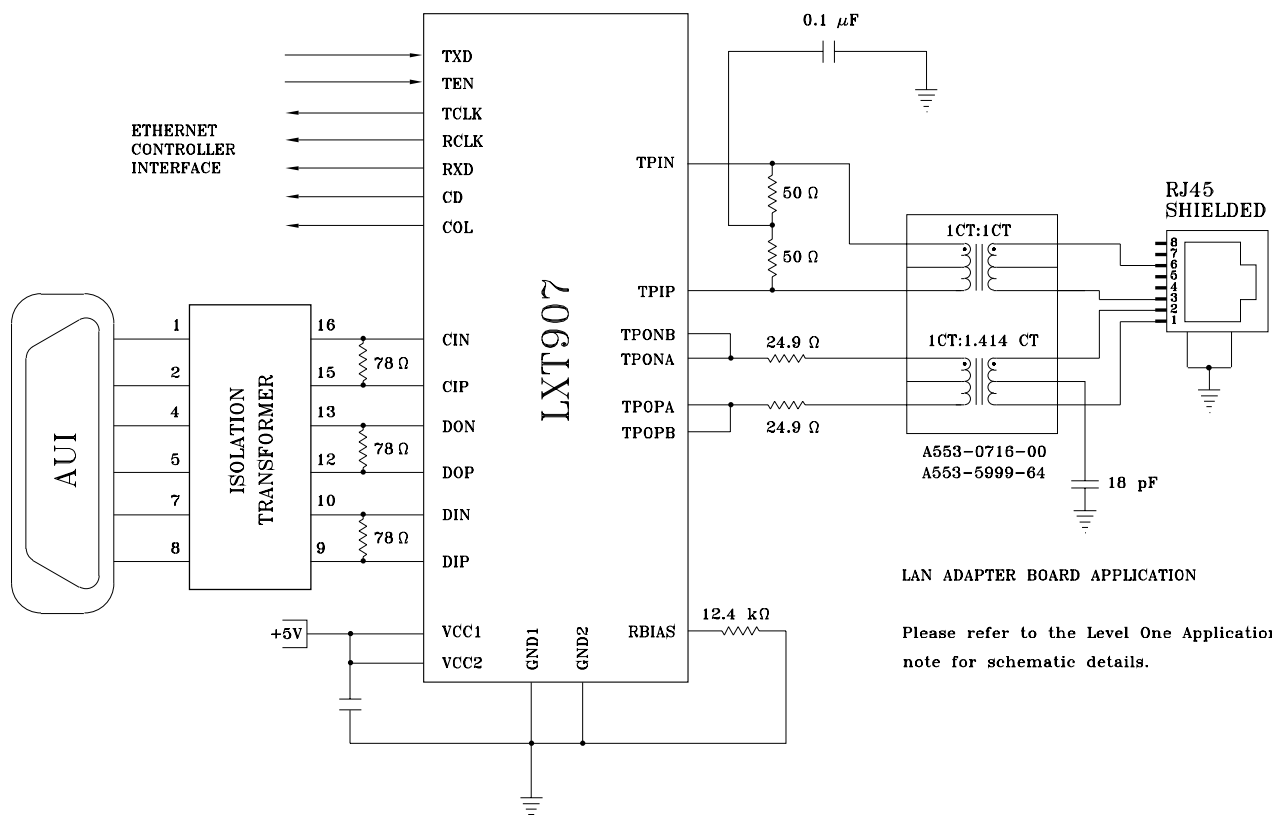

Specifications subject to change without notice.



defining a degree of excellence

10BASE-T NETWORK COMPONENTS

960051B

APPLICATION NOTES

- All designs meet IEEE 802.3 standards.
- Models with additional differential filtering are typically used in high density, multi-port applications or high noise content adapter cards.
- Bel's low profile, surface mount packaging is ideal for high speed pick and place machinery. Parts can be shipped on tape and reel for high speed placement. Construction processes have been implemented for thermal compatibility with high temperature IR reflow assembly processing. Post dipping of leads assist with PC board solderability. Each part is optically inspected to meet rigid coplanarity requirements.

Corporate Office

Bel Fuse Inc.

198 Van Vorst Street, Jersey City, NJ 07302-4496
Tel: 201-432-0463
Fax: 201-432-9542
E-Mail: BelFuse@belfuse.com
Internet: <http://www.belfuse.com>

Far East Office

Bel Fuse Ltd.

8F/8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel: 852-2328-5515
Fax: 852-2352-3706

European Office

Bel Fuse Europe Ltd.

Preston Technology Management Centre
Marsh Lane, Preston PR1 8UD
Lancashire, U.K.
Tel: 44-1772-556601
Fax: 44-1772-888366

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bel:

[S558-5999-J1-F](#) [S554-6500-25-F](#) [S558-5999-79-F](#) [S558-5999-U5-F](#) [S558-5999-90-F](#) [S553-6500-C8-F](#) [S553-6500-C4-F](#) [S553-6500-F6-F](#) [S553-6500-A5-F](#) [S558-5999-AF-F](#) [S558-5999-K6-F](#) [S553-6500-B9-F](#) [S558-5999-G9-F](#) [S558-5999-K9-F](#) [S553-6500-A6-F](#) [S553-6500-A7-F](#) [S558-5999-42-F](#) [S558-5500-16-F](#) [S558-5500-12-F](#) [S553-5999-86-F](#) [S553-5999-52-F](#) [S553-5999-08-F](#) [S553-0716-00-F](#) [S553-6500-89-F](#) [S553-5999-D6-F](#) [S558-5500-02-F](#) [S558-5999-03-F](#) [S558-5500-13-F](#) [S558-5999-Z3-F](#) [S555-6400-15-F](#) [S559-6204-22-F](#) [0553-0013-AC-F](#) [S560-6600-DJ-F](#) [S553-1445-00-F](#) [S555-5999-02-F](#) [S555-5999-15-F](#)