





圆形绝缘端子
PVC-Insulated Ring Terminal



型号 ITEM NO .	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm							包装 PCS/ PACK	颜色 COLOR	说明 EXPLANATION		
	American	Metric d2	B	F	L	E	D	d1	T					
RV1.25-3	#4	3.2	5.7	5.0	18.3	10.3	6.0	4.6	0.7	1000	红 Red	导线截面:0.5~1.5mm ² (美国线规22~16) 最大电流: I _{max} =19A 材质:紫铜 绝缘套管: PVC Lead Section: 0.5~1.5mm ² (A.W. G.22-16) Max Current:I _{max} =19A Material:Copper Insulation: PVC		
RV1.25-3.5S	#6	3.7												
RV1.25-3.5M	#6	3.7	6.6	6.3	20.0									
RV1.25-3.5L	#6	3.7	8.0	7.0	21.3									
RV1.25-4S	#8	4.3	6.6	6.3	20.0									
RV1.25-4L	#8	4.3	8.0	7.0	21.3									
RV1.25-5S	#10	5.3												
RV1.25-5L	#10	5.3	9.5	7.5	22.5									
RV1.25-5LL	#10	5.3	11.6	11.3	27.3									
RV1.25-6S	1/4	6.5	9.5	7.5	22.5									
RV1.25-6L	1/4	6.5	11.6	11.3	27.3									
RV1.25-8	5/16	8.5												
RV1.25-8L	5/16	8.5	13.7	13.9	31.2									
RV1.25-10	3/8	10.5												
RV1.25-10L	3/8	10.5	18.0	15.0	34.3									
RV1.25-12	1/2	13.0												
RV1.25-14	9/16	15.0	27.0	21.0	44.8					500				
RV1.25-16	5/8	17.0												
RV1.25-18	11/16	19.0												
RV1.25-20	3/4	21.0												

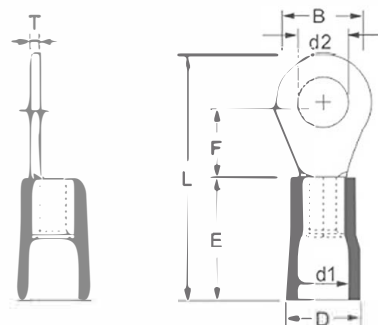


圆形绝缘端子
PVC-Insulated Ring Terminal

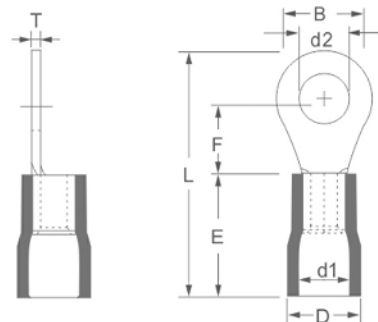

绝缘端子系列
Insulated Terminal
Series


型号 ITEM NO .	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm							包装 PCS/ PACK	颜色 COLOR	说明 EXPLANATION				
	American	Metric d2	B	F	L	E	D	d1	T							
RV2-3	#4	3.2	6.6	4.3	17.8	10.3	6.6	5.2	0.8	1000	蓝 Blue 导线截面:1.5~2.5mm² (美国线规16~14) 最大电流: I_{max}=27A 材质:紫铜 绝缘套管: PVC	Lead Section: 1.5~2.5mm ² (A.W. G.16-14) Max Current:I _{max} =27A Material:Copper Insulation: PVC				
RV2-3.5S	#6	3.7			19.8											
RV2-3.5M	#6	3.7		21.8												
RV2-3.5L	#6	3.7	8.5	7.4	21.8											
RV2-4S	#8	4.3	6.6	6.3	19.8											
RV2-4L	#8	4.3	8.5	7.4	21.8											
RV2-5S	#10	5.3														
RV2-5L	#10	5.3	9.5		22.3											
RV2-6S	1/4	6.5														
RV2-6L	1/4	6.5	12.0	11.0	26.8											
RV2-8	5/16	8.5														
RV2-8L	5/16	8.5	13.6	13.9	30.8											
RV2-10	3/8	10.5														
RV2-10L	3/8	10.5	18.2	15.0	34.6											
RV2-12	1/2	13.0														
RV2-14	9/16	15.0	27.0	21.0	44.6											500
RV2-16	5/8	17.0														
RV2-18	11/16	19.0														
RV2-20	3/4	21.0														

圆形绝缘端子 PVC-Insulated Ring Terminal

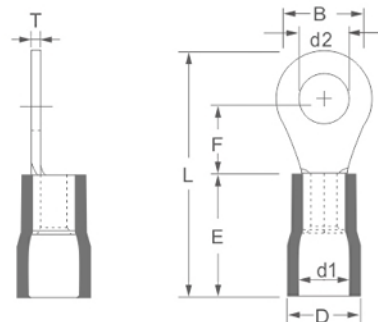

型号 ITEM NO .	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm							包装 PCS/ PACK	颜色 COLOR	说明 EXPLANATION				
	American	Metric d2	B	F	L	E	D	d1	T							
RV3.5-3	#4	3.2	8.0	8.0	25.0	13.0	7.8	6.4	1.0	500	● 黑 Black	导线截面:2.5~4mm ² (美国线规14~12) 最大电流: I _{max} =37A 材质:紫铜 绝缘套管: PVC Lead Section: 2.5~4mm ² (A.W. G.14-12) Max Current:I _{max} =37A Material:Copper Insulation: PVC				
RV3.5-3.5	#6	3.7														
RV3.5-4	#8	4.3														
RV3.5-4M	#8	4.3	9.5	8.3	27.0											
RV3.5-5S	#10	5.3	8.0	8.0	25.0											
RV3.5-5M	#10	5.3	9.5	8.3	27.0											
RV3.5-5L	#10	5.3	12.0	9.5	28.5											
RV3.5-6	1/4	6.5														
RV3.5-8	5/16	8.5	15.0	13.5	34.0											
RV3.5-10	3/8	10.5														
RV3.5-12	1/2	13.0	19.2	16.0	39.0											
RV5.5-3	#4	3.2	7.2	6.0	22.9	13.3	8.2	6.5	1.0	500	● 黄 Yellow	导线截面:4~6mm ² (美国线规12~10) 最大电流: I _{max} =48A 材质:紫铜 绝缘套管: PVC Lead Section: 4~6mm ² (A.W. G.12-10) Max Current:I _{max} =48A Material:Copper Insulation: PVC				
RV5.5-3.5	#6	3.7														
RV5.5-4S	#8	4.3														
RV5.5-4L	#8	4.3	9.5	8.2	26.2											
RV5.5-5	#10	5.3														
RV5.5-6	1/4	6.5	12.0	10.5	29.6											
RV5.5-6M	1/4	6.5		13.0	32.0											
RV5.5-8	5/16	8.5	15.0	13.5	34.0											
RV5.5-10	3/8	10.5														
RV5.5-12	1/2	13.0	19.2	16.0	39.2											
RV5.5-14	9/16	15.0	32.0	25.2	54.3								200			
RV5.5-16	5/8	17.0														
RV5.5-18	11/16	19.0														
RV5.5-20	3/4	21.0														


圆形绝缘端子
PVC-Insulated Ring Terminal

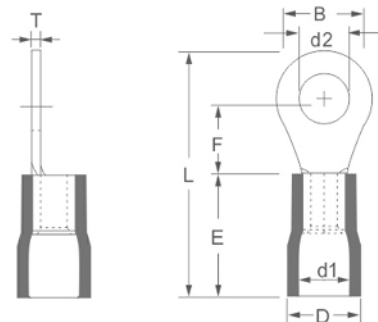

绝缘端子系列
Insulated Terminal Series

型号 ITEM NO .	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm							包装 PCS/ PACK	颜色 COLOR	说明 EXPLANATION
	American	Metric d2	B	F	L	E	D	d1	T			
RV8-4S	#8	4.3	8.8	10.5	30.6	15.5	10.2	8.3	1.2	500	● 红 Red	导线截面:6~10mm ² (美国线规8) 最大电流: I _{max} =62A 材质:紫铜 绝缘套管: PVC Lead Section: 6~10mm ² (A.W. G.8) Max Current:I _{max} =62A Material:Copper Insulation: PVC
RV8-4L	#8	4.3	12.0	9.3	31.0							
RV8-5S	#10	5.3	8.8	10.5	30.6							
RV8-6S	1/4	6.5	12.0	9.3	31.0							
RV8-8	5/16	8.5	15.0	13.8	36.8							
RV8-10	3/8	10.5										
RV8-12	1/2	13.0	20.0	15.0	40.2							
RV8-14	9/16	15.0	31.7	25.5	56.8							
RV8-16	5/8	17.0										
RV8-18	11/16	19.0										
RV8-20	3/4	21.0										
RV14-4	#8	4.3	12.0	13.3	40.5	21.5	12.0	10.5	1.5	200	● 蓝 Blue	导线截面:10~16mm ² (美国线规6) 最大电流: I _{max} =88A 材质:紫铜 绝缘套管: PVC Lead Section: 10~16mm ² (A.W. G.6) Max Current:I _{max} =88A Material:Copper Insulation: PVC
RV14-5SS	#10	5.3	12.1	11.5	38.0							
RV14-5S	#10	5.3	12.0	13.3	40.5							
RV14-5L	#10	5.3	16.0	14.2	43.5							
RV14-6SS	1/4	6.5	12.1	11.5	38.0							
RV14-6S	1/4	6.5	12.0	13.3	40.5							
RV14-6L	1/4	6.5	16.0	14.2	43.5							
RV14-8	5/16	8.5										
RV14-10	3/8	10.5										
RV14-12	1/2	13.0										
RV14-14	9/16	15.0	31.7	25.5	62.0							
RV14-16	5/8	17.0										
RV14-18	11/16	19.0										
RV14-20	3/4	21.0										

圆形绝缘端子 PVC-Insulated Ring Terminal

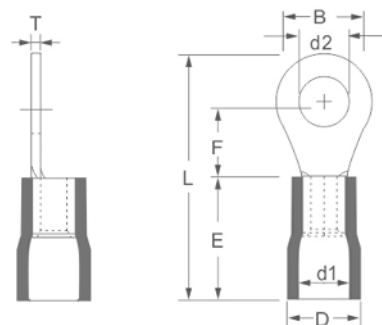

型号 ITEM NO .	STUD SIZE 美制螺栓号 螺栓口直径		尺寸 DIMENSION mm							包装 PCS/ PACK	颜色 COLOR	说明 EXPLANATION			
	American	Metric d2	B	F	L	E	D	d1	T						
RV22-4S	#8	4.3	12.1	14.5	44.2	23.5	15.8	13.3	1.8	200	 黄 Yellow	导线截面:16~25mm ² (美国线规4) 最大电流: I _{max} =115A 材质:紫铜 绝缘套管: PVC Lead Section: 16~25mm ² (A.W. G.4) Max Current:I _{max} =115A Material:Copper Insulation: PVC			
RV22-5S	#10	5.3													
RV22-5L	#10	5.3													
RV22-6S	1/4	6.5	12.1	14.5	44.2								31.7	24.5	63.0
RV22-6L	1/4	6.5													
RV22-8	5/16	8.5													
RV22-10	3/8	10.5													
RV22-12	1/2	13.0	22.0	19.7	53.8										
RV22-14	9/16	15.0	31.7	24.5	63.0										
RV22-16	5/8	17.0													
RV22-18	11/16	19.0													
RV22-20	3/4	21.0													
RV38-5	#10	5.3	15.3	17.4	53.0	28.0	18.8	13.5	1.8	100	 红 Red	导线截面:30~50mm ² (美国线规2) 最大电流: I _{max} =160A 材质:紫铜 绝缘套管: PVC Lead Section: 30~50mm ² (A.W. G.2) Max Current:I _{max} =160A Material:Copper Insulation: PVC			
RV38-6S	1/4	6.5													
RV38-6L	1/4	6.5	22.0	17.7	56.5								22.0	17.7	56.5
RV38-8S	5/16	8.5	15.3	17.4	53.0										
RV38-8L	5/16	8.5	22.0	17.7	56.5										
RV38-10S	3/8	10.5	15.3	17.4	53.0										
RV38-10L	3/8	10.5													
RV38-11	7/16	11.5													
RV38-12	1/2	13.0													
RV38-14	9/16	15.0	31.7	23.5	66.0										
RV38-16	5/8	17.0													
RV38-18	11/16	19.0													
RV38-20	3/4	21.0													