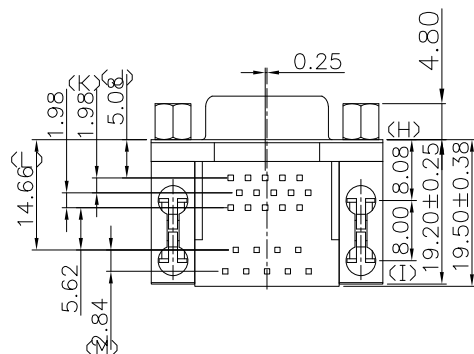
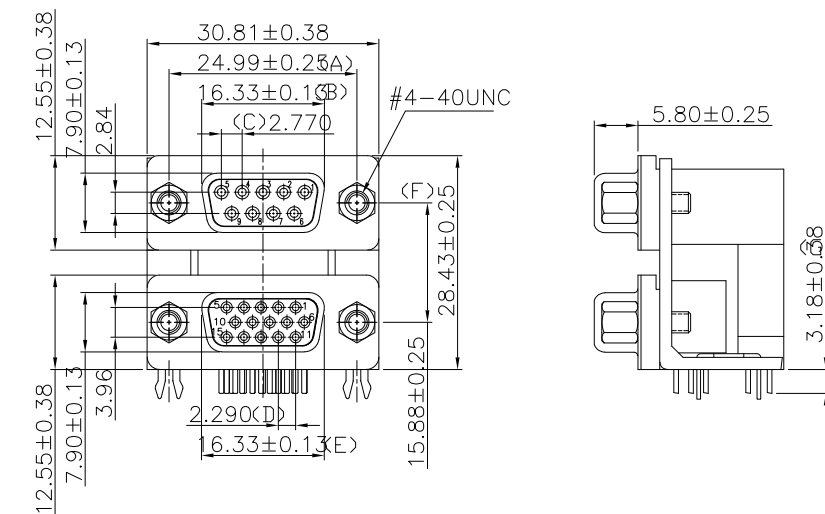


RECOMMENDED P. C. B LAYOUT

INSPECTION DIMENSION: (A) ~ (M)

NOTES

- MATERIAL:
Housing(UPPER):PBT, UL 94V-0, Color:Black
Housing(LOWER):PBT, UL 94V-0, Color:Black
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Bracket:Zinc Alloy.
Screw:Copper Alloy.
- FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Area.

Shell:Nickel Plated.
Boardlock:Tin Plated.
Bracket:Nickel Plated.
Screw:Nickel Plated.

- This Product is LEAD-FREE & RoHS Compliance Product.

SPECIFICATIONS

- D-SUB
 - Voltage: 250 VAC(RMS) Max.
 - Current Rating: 3 Ampere per Contact
 - Contact Resistance: 25 Milliohms Max.
 - Insulation Resistance: 5000 Megohms Min.
 - Dielectric Withstanding Voltage: 1000 VAC(RMS)
 - Total Mating Force: 4.0 Kgf Max.
 - Total Unmating Force: 1.0 Kgf Min.
 - Operating Temperature: -55°C to +85°C
- VGA
 - Voltage: 250 VAC(RMS) Max.
 - Current Rating: 3 Ampere per Contact
 - Contact Resistance: 25 Milliohms Max.
 - Insulation Resistance: 5000 Megohms Min.
 - Dielectric Withstanding Voltage: 1000 VAC(RMS)
 - Total Mating Force: 6.0 Kgf Max.
 - Total Unmating Force: 1.2 Kgf Min.
 - Operating Temperature: -55°C to +85°C



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DR9母 对 HDR15母 铆锁间距15.88	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCW103-VGA24B-158B	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: HYC-1910140940	
			SHEET NO.	1 OF 1