



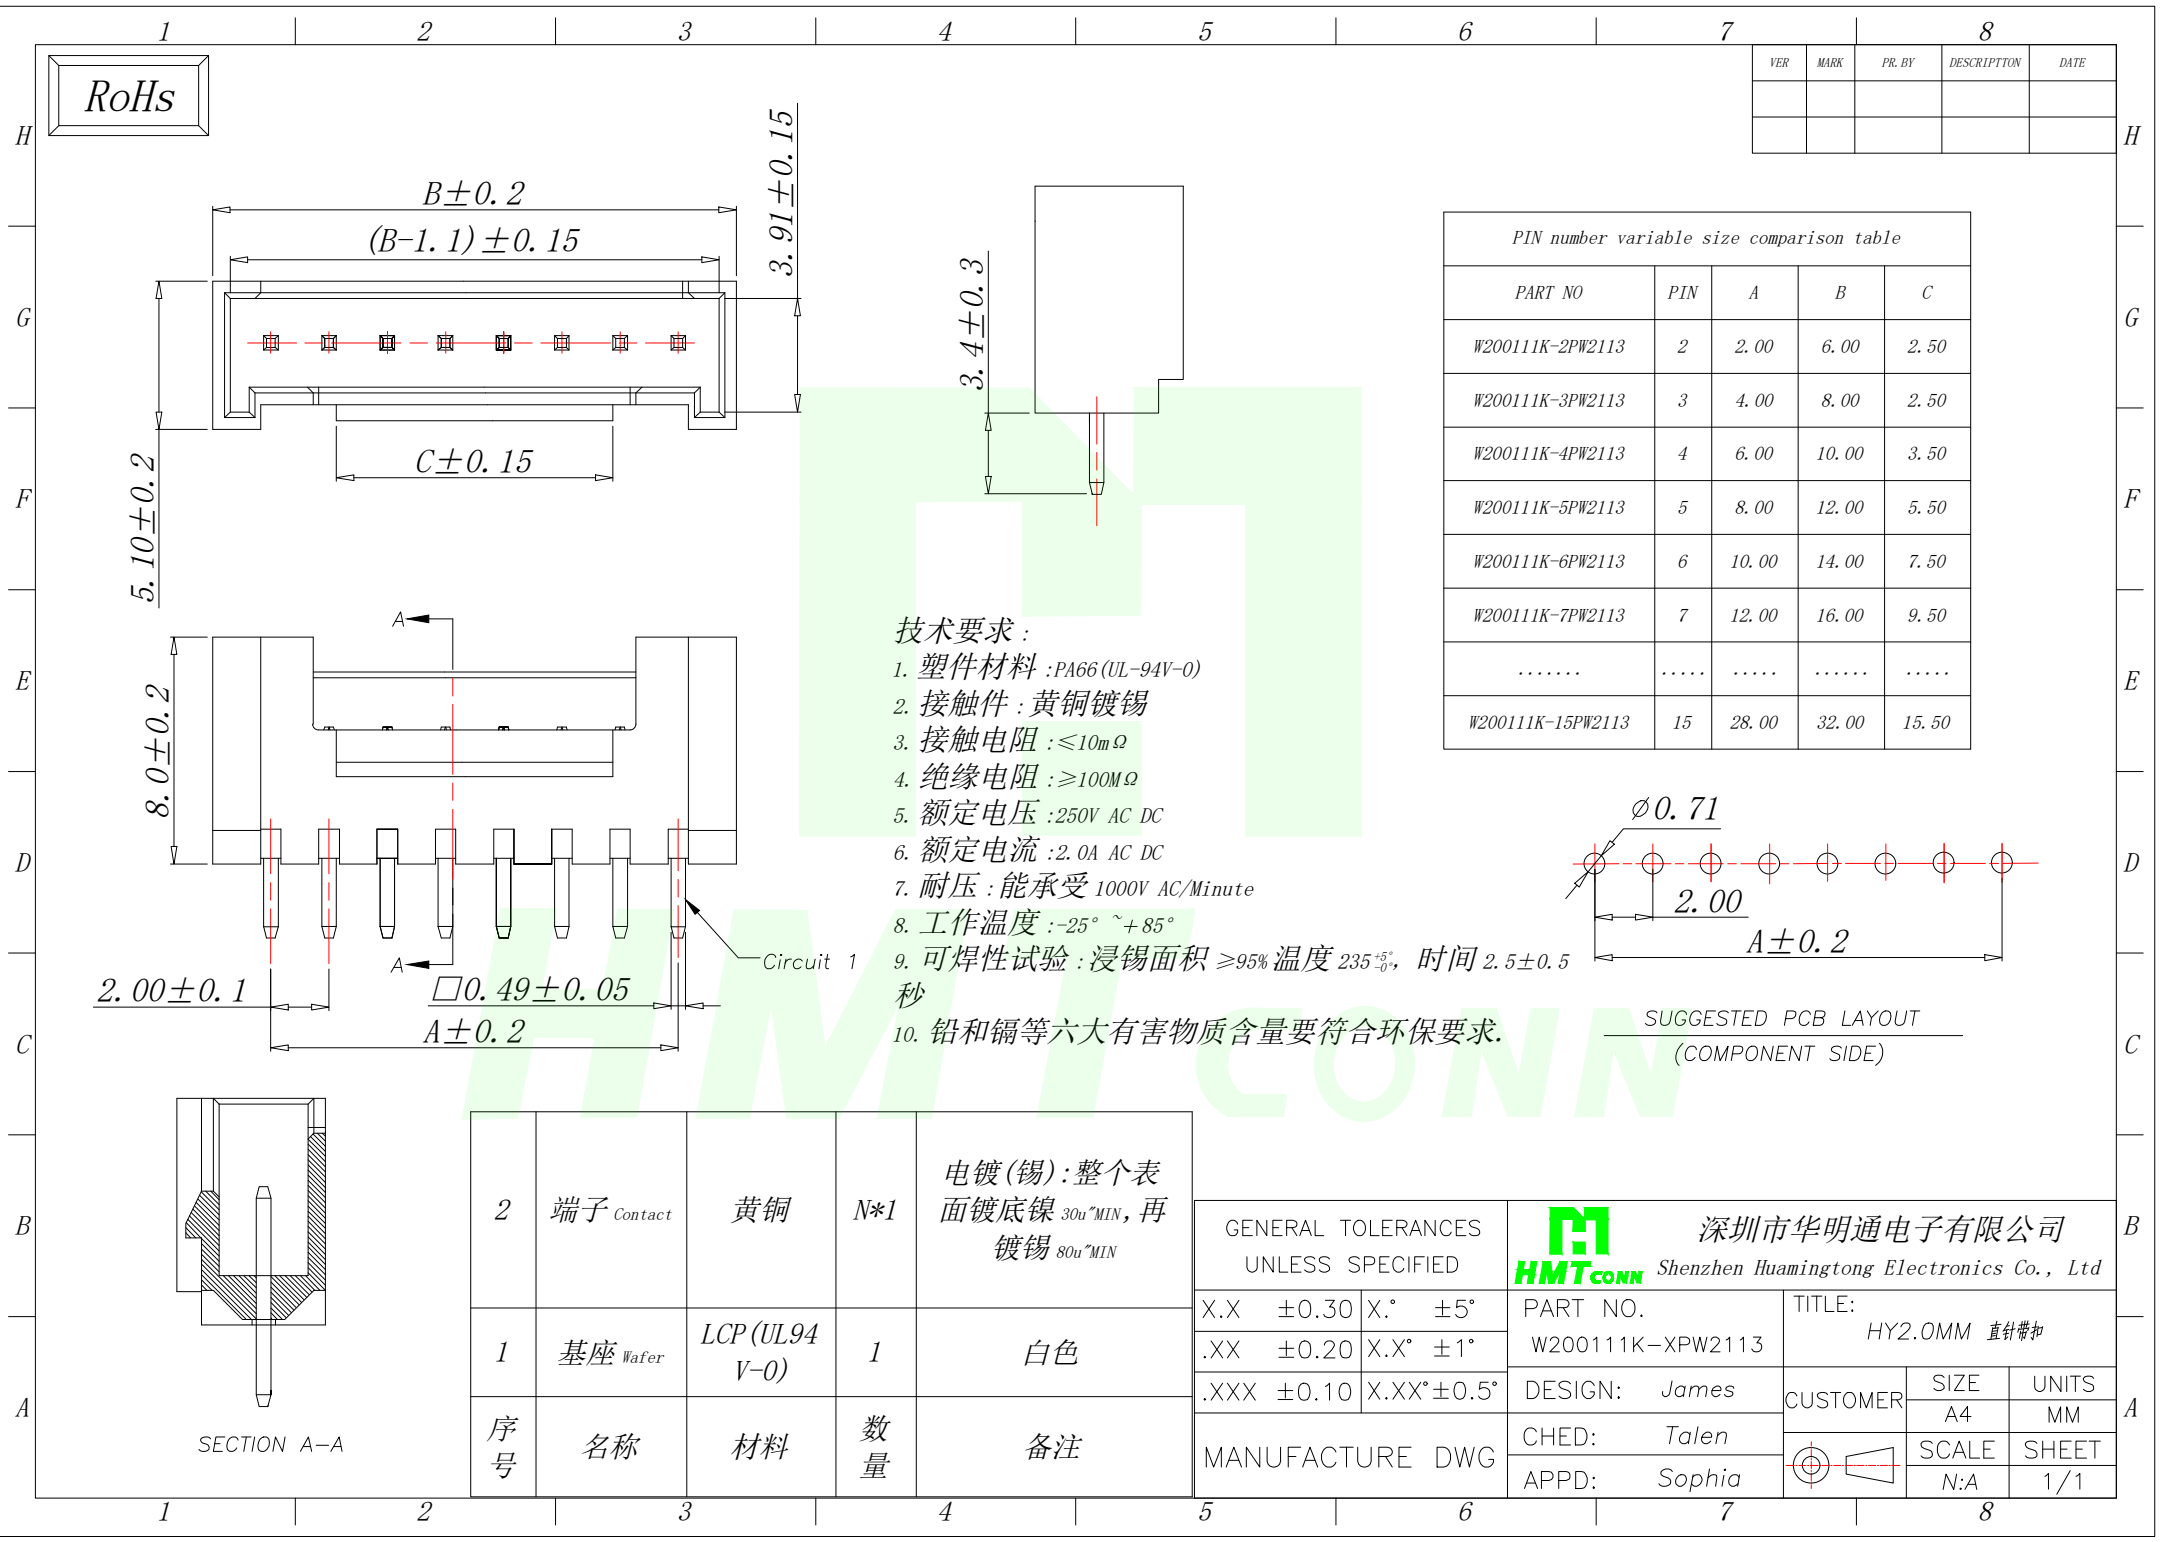

- 技术要求:
- 1. 塑件材料 :PA66 (UL-94V-0)
 - 2. 接触件 :黄铜镀锡
 - 3. 接触电阻 : $\leq 10m\Omega$
 - 4. 绝缘电阻 : $\geq 100M\Omega$
 - 5. 额定电压 :250V AC DC
 - 6. 额定电流 :2.0A AC DC
 - 7. 耐压 :能承受 1000V AC/Minute
 - 8. 工作温度 : $-25^{\circ} \sim +85^{\circ}$
 - 9. 可焊性试验 :浸锡面积 $\geq 95\%$ 温度 235^{+5}_{-0} , 时间 2.5 ± 0.5 秒
 - 10. 铅和镉等六大有害物质含量要符合环保要求.

PIN number variable size comparison table				
PART NO	PIN	A	B	C
W200111K-2PW2113	2	2.00	6.00	2.50
W200111K-3PW2113	3	4.00	8.00	2.50
W200111K-4PW2113	4	6.00	10.00	3.50
W200111K-5PW2113	5	8.00	12.00	5.50
W200111K-6PW2113	6	10.00	14.00	7.50
W200111K-7PW2113	7	12.00	16.00	9.50
.....				
W200111K-15PW2113	15	28.00	32.00	15.50

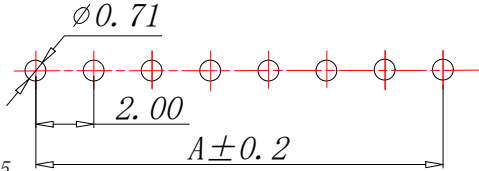

2	端子 Contact	黄铜	N*1	电镀(锡):整个表面镀底镍 30u~MIN, 再镀锡 80u~MIN
1	基座 Wafer	LCP (UL94 V-0)	1	白色
序号	名称	材料	数量	备注

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd	
X.X ±0.30	X.° ±5°	PART NO.	TITLE:
.XX ±0.20	X.X° ±1°	W200111K-XPW2113	HY2.0MM 直针带扣
.XXX ±0.10	X.XX° ±0.5°	DESIGN: James	CUSTOMER
MANUFACTURE DWG		CHED: Talen	SIZE A4
		APPD: Sophia	UNITS MM
			SCALE SHEET
			N:A 1/1