
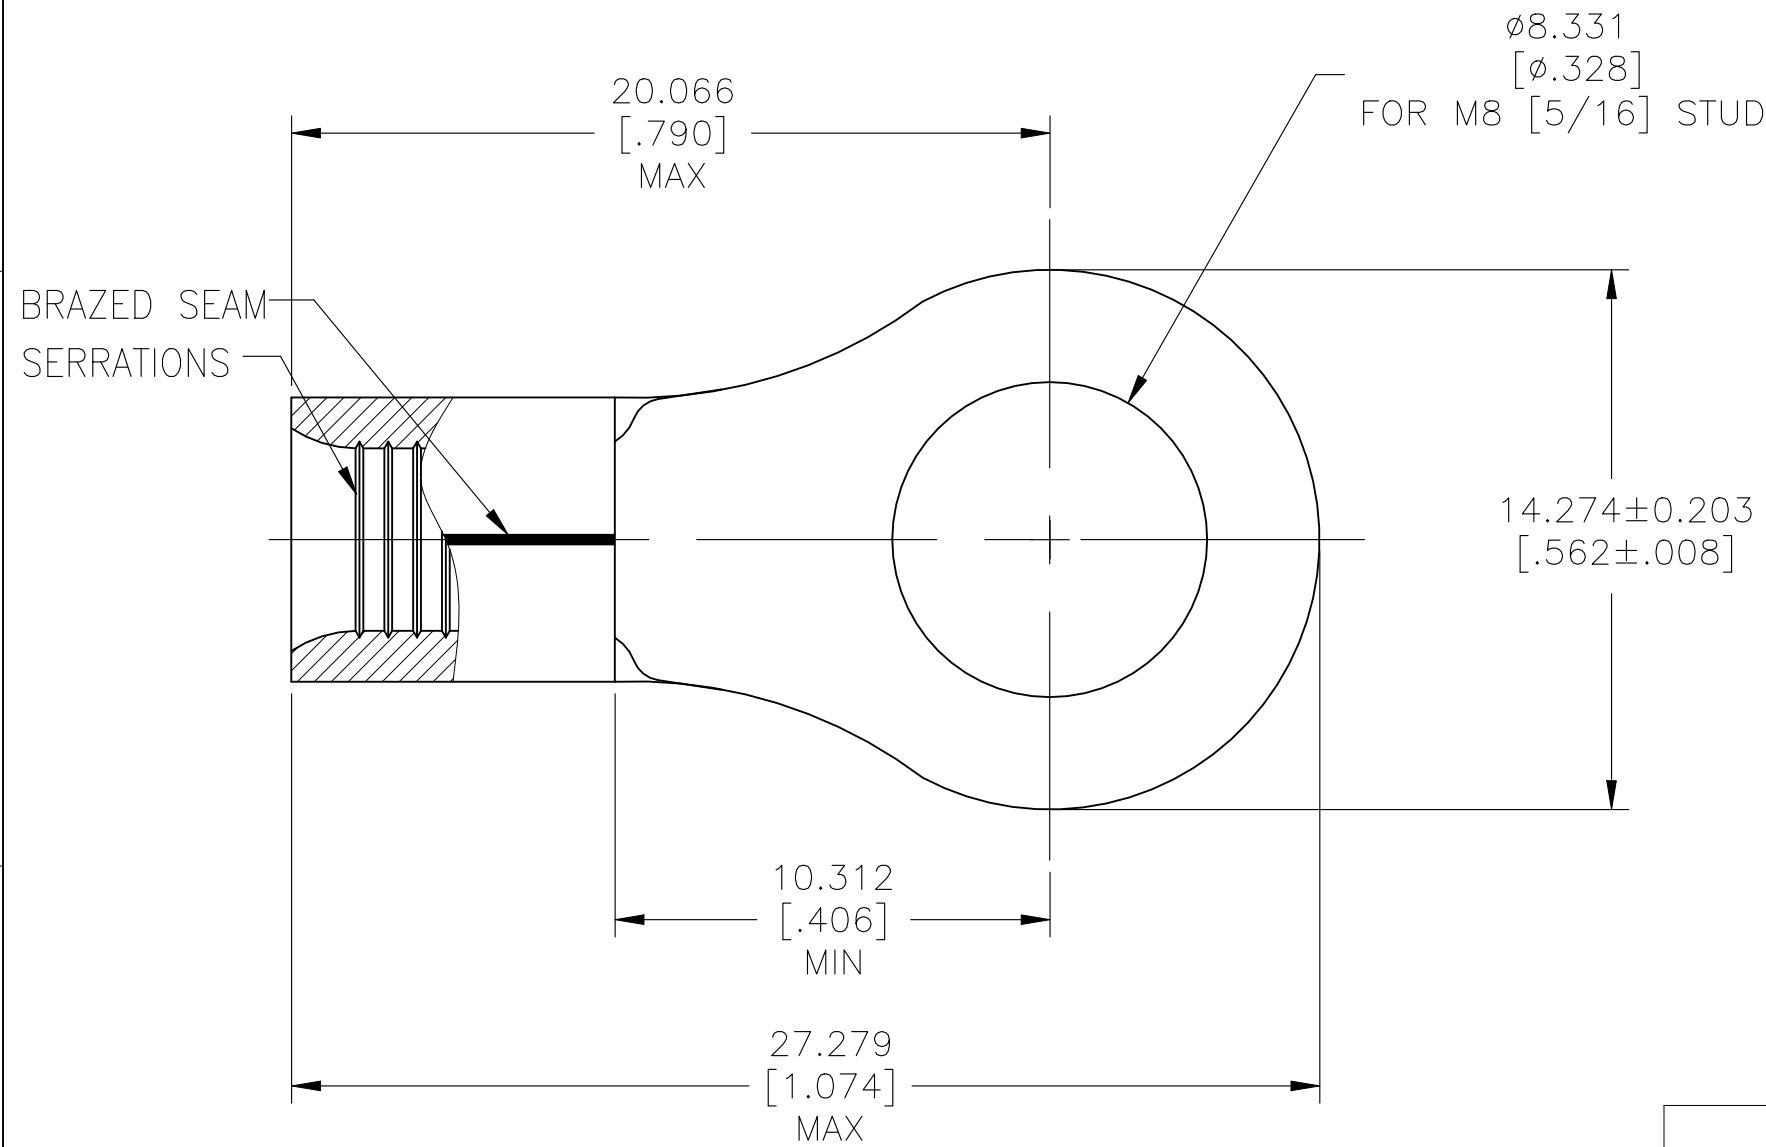


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECO-19-009164	24JUN2020	KG	DR



- 1 WIRE RANGE IS FOR 8 AWG. STANDARD WIRE CROSS SECTIONAL AREA RANGE: 20,800-33,100 CMA, STRANDED WIRE
 - 2 TERMINAL BODY MATERIAL THK IS 1.219±0.076[.048±.003]
 - 3 RECOMMENDED OPERATING TEMP -55°C [131°F] TO +200°C [392°F] FOR HEAT SHRINK TUBING
 - 4 HEAT SHRINK TUBING SHELF LIFE OF 18 MONTHS FROM DATE CODE ON LABEL
- 5 TERMINAL BODY PRODUCT SPECIFICATION 108-32046 APPLICATION SPECIFICATION 114-2162

1	8-1190141-0	HIGH AND LOW TEMPERATURE CROSS LINKED FLUOROPOLYMER HEAT SHRINK TUBING 9.53 [.375]MIN ID X 25.400±2.032 [1.000±.080] RT555-3/8-0-SP
1	323167	TERMINAL BODY: COPPER PER ASTM B152 ANNEALED FINISH: NICKEL PLATE 0.00762[.000300] MIN EXT THK PER SAE AMS QQ-N-290
-1	PART NO	DESCRIPTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 08DEC09	TE Connectivity						
		CHK TOM MICHIELUTTI 08DEC09							
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD TOM MICHIELUTTI 08DEC09	NAME —						
	0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± 0.127[.005] 4 PLC ± — ANGLES ± 1°	PRODUCT SPEC — 	HEAT RESISTANT TERMINAL KIT WIRE SIZE: 8 AWG						
		APPLICATION SPEC — 							
		WEIGHT —	SIZE A3	CAGE CODE 00779	DRAWING NO C-696635		RESTRICTED TO —		
MATERIAL SEE TABLE		FINISH SEE TABLE	CUSTOMER DRAWING				SCALE 5:1	SHEET 1 OF 1	REV B