

Features

- rugged welded case, hermetic
- other standard and custom PLP models available with wide selection of fco

Applications

- test equipment
- lab use
- transmitters/receivers
- military/hi-rel applications

HT-PLP-70+



50Ω DC to 60 MHz


Low Pass Filter Electrical Specifications (T_{AMB}= 25°C)

PASSBAND (MHz)	fco (MHz) Nom.	STOPBAND (MHz)		VSWR (:1)	
		(Loss>20dB)	(Loss>40dB)	Passband Typ.	Stopband Typ.
(loss < 1 dB)	(loss 3 dB)				
DC-60	67	90-117	117-300	1.7	18


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	0.5W max.
Permanent damage may occur if any of these limits are exceeded.	

electrical schematic




typical frequency response



Pad Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7
CASE GROUND	2,3,4,5,6,7

Outline Drawing

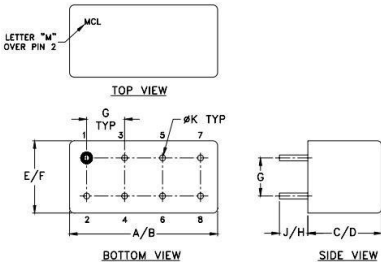

Outline Dimensions: Unit (mm)

A	19.56	B	20.32	C	9.78
D	10.16	E	9.40	F	10.16
G	5.08	H	5.08	J	3.56
K	0.79	wt		5.2	

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	X	σ			
1.00	0.02	0.1	41.6	1.00	12.18
12.00	0.09	0.1	35.7	12.00	12.27
23.00	0.14	0.1	25.9	23.00	12.70
34.00	0.30	0.1	17.1	34.00	13.24
45.50	0.38	0.1	15.3	45.50	14.84
56.50	0.48	0.1	18.3	56.50	17.75
60.00	0.57	0.1	17.8	60.00	19.13
64.00	0.81	0.1	13.9	62.00	20.78
67.00	1.27	0.2	9.8	64.00	22.11
70.00	2.40	0.5	5.9	66.00	24.56
75.00	6.44	0.7	1.9	67.00	25.58
82.00	14.32	0.6	0.3	70.00	27.33
85.00	17.61	0.6	0.1	72.00	27.29
88.00	20.73	0.5	0.1	75.00	23.25
90.00	22.72	0.5	0.1	80.00	16.05
92.00	24.63	0.4	0.1	82.00	13.76
100.00	31.63	0.3	0.2	85.00	10.85
105.00	35.63	0.3	0.2	88.00	9.20
110.00	39.22	0.3	0.3	90.00	8.00
115.00	42.79	0.3	0.3	92.00	7.14
117.00	44.09	0.3	0.3	95.00	7.25
167.00	71.03	2.8	0.3	100.00	4.98
189.50	71.25	4.9	0.3	102.00	2.55
211.50	78.21	8.2	0.2	105.00	5.78
233.50	79.29	6.9	0.2	110.00	3.41
255.50	79.68	7.6	0.2	115.00	1.56
267.00	78.34	9.9	0.2	117.0	7.50
278.00	76.60	3.1	0.1	167.00	7.04
289.00	75.01	2.8	0.1	178.00	6.83
300.00	74.09	4.1	0.1	189.50	6.54

