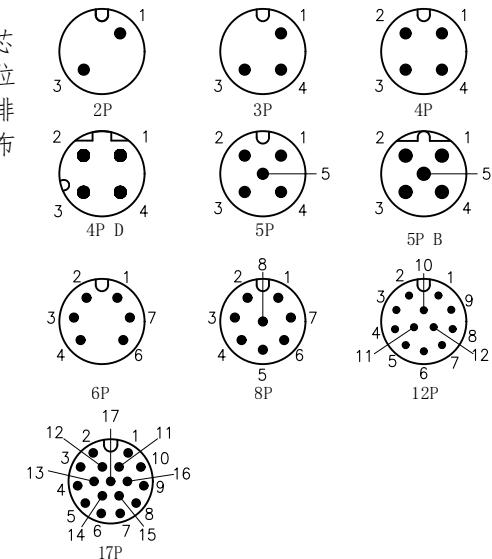
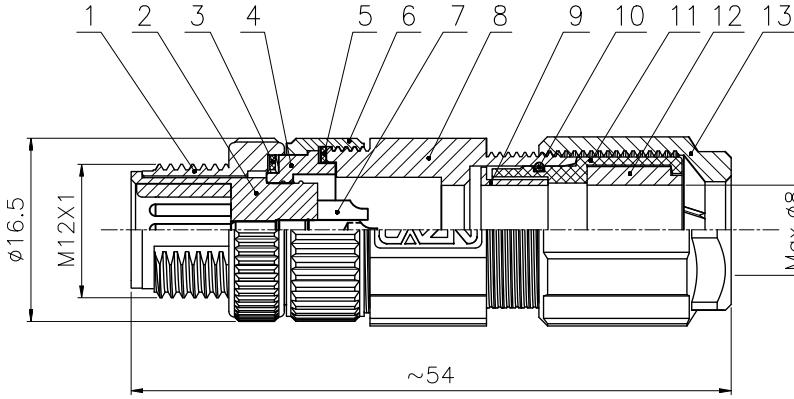



1		2		3				4		5		6							
No.	Specification				Unit	Q'ty	No.	Specification				Unit	Q'ty						
A	1 M12螺纹式螺母螺钉,公头大体积阻尼锌合金外壳				pc	1	9	M12屏蔽管铜外壳,X型组装式				pc	1						
	2 M12 针型胶芯短体 黑色				pc	1	10	硅橡胶Φ11*Φ9.4*0.8黑色				pc	1						
	3 波形垫片不锈钢Φ13.35*Φ10.35-H0.2,银白色				pc	1	11	M12螺纹式,X型组装式锁线尾夹塑胶外壳				pc	1						
	4 M12,金属组装式连接套铜外壳				pc	1	12	硅橡胶Φ11.5*Φ8-8.6黑色 M12 X型组装式防水胶塞				pc	1						
	5 M12 X型组装式带点波形垫片				pc	1	13	M12螺纹式尾部锁线螺母,X型组装式锌合金外壳				pc	1						
	6 M12螺纹式,金属组装式主体螺母				pc	1													
	7 焊线式公针直针镀金				pc	2~17													
	8 M12螺纹式主体,X型组装式(正成logo) 锌合金外壳				pc	1													
B									B										
C									C										
D	芯数	2	3	4	4D	5	5B	6	8	12	17	GENERAL TOLERANCE (UNLESS SPECIFIED)							
额定电压	250V	250V	250V	250V	60V	60V	30V	30V	30V	30V	30V	≤10 ±0.1	绘图 DWN						
额定电流	4A	4A	4A	4A	4A	4A	2A	2A	1.5A	1.5A	1.5A	<10~<20 ±0.2	C. Z. H 2024.11.06						
额定脉冲电压	2500V	2500V	2500V	2500V	1500V	1500V	800V	800V	800V	800V	800V	<20~<50 ±0.5	确认 CHK						
绝缘电阻(MΩ)	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	Angle ±1°	核准 APVD						
接触电阻(mΩ)	≤ 5	≤ 5	≤ 5	≤ 5	≤ 5	≤ 5	≤ 5	≤ 5	≤ 5	≤ 5	≤ 5	视 角 THIRD ANGLE	单位 UNIT	MM	版本 REV	A	品号 PART NO	品名 TITLE	
												尺寸 SIZE	A4	页码 SHEET	1 OF 1	型号 DRAWING NO	M12-Pxx-GWAP9		

**CAZN® 正成**