

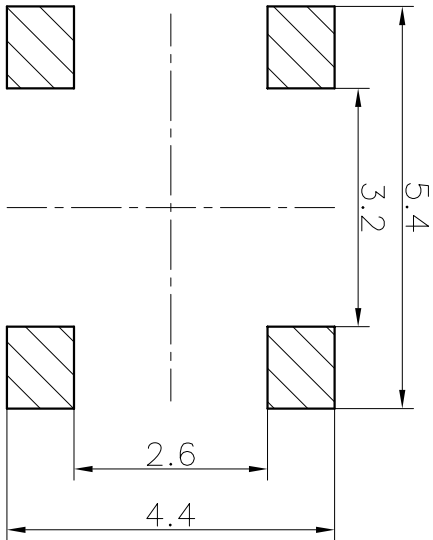
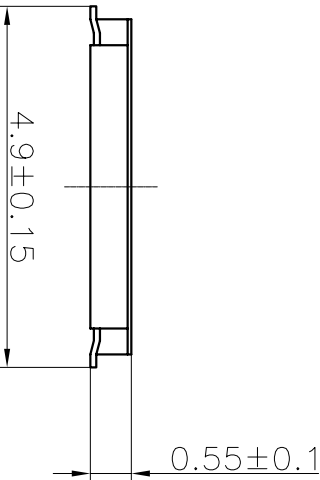


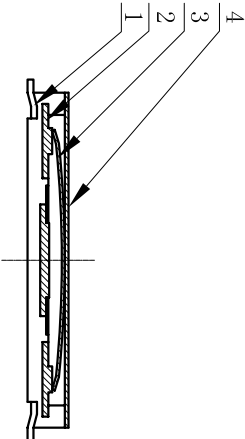

规格 Specifications			
额定负荷 Rating	DC 12V/50mA		
接触电阻Contact Resistance	100mΩ max.		
绝缘电阻Insulation resistance	DC100V 60S 100MΩ min.		
抗电强度Dielectric strength	AC250V(50~60HZ) 60S min.		
操作力Operation force	250±50gf		
寿命试验Operating Life	100,000cycles		
行程Travels	0.15±0.1mm		

RECOMMENDED P.C.B. LAYOUT

安装尺寸图



CIRCUIT DIAGRAM
回路图

PRODUCT NO. : 1TS019B*****A1 - **

轻触开关

4. 5X4. 5系列

外形:

A=平脚

B=弯脚

按点颜色:
底座颜色:
贴膜颜色:

操作力度:

160=160gf

250=250gf

初始颜色

290=290gf
则不启用

手感:

0=常规(弹片)

1=大手感(弹片)

2=小手感(弹片)

3=特殊手感(弹片)

产品高度(H):

040=0. 40mm

055=0. 55mm

其它:
CT=编带(非编带, 不启用)

材质:

0=初始材质

1=新增材质

依次增加

4	FILM	1	PI	YELLOW
3	DOVE	1	STAINLESS STEEL	Ag-PLATED
2	HOUSING	1	LCP	GREY
1	TERMINAL	1	PHOSPHOR BRONZE	Ag-PLATED
ITEM	PART NAME	QUANTITY	MATERIAL	FINISH
X. ± 0.2	X' ± 3'	UNITS	NAME(INTENDED USE)	HON YUAN HON YUAN PRECISION IND. CO.,LTD. SHENZHEN, CHINA.
X ± 0.1	X' ± 2'	MAT'L	4.5X4.5 TACT SWITCH	
.XX ± 0.05	.XX' ± 1'	FINISH	PART NO.(INTENDED USE)	
.XXX ± 0.03	.XXX' ± 0.5'		1TS019B-2500-0550A1	PRODUCT DRAWING
APPD:	ZO 2020-5-11	DWG NO.:	1TS019B-2500-0550A1-CT	
CHKD:	M.H.LI 2020-5-11	DR:	y.y.Chen 2020-5-11	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON YUAN PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON YUAN PRECISION IND. CO., LTD.				
SCALE		SHEET	REV.	A
10/1		1/1	A	