



4

5

乙

1

D

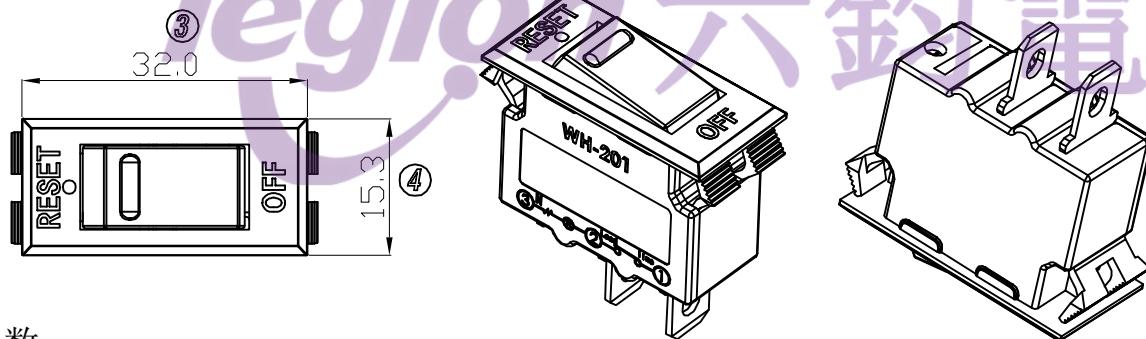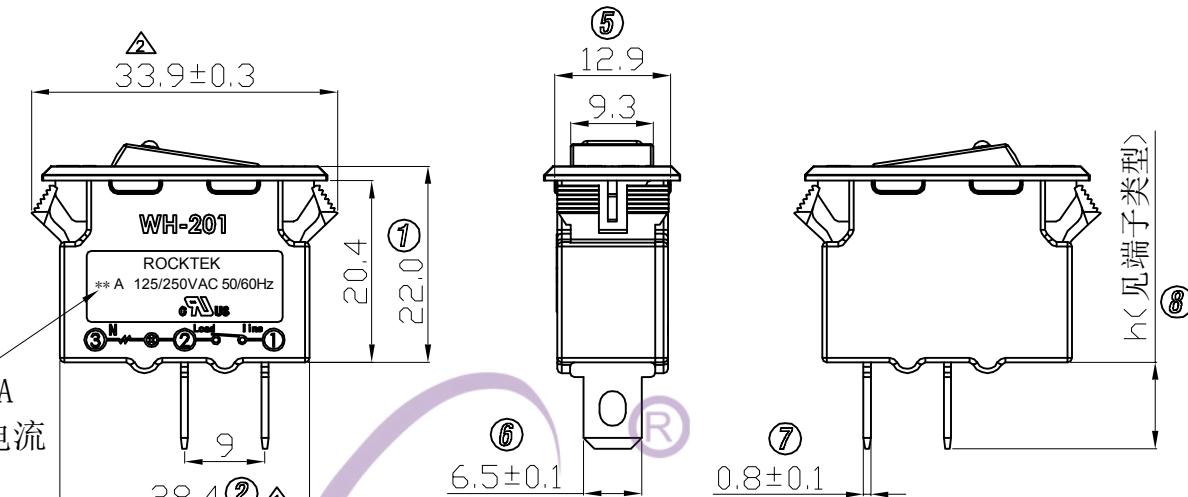


品名	基座颜色	上盖颜色	端子类型
WH-201-**BR01W2-R	黑色	暗红色	中长脚
WH-201-**BR01W3-R	黑色	暗红色	长脚
WH-201-**BB01W3-R	黑色	黑色	长脚
WH-201-**WB01B3-R	白色	黑色	长脚


WH-001-*****-R

额定电流: 03~16A 端子类型

端子类型 (参考)

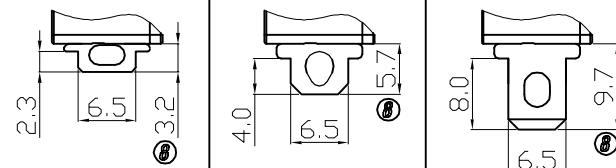

开孔尺寸参考



THICKNESS	DIMENSION A
0.8~1.0	29.0 ^{+0.1} ₀
1.1~1.4	29.5 ^{+0.1} ₀
1.5~2.5	30.0 ^{+0.1} ₀

技术参数:

- 额定电器性能: 3~16A 125/250VAC (UL;CUL) ;
- 动作时间标准: 环境温度25℃电流200% (6~32A) 时3到60秒内断开;
- 耐压: 1500VAC/0.5mA/1min无闪烙、无击穿;
- 机械寿命: ≥10000次;
- 耐焊时间: ≤3秒焊接温度350±10℃。

电话 : 0769-82310511-867
邮箱 : hooya89@hooya.hk
V : hooya89

△5	→	△10	→	DIMENSIONAL TOLERANCES	APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM	
△4	→	△9	→	RANGE	TOLERANCE			LMC	SCALE	NO	
△3	→	△8	→	X	±0.30				MAT'L	***	
△2	34.4 → 33.9 2020.12.07	△7	→	X.X	±0.20				MATERIAL NO.	DRAWING NO.	
△1	28.2 → 28.4 2020.12.07	△6	→	X.XX	±0.10				REV.	WIF119008	
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1°	LEGION ELECTRONIC & HARDWARE CO., LTD.	WH-201-*****-R			A1	