
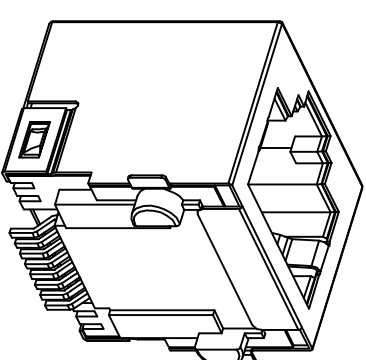
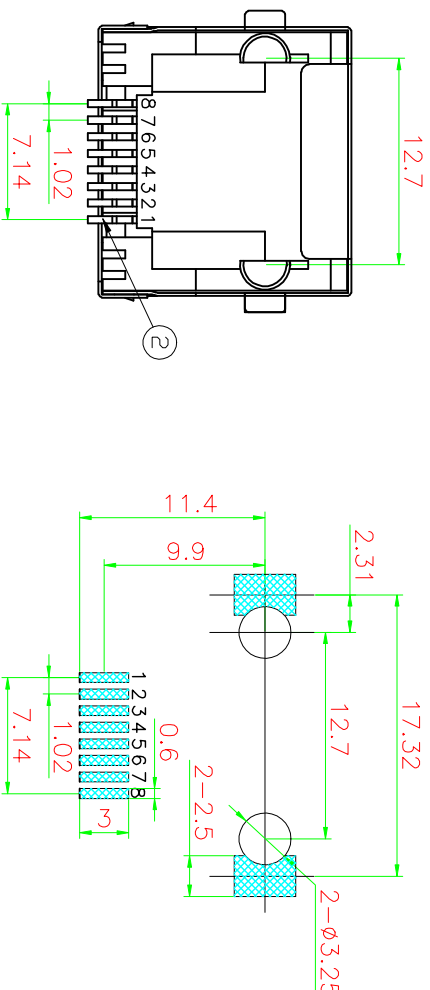


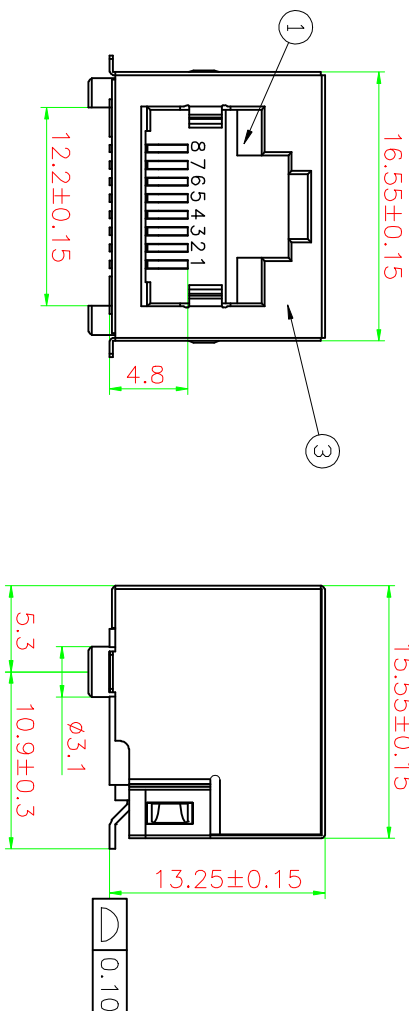

General Specification
Current Rating:1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃~+70℃
Industrial Temperature: -40℃~+85℃
Humidity: 20~70%
Contact Resistance:≤30mΩ
Insulation Resistance:≥500MΩ
Dielectric Strength:500V AC/(50HZ)/Min
Mating And Unmating Force:3~20N
Durability:750 Cycles Min

Material Specification
Housing :Thermo-plastic, UL94V-0.
Contact :Alloy Copper
Shield :Alloy Copper

Please refer to the customer drawing when customer has specified

PCB LAYOUT
RECOMMENDED

网络插座外形图

绘图: 吴鹏飞 日期: 2022.08.01

审核: 陈伟 日期: 2022.08.01

批准: 陈伟 日期: 2022.08.01

温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

品名: RCH-56-31-7P (无灯无弹)
料号: 5631TP-80002011LB09 (WR44095)
型号: RJ45 图号: 版本: 1 of 1

单位:mm 比例: 1:1 纸张: A4

序号	名称	材料	数量	镀层/颜色	备注
1	外壳	H62	1	NI	
2	插针	PHOSPHOR BRONZE	8	1U"	
3	插座	LCP	1	BLACK	

版本: A/0
变更履历: 变更履历