
MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - [ ]

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.

ORIENTATION

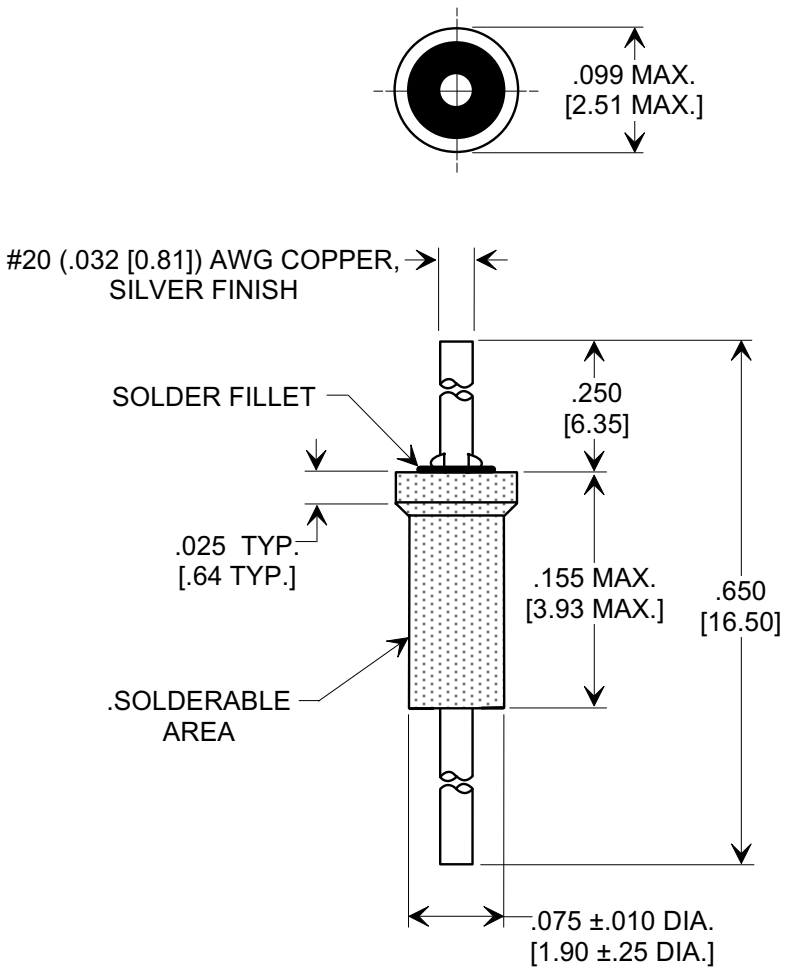

SPECIFICATIONS	
CAP. VALUE	1500 pF
CAP. TOL.	+100, -0%
TEMP. CHAR.	X5U
OPERATING TEMP.	-55° TO +125°C
OPERATING VOLT.	100 WVDC

NOTES:
1. TUSONIX STANDARD PART NUMBER: 2463-002-X5U0-152P.
   TUSONIX RoHS COMPLIANT PART NUMBER: 2463-002-X5U0-152P LF.
   CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. PART MARKING: STANDARD PART, NO MARKING.
   RoHS PART: GREEN LABELING ON PACKAGING.

X-2015 Rev-0

REVISION RECORD

0	Original Release C.O. **19980305-3-03**	
1	ADDED NOTES & SILVER FINISH. S.M. 05-20-05	**20050504-6-02**

--TOLERANCES--
Unless Otherwise Specified
DECIMAL ± **.031 [.079]**
ANGLES ±

TUSONIX
TUCSON, ARIZONA

Title
SHOULDER FEED-THRU

Drawn **S.M. 03-10-98**
Scale **NONE**
Approved **J.Mc. 03-10-98**

A **2463-002-X5U0-152P**