
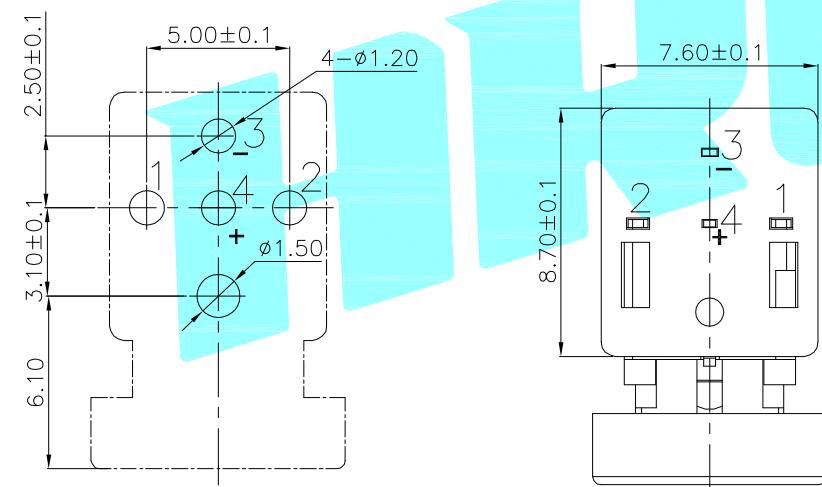
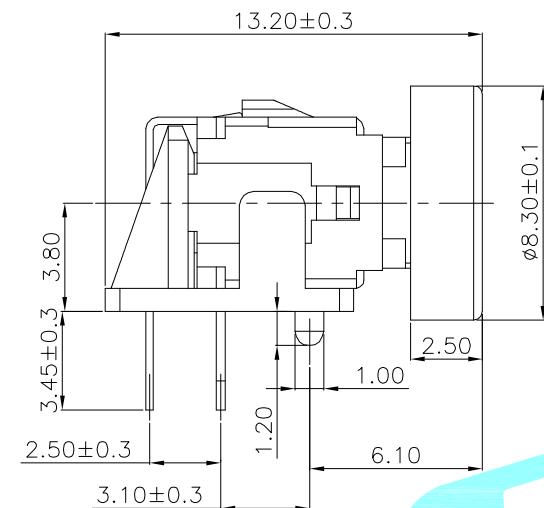
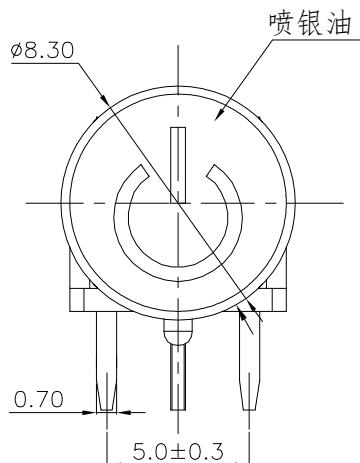



ROHS

PCB Layout(pattern Side)

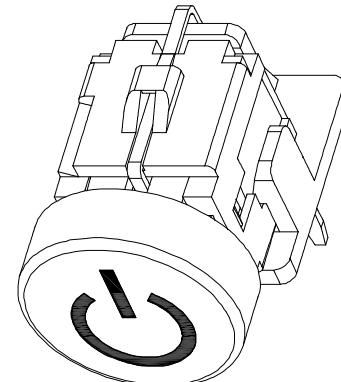

Circuit Diagram

LED colour(LED颜色)	Part No. (料号)
Whiter(白色)	K6-6277D-01
Red(红色)	K6-6277D-02
Blue(蓝色)	K6-6277D-03
Green(绿色)	K6-6277D-04
Yellow(黄色)	K6-6277D-05
Orange(橙色)	K6-6277D-06
Jade Green(翠绿色)	K6-6277D-07
Red(红色)/Blue(蓝色)	K6-6277D-23


Typical Specifications

- 1.Rating : DC 30V 0.3A
- 2.Operating Force : 250 ± 50 gf
- 3.Contact Resistance : 100mΩMAX
- 4.Life : 100,000 Cycles Min

②	Terminal	—	4	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK




APPROVALS		DATE	TITLE:	
DRAWN	J.X.Zhang	2018/08/01	PART NO.	K6-6277D-□□
CHECKED			TITLE:	
APPROVALS			PART NO.	

HIRO 
ELECTRONICS CO.,LTD



—	A	—	NEW	—	—	—	TOLERANCES ARE	30~以上 10~30 5~10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.					DRAWING NO.	—	SHEET 1 OF 1

ROHS

喷银油，加大帽子加尾缀A

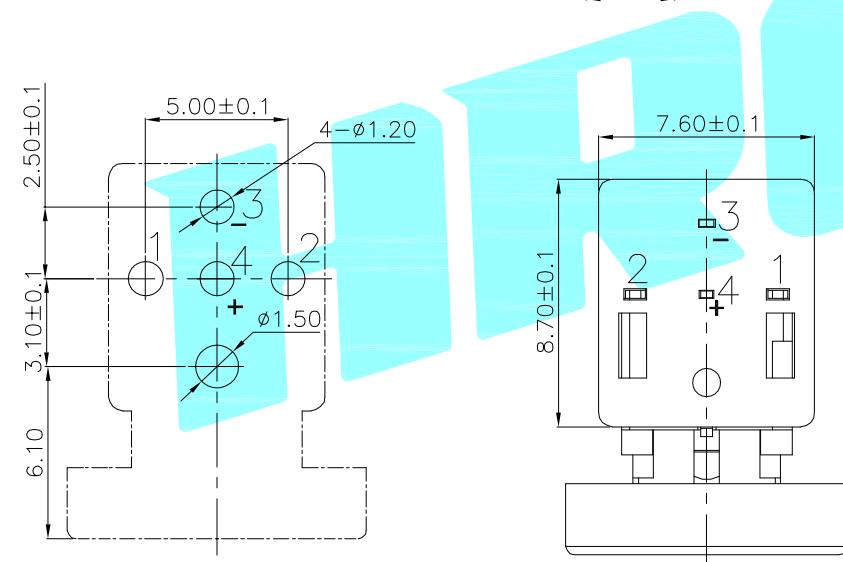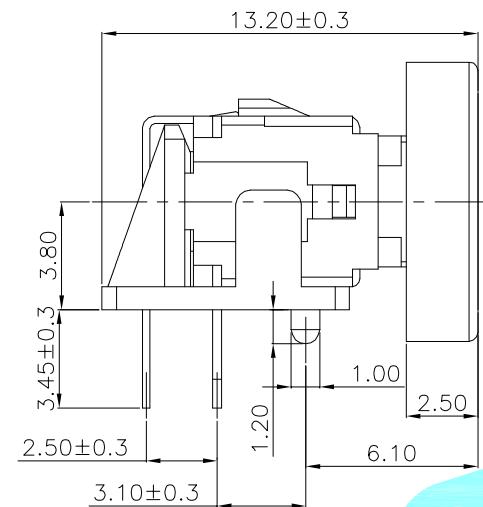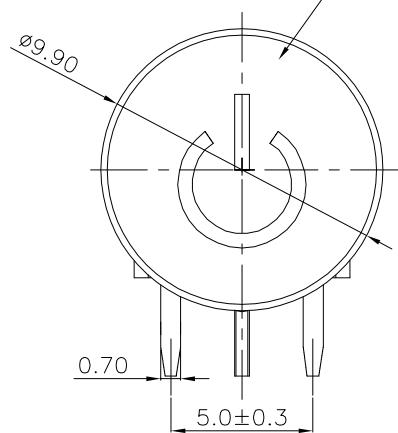

PCBLayout(pattern Side)

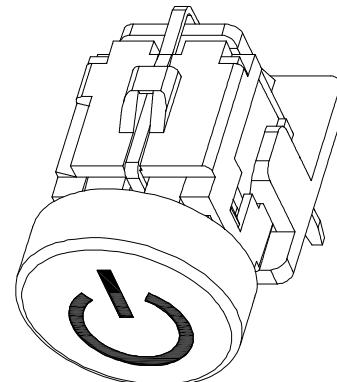


P Circuit Diagram

LED colour(LED颜色)	Part No. (料号)
Whiler(白色)	K6-6277D-01A
Red(红色)	K6-6277D-02A
Blue(蓝色)	K6-6277D-03A
Green(绿色)	K6-6277D-04A
Yellow(黄色)	K6-6277D-05A
Orange(橙色)	K6-6277D-06A
Jade Green(翠绿色)	K6-6277D-07A
Red(红色)/Blue(蓝色)	K6-6277D-23A



Typical Specifications

- 1.Rating : DC 30V 0.3A
 - 2.Operating Force : 250 ± 50 gf
 - 3.Contact Resistance : 100mΩMAX
 - 4.Life : 100,000 Cycles Min



②	Terminal	—	4	Phosphor bronze	Au Plating	—	
①	Housing	—	1	Nylon	Black	—	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK	
APPROVALS			DATE	 ELECTRONICS CO., LTD			
DRAWN	J.X.Zhang	2018/08/01					
CHECKED				TITLE:	加大款，银色帽子		
APPROVALS				PART NO.	K6-6277D-□□A		
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.20				
		5~10	±0.15				
		~ 5	±0.10	±2°	DRAWING NO.	—	SHEET 1 OF 1

ROHS

喷黑油，电源符号缺口朝下，尾缀B

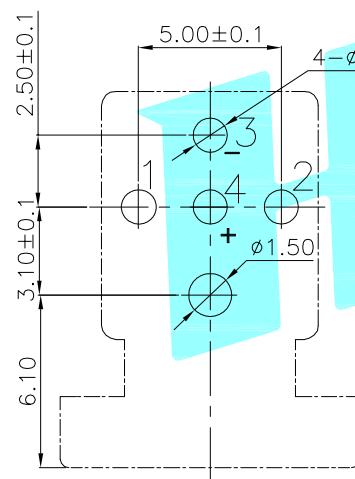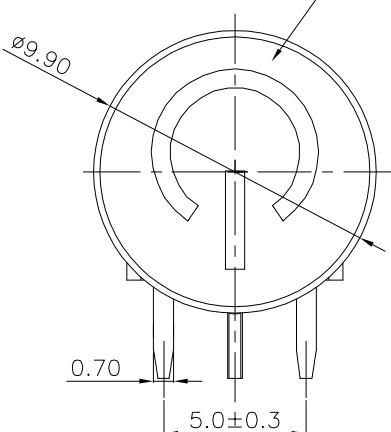

PCBLayout(pattern Side)

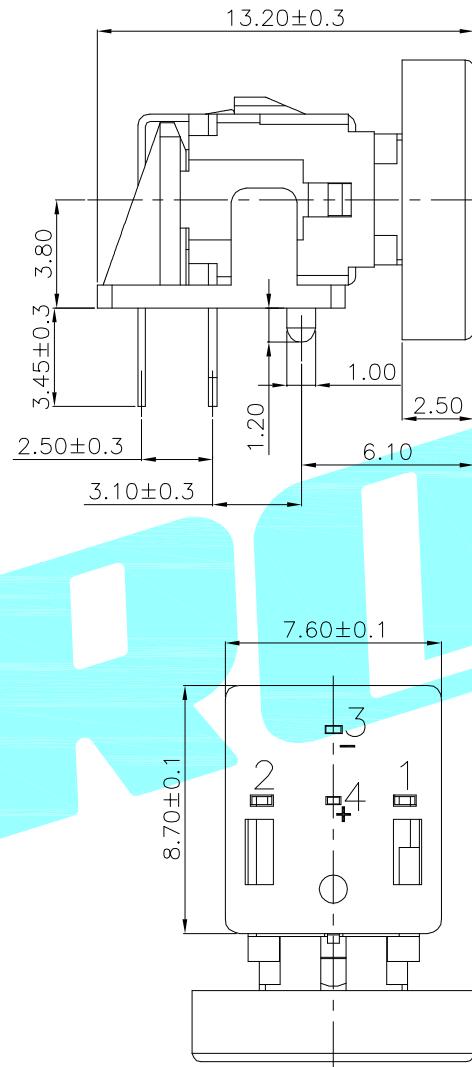

Circuit Diagram

LED colour(LED颜色)	Part No. (料号)
Whiler(白色)	K6-6277D-01B
Red(红色)	K6-6277D-02B
Blue(蓝色)	K6-6277D-03B
Green(绿色)	K6-6277D-04B
Yellow(黄色)	K6-6277D-05B
Orange(橙色)	K6-6277D-06B
Jade Green(翠绿色)	K6-6277D-07B
Red(红色)/Blue(蓝色)	K6-6277D-23B

Typical Specifications

- 1.Rating : DC 30V 0.3A
 - 2.Operating Force : 250 ± 50 gf
 - 3.Contact Resistance : 100mΩMAX
 - 4.Life : 100,000 Cycles Min

②	Terminal	_____	4	Phosphor bronze	Au Plating	_____
①	Housing	_____	1	Nylon	Black	_____
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

HRO 韩宗®
ELECTRONICS CO. LTD.

						CHECKED				TITLE: 黑帽, 电源符号朝下			
						APPROVALS				PART NO. K6-6277D-□□B			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
_____	A	_____	NEW	_____	_____	_____	_____	10~30	±0.20	_____	_____	_____	_____