RoHS


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW	R.Q	2021.12.15

NOTES:

1.Rated voltage : 250V(Max)
2.Current Rating: 3.0 AMP (Max.)
3.Contact Resistance: 30mΩ (Max.)
4.Withstanding voltage : 1000V AC/Minute
5.Insulation Resistance: 1000MΩ (Min)
6.Operation Temperature: −40℃ to +105℃

MATERIAL:


1.Housing : PBT (UL94V−0)
2.Contact : Copper Alloy, Au/Sn over Ni Plating
3.Shell : Steel, Ni or Sn Plated

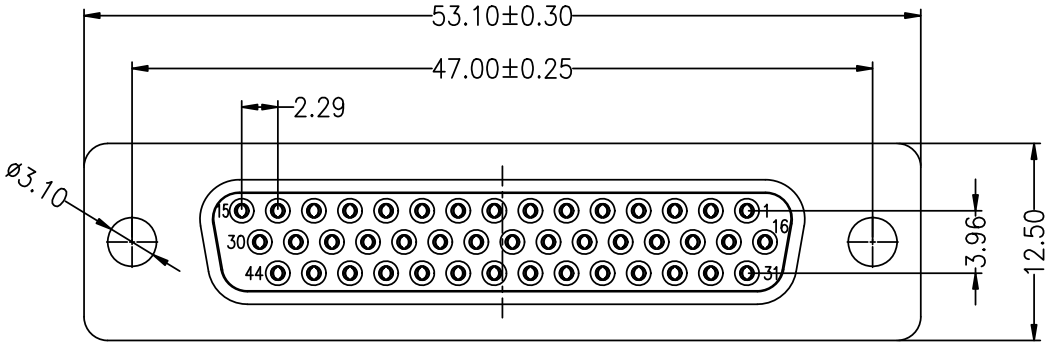

Ordering Information

6235-03 F 44 XX D X A XX

- Connector Type: F=Female, M=Male
- No.of Pins: 15,26, 44P
- Contact Plating: S0:Gold Flash/Tin, G0:Gold Flash, G2:2u" Gold, G3:3u" Gold, G4:5u" Gold
- Color: B=Black, W=Whtie, U=Blue
- Packing: A=Tray
- Serial code

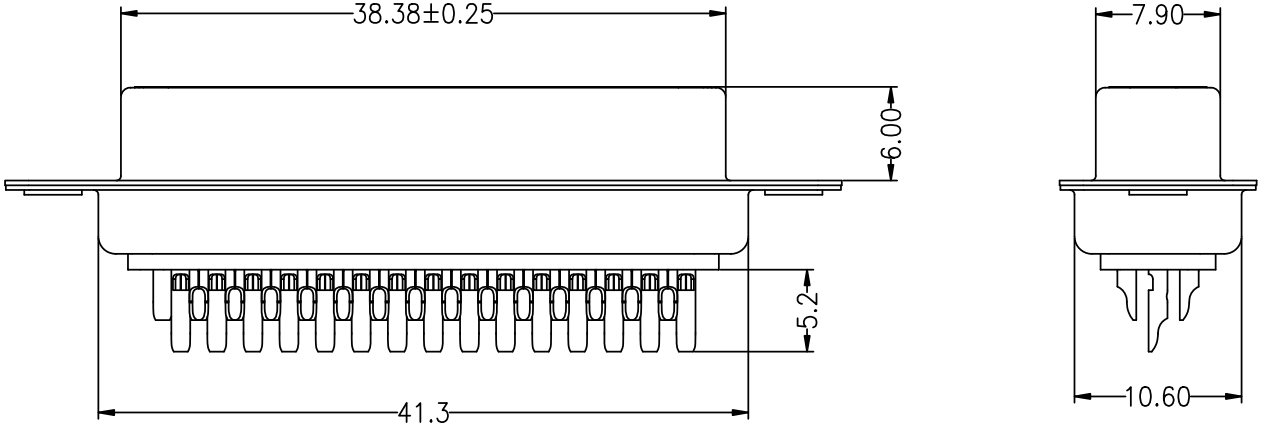

		OPERATION		SCALE	FIT
DRAW		X.X	±0.30	UNIT	mm
CHECK		X.XX	±0.20	SIZE	A4
APPROVE		X.XXX	±0.10	SHEET	1/1
		Angle	±3°	PROJ.	

JILN® 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO.,LTD

PART NO.	6235-03F44XXDXAXX
TITLE:	HDB-44P母/传统焊线式