

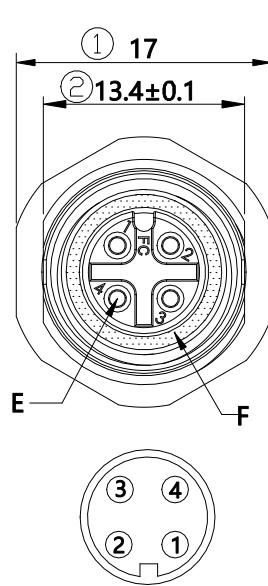


日期 Date	修改内容 Description	变更编号 ECN NO.
Dec.06,2018	First release	---
Apr.17,2020	Nut "D" be delivered separately 	---

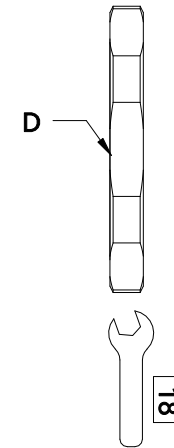


PIN View from front

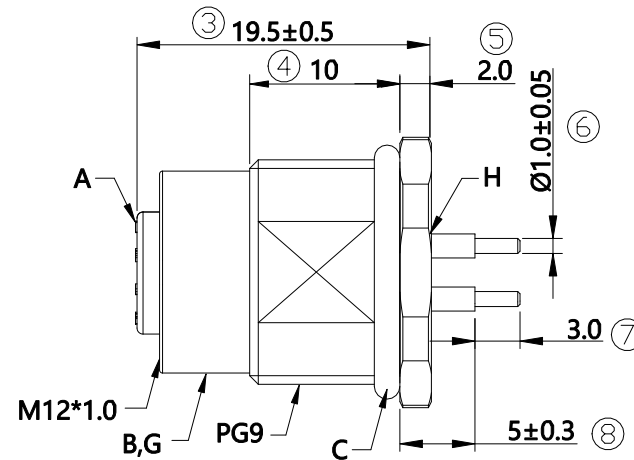


Note:

1. Waterproof Rate: IP67 in locked condition
2. Temperature Range: -25°C ~ +90°C
3. Rating voltage: 250V AC/DC
4. Rating current: 4A
5. All materials are RoHS/REACH compliant
6. Recommended torque: 0.6Nm
Maximum endurance torque: 1.0Nm.
7. Nut "D" be delivered separately, 50PCS/PE bag.

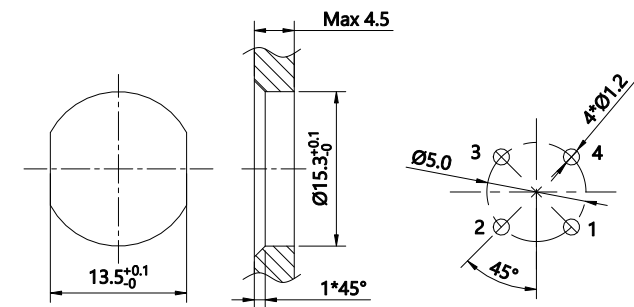

Recommended panel cut-out and PCB layout

H		Resin	Black epoxy resin	g	2
G		Ring	Black rubber O-ring	pcs	1
F		Ring	Green rubber O-ring	pcs	1
E		Ter.	M12 female terminal, brass with gold plated, PCB type	pcs	4
D		Nut	PG9 nut, brass with nickel plated, H=18mm, T=3.0mm	pcs	1
C		Ring	Black rubber O-ring	pcs	1
B		Screw	M12/PG9 screw, brass with nickel plated	pcs	1
A		Hous.	M12 4P A-code black female housing	pcs	1
编号 No.	料号 Materials No.	品名 Name	材料规格 Description	单位 Unit	用量 Qty
文件路径 File Path			\\Eng\工程图纸		

FINECABLES®							
图号 File No.	A000-CP-T2061		客户料号 Cus' P/N	MB12FBAFF04ST-3		当前版本 Revision	A1
未注公差 No specified tolerance			核准 Approved	Johnson 2022/6/15	单位 Unit	mm	
线性 Linear	0.5~6	±0.1	审核 Checked	Bob 2022/6/15	比例 Scale	--	
	>6~30	±0.2					
	>30	±2%					
角度 Angles	±3°		绘图 Drawing	Payne	页码 Page	1/1	