
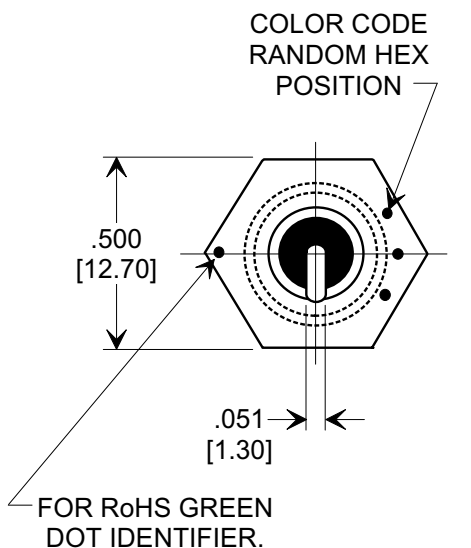




This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

MARKETING SALES DRAWING **DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING** **DIMENSIONS IN METRIC - []**

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.



NOTE:
LEAD ORIENTATION
TO HEX NUT REQ'D.

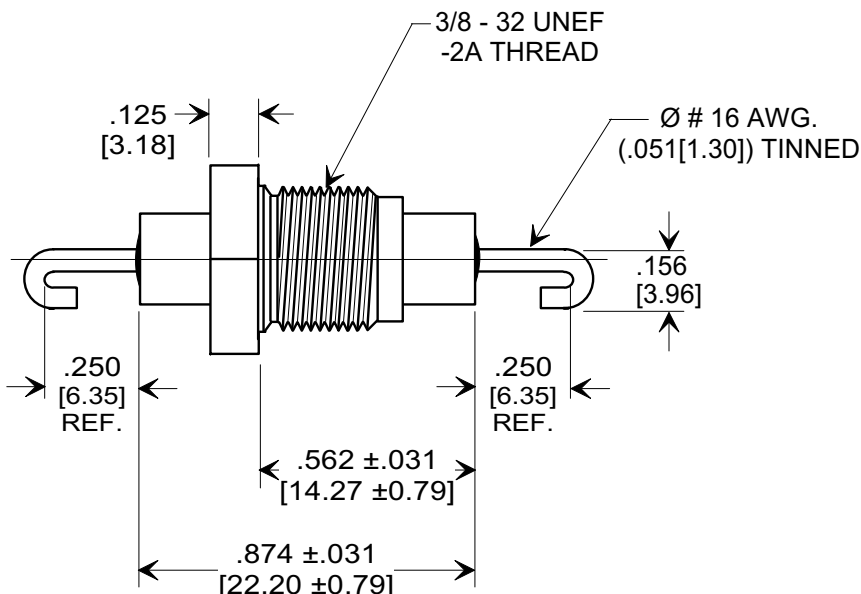

NOTES:

- TUSONIX STANDARD PART NUMBER: 2432-032-X5U0-402M.
TUSONIX RoHS COMPLIANT PART NUMBER: 2432-032-X5U0-402M LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- MATERIALS: SILVER PLATED BUSHING, LEAD, AND MOUNTING HARDWARE.
- PART MARKING: 3 DOT COLOR CODE; STANDARD PART: COLORS PER VARIATION.
RoHS PART: 3 DOT COLOR CODE PER VARIATION PLUS ADDITIONAL GREEN INK DOT OPPOSITE ON TOP OF HEX.
- SUPPLIED WITH HEX NUT AND LOCK WASHER.
- MAXIMUM RECOMMENDED MOUNTING TORQUE, 9.0 lb-in [1.02 Nm]

SPECIFICATIONS

TUSONIX PART NO.	2432-032-X5U0-402M
Capacitance:	4000 pF
Tolerance:	± 20 %
Temp. Coefficient:	X5U
Operating Temp.:	-55°C TO 85°C
Working Voltage:	2000 VDC
To Tusonix Spec Unless Stated Otherwise	

REVISION RECORD									
Original Release C.O. 5871		0							
REV'D. F.G. 04-30-91									
5901		1							
RDN TO COMP FMT. S.M. 07-18-00									
20000717-5-02		2							
ADDED NOTES & GREEN DOT. S.M. 05-02-06									
20060501-1-03		3							
				--TOLERANCES-- Unless Otherwise Specified		Title HIGH VOLTAGE FEED - THRU CAPACITOR			
				DECIMAL ± .015 [0.38]					
				ANGLES ± 		Drawn S.M. 07-13-00		Scale 2 X	
				TUSONIX TUCSON, ARIZONA		Approved T.C. 07-13-00			
						A		2432-032-X5U0-402M	