
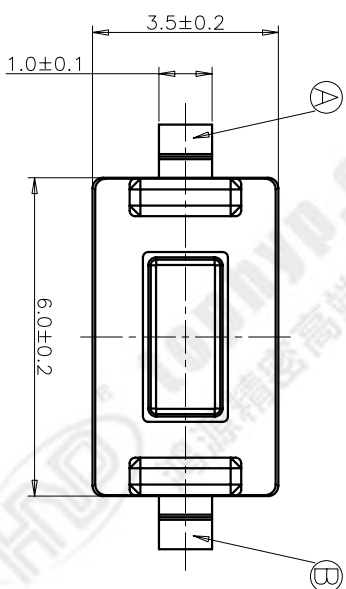


CIRCUIT DIAGRAM



回路图

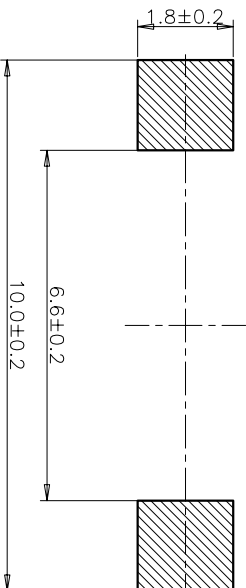

RECOMMENDED P.C.B. LAYOUT

安装尺寸图

规格 Specifications	
额定负荷 Rating	DC 12V/50mA
接触电阻 Contact Resistance	100mΩ max.
绝缘电阻 Insulation resistance	DC100V 60S 100MΩ min.
抗电强度 Dielectric strength	AC250V(50~60HZ) 60S min.
操作力 Operation force	160±30gf
寿命试验 Operating Life	150,000 cycles
行程 Travels	0.25±0.1mm

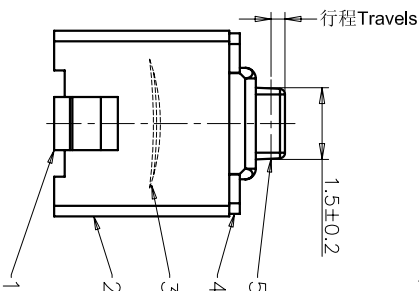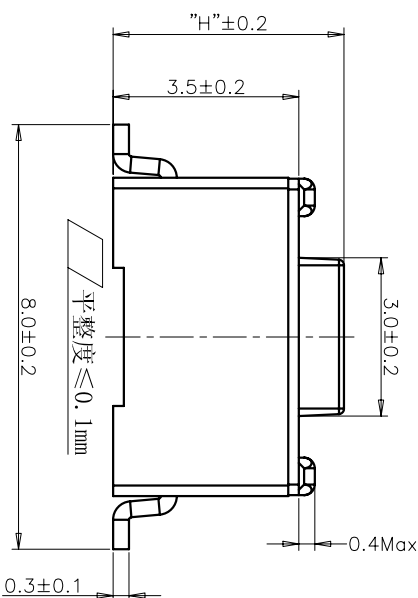

PRODUCT NO.: 1TS002B***-*****A2 - CT

- 轻触开关
- 3X6系列
- 外形:
- A=插脚
- B=贴片
- C=贴片带柱
- E=贴片2.5高
- K=贴片带柱8.8
- L=贴片10.2
- 按钮颜色:
- 底座颜色:
- 盖板颜色:
- 操作力度:
- 手感:
- 产品高度 (H):
- 材质:
- 0=Pb66
- 1=LCP+PPA
- 2=LCP
- 3=LCP+PPA(双弹片)
- 4=新增材质
- 依次增加
- 非编带
- 编带
- 0=常规
- 1=大手感
- 2=小手感
- 3=特殊手感
- 初始颜色
- 则不启用
- 130=130gf
- 160=160gf
- 180=180gf
- 220=220gf
- 250=250gf
- 260=260gf
- 300=300gf

ITEM	PART NAME	QUANTITY	MATERIAL	FINISH
5	ACTUATOR	1	LCP	WHITE
4	COVER	1	STAINLESS STEEL	NATURAL
3	DOVE	1	STAINLESS STEEL	Ag-PLATED
2	HOUSING	1	PPA	WHITE
1	TERMINAL	1	BRASS	Ag-PLATED
NAME(INTENDED USE)	3X6 SMT SERIES TACT SWITCH	HON YUAN		
NAME(INTENDED USE)	3X6 SMT SERIES TACT SWITCH	HON YUAN PRECISION IND. CO.,LTD.		
NAME(INTENDED USE)	3X6 SMT SERIES TACT SWITCH	SHENZHEN, CHINA, R.O.C.		
NAME(INTENDED USE)	3X6 SMT SERIES TACT SWITCH	PRODUCT DRAWING		
NAME(INTENDED USE)	3X6 SMT SERIES TACT SWITCH	DWG NO.: 1TS002B-1600-4301A2-CT		
NAME(INTENDED USE)	3X6 SMT SERIES TACT SWITCH	APPD: ZO 2012/2/12		
NAME(INTENDED USE)	3X6 SMT SERIES TACT SWITCH	CHKD: M.H.Li 2012/2/12		
NAME(INTENDED USE)	3X6 SMT SERIES TACT SWITCH	DR: WP.LU 2012/2/12		
NAME(INTENDED USE)	3X6 SMT SERIES TACT SWITCH	SCALE SHEET REV.		
NAME(INTENDED USE)	3X6 SMT SERIES TACT SWITCH	10/1 1/1 A		