


* Mating Part can Pre-Load Actuator
down to .295 (7.49) Max..

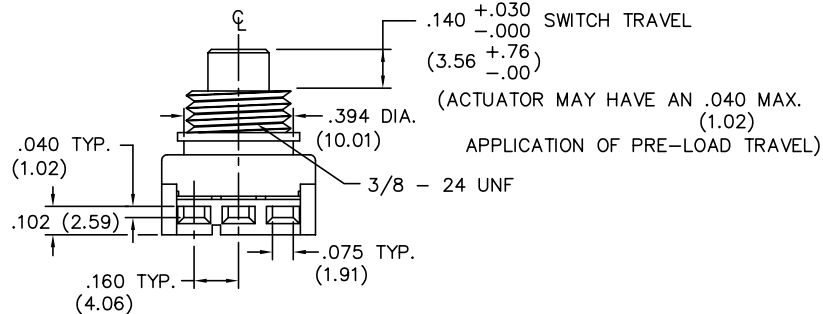

Technical drawing of a three-plate assembly. The drawing shows three plates of different thicknesses stacked vertically. The top plate has a thickness of .160 TYP. (4.06). The middle plate has a thickness of .065 TYP. (1.65). The bottom plate has a thickness of .025 $\begin{smallmatrix} +.002 \\ -.001 \end{smallmatrix}$ MATERIAL. The total thickness of the assembly is .250 TYP. (6.35). The drawing also shows a dimension of .025 $\begin{smallmatrix} +.002 \\ -.001 \end{smallmatrix}$ MATERIAL and a dimension of .065 $\begin{smallmatrix} +.005 \\ -.003 \end{smallmatrix}$ THICKNESS.

Technical drawing of a three-pronged electrical plug. The drawing shows three vertical prongs of equal height and width, spaced evenly on a common base. Dimensions and tolerances are provided for each feature:

- Prong Width:** .065 TYP. (1.65)
- Prong Spacing:** .160 TYP. (4.06)
- Prong Height:** .216 (5.49)
- Prong Tip Width:** .025 $\begin{matrix} +.002 \\ -.001 \end{matrix}$
- Base Width:** .064 $\begin{matrix} +.05 \\ -.03 \end{matrix}$
- Material Thickness:** .025 $\begin{matrix} +.002 \\ -.001 \end{matrix}$

TERMINATION – Insert male tabs into switch housing using side or bottom termination option. Refer to termination option layout for dimensions.”

GC-536-0002

GC-536-0002

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

REVISIONS

FORM-B3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CW Industries:](#)

[GF-1126-0001](#)