


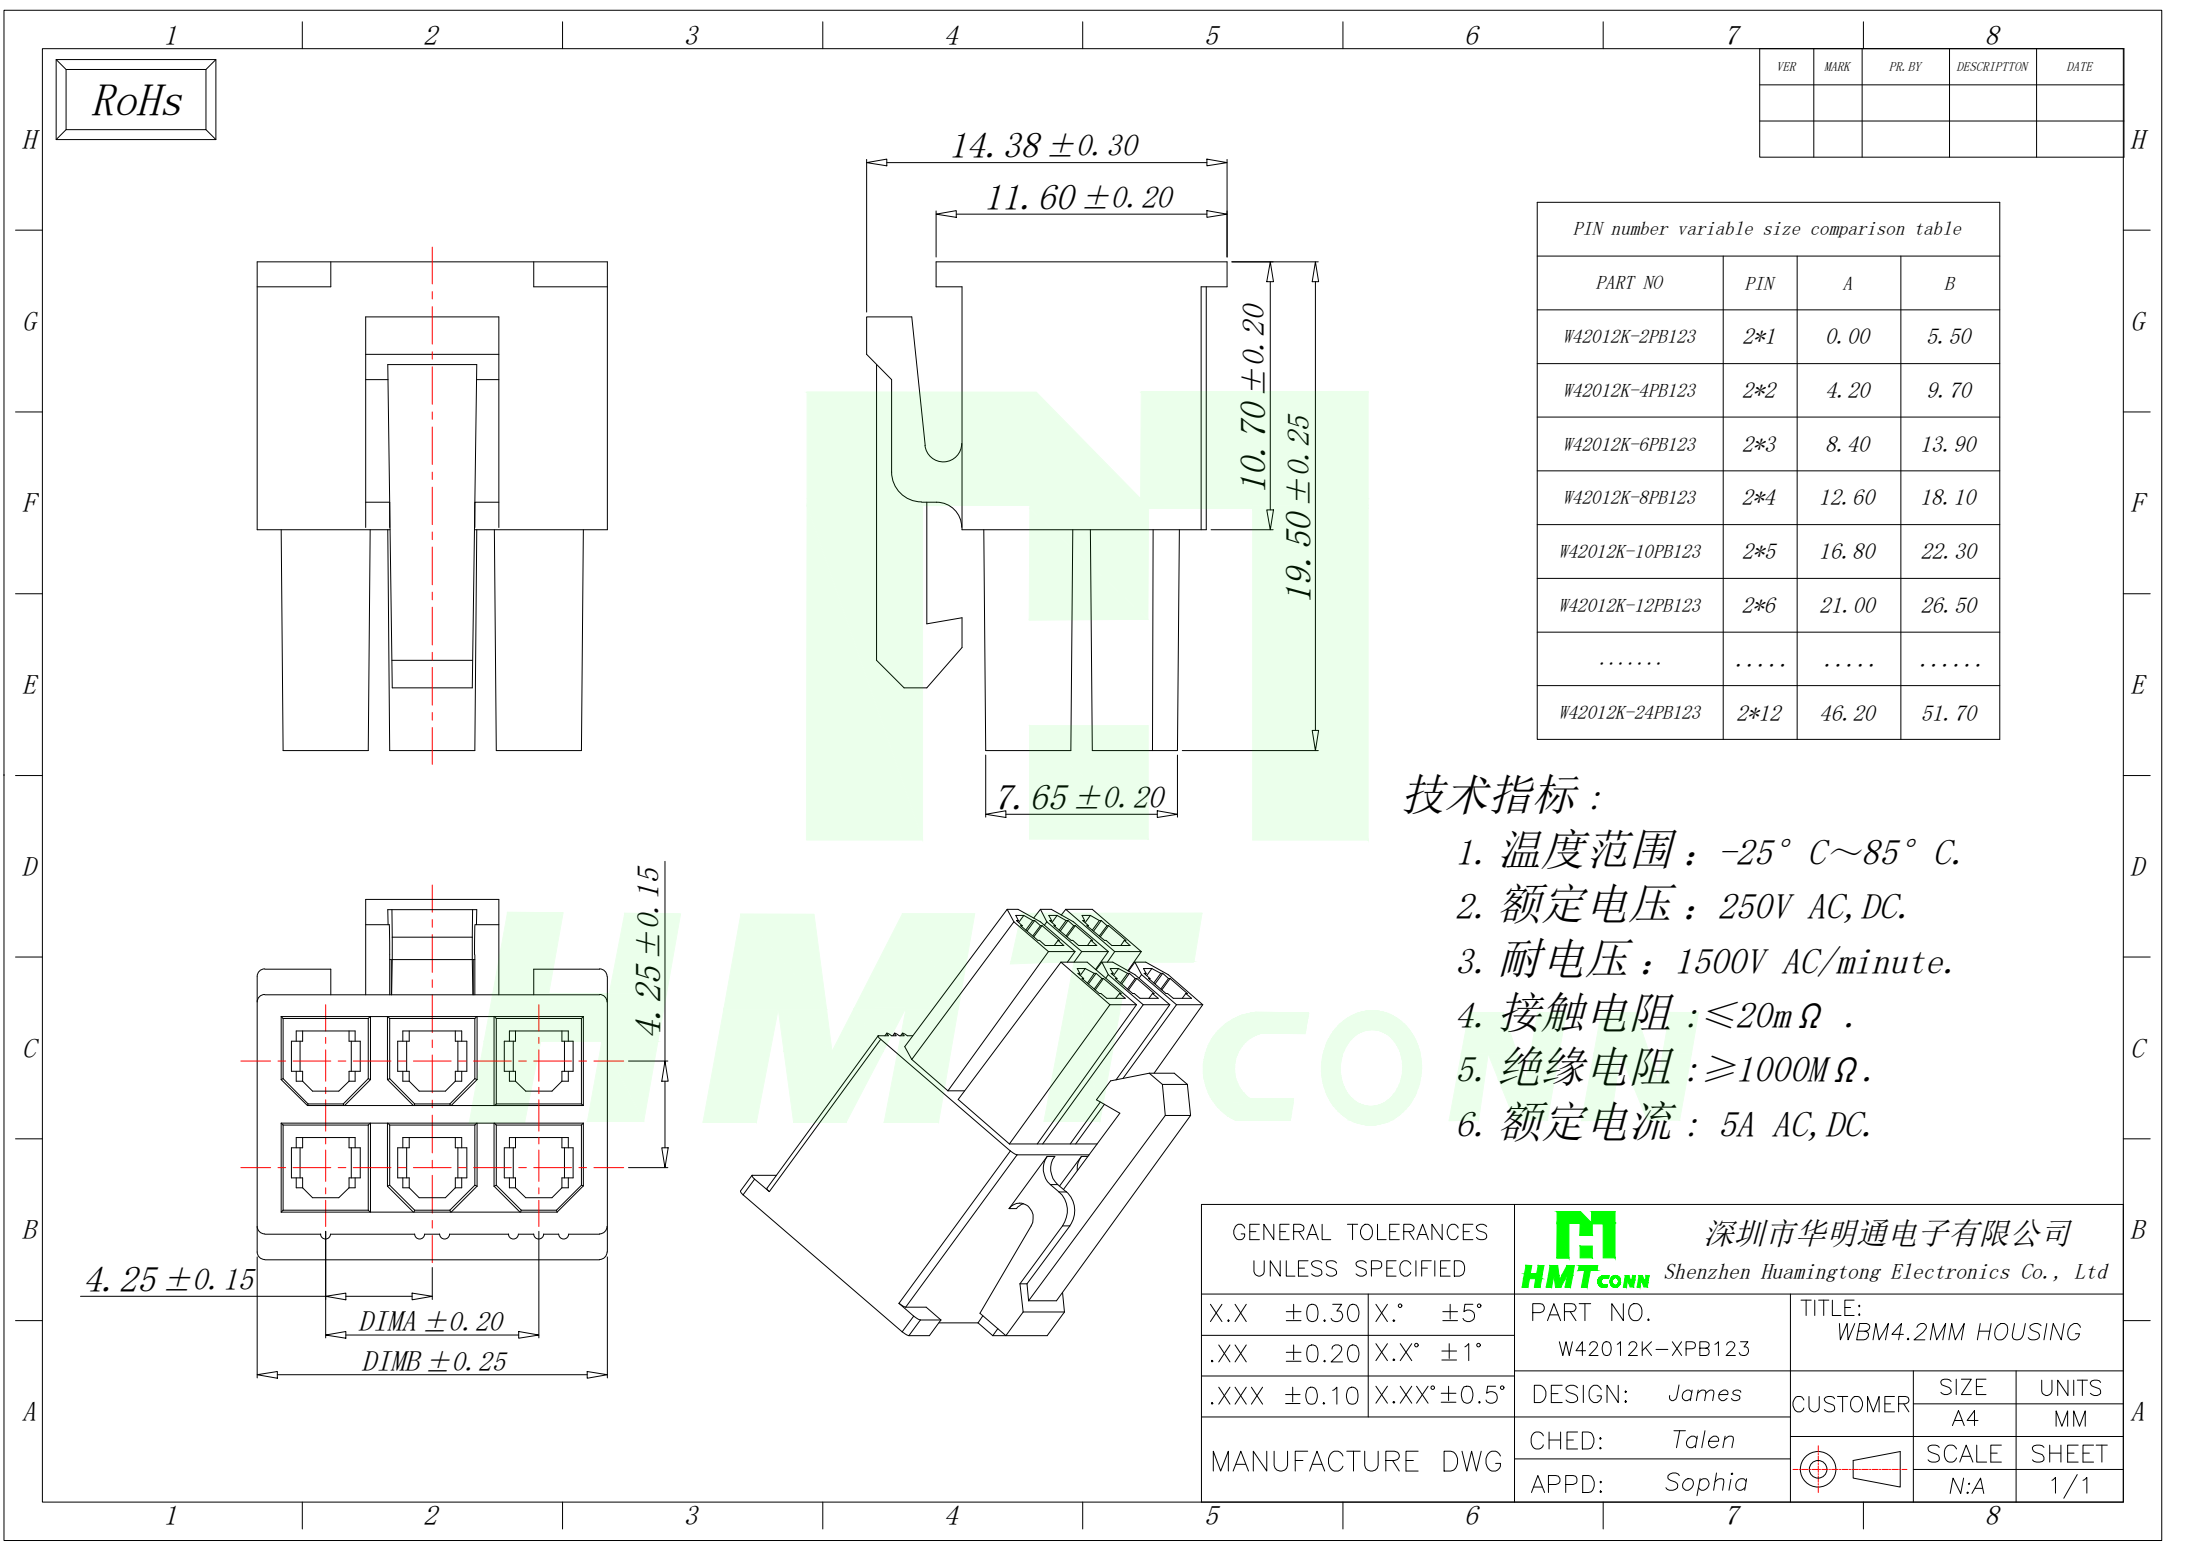


RoHS

VER	MARK	PR. BY	DESCRIPTION	DATE

PIN number variable size comparison table			
PART NO	PIN	A	B
W42012K-2PB123	2*1	0.00	5.50
W42012K-4PB123	2*2	4.20	9.70
W42012K-6PB123	2*3	8.40	13.90
W42012K-8PB123	2*4	12.60	18.10
W42012K-10PB123	2*5	16.80	22.30
W42012K-12PB123	2*6	21.00	26.50
.....			
W42012K-24PB123	2*12	46.20	51.70

- 技术指标：
1. 温度范围：-25° C~85° C.
 2. 额定电压：250V AC, DC.
 3. 耐电压：1500V AC/minute.
 4. 接触电阻： $\leq 20\text{m}\Omega$.
 5. 绝缘电阻： $\geq 1000\text{M}\Omega$.
 6. 额定电流：5A AC, DC.

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd	
X.X ±0.30	X.° ±5°	PART NO.	TITLE:
.XX ±0.20	X.X° ±1°	W42012K-XPB123	WBM4.2MM HOUSING
.XXX ±0.10	X.XX° ±0.5°	DESIGN: James	CUSTOMER
MANUFACTURE DWG		CHED: Talen	SIZE
		APPD: Sophia	UNITS
			SCALE
			SHEET
			N:A 1/1