
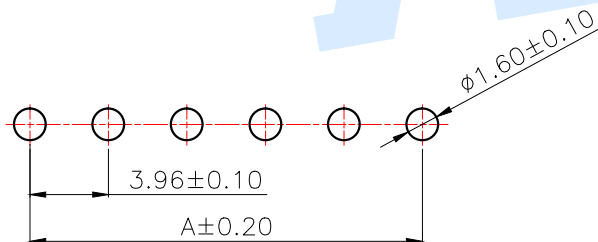
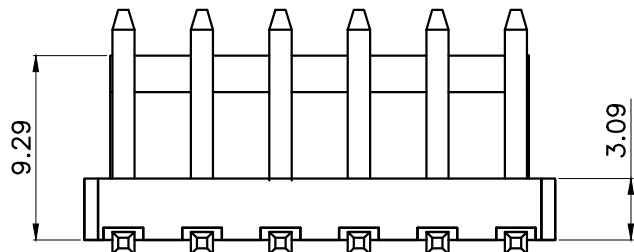
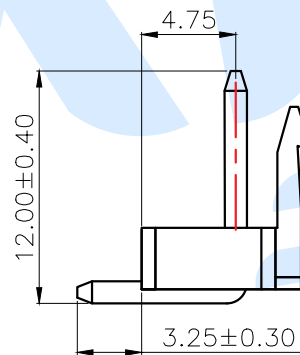
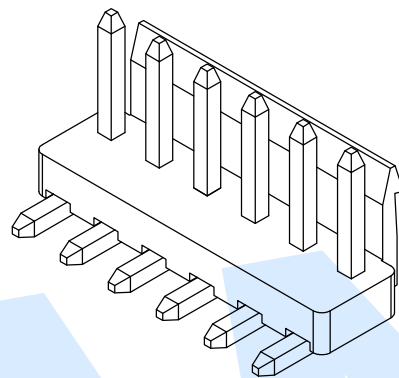


RoHS

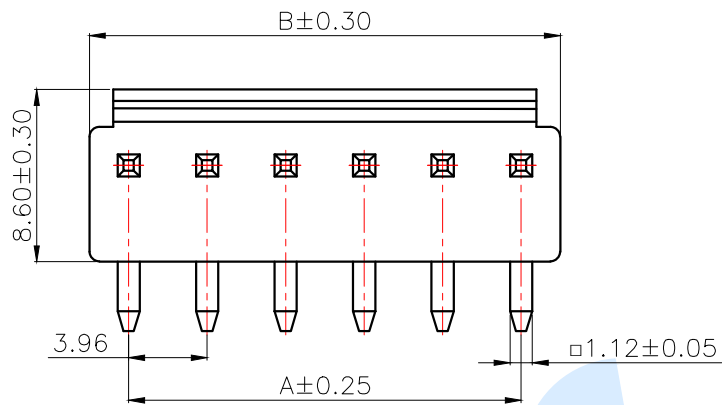

适用线路板 (PCB LAYOUT)

Model No.	Pin	A	B
WAFER-VH3.96-2PWZ-W	2	3.96	7.92
WAFER-VH3.96-3PWZ-W	3	7.92	11.88
WAFER-VH3.96-4PWZ-W	4	11.88	15.84
WAFER-VH3.96-5PWZ-W	5	15.84	19.80
WAFER-VH3.96-6PWZ-W	6	19.80	23.76
WAFER-VH3.96-7PWZ-W	7	23.76	27.72
WAFER-VH3.96-8PWZ-W	8	27.72	31.68
WAFER-VH3.96-9PWZ-W	9	31.68	35.64
WAFER-VH3.96-10PWZ-W	10	35.64	39.60
WAFER-VH3.96-11PWZ-W	11	39.60	43.56
WAFER-VH3.96-12PWZ-W	12	43.56	47.52
WAFER-VH3.96-13PWZ-W	13	47.52	51.48
WAFER-VH3.96-14PWZ-W	14	51.48	55.44

Specifications/技术规格:

- 1.Poles/线数: 2~14P
- 2.Wire range/适用线规: AGW 22#~18#
- 3.Applicable PC board thickness/适用PC板厚度: 1.6mm
- 4.Current rating/额定电流: 7.0A
- 5.Voltage rating/额定电压: 250V DC/AC
- 6.Insulation Resistance/绝缘电阻: 1000MΩ Min
- 7.Dielectric Withstanding/ 耐电压: 1500V AC/minute
- 8.Contact Resistance/ 接触电阻: 20mΩ Max
- 9.Operating Temperature/ 工作温度: -25℃ to +85℃

⑧	Terminal			Brass	Plating Sn
⑨	Housing		1	PA66	White
NO.	Name	Number	Qty	Materil	Remarks

YUANDI® Yuandi Electronics Co.,Ltd

design	date	name	WAFER CONNECTOR
Review	date	model	WAFER-VH3.96-□□PWZ-W
Approved	date		

Drawing number:	Proportion	1:1	unit	mm	gaps number	A4
-----------------	------------	-----	------	----	-------------	----