

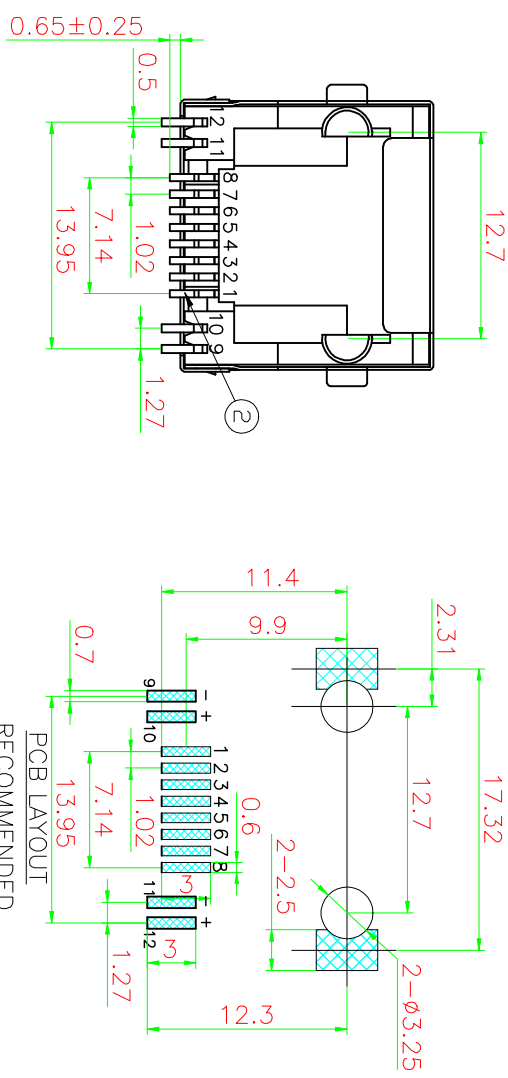


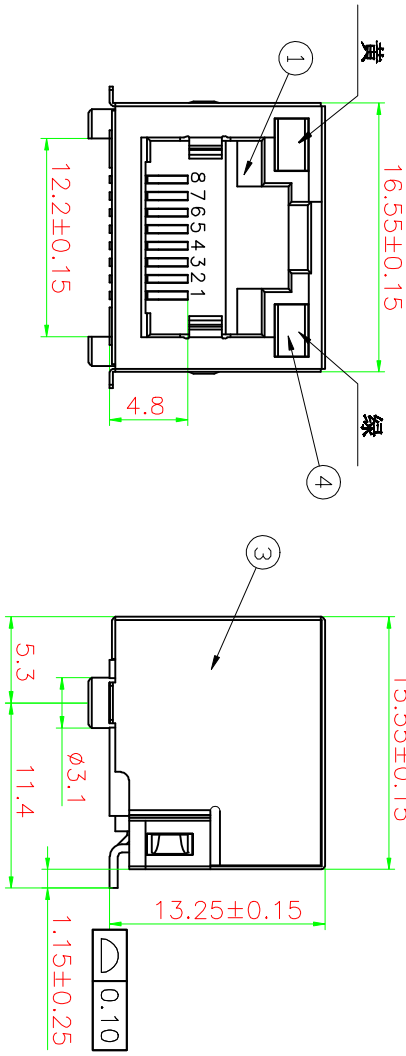

PCB LAYOUT
RECOMMENDED

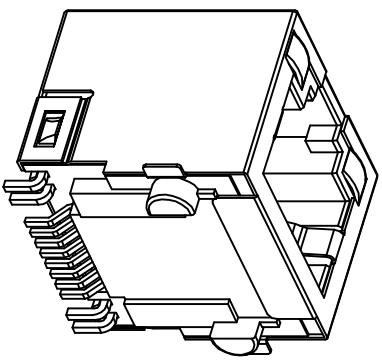

General Specification
Current Rating:1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃~+70℃
Industrial Temperature: -40℃~+85℃
Humidity: 20~70%
Contact Resistance: ≤30mΩ
Insulation Resistance: ≥500MΩ
Dielectric Strength:500V AC/(50HZ)/Min
Mating And unmating Force:3~20N
Durability:750 Cycles Min

Material Specification
Housing :Thermo-plastic, UL94V-0.
Contact :Alloy Copper
Shield :Alloy Copper

Please refer to the customer drawing when customer has specified

网络插座外形图



温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

绘图:	吴鹏飞	日期:	2022.03.28
审核:	陈伟	日期:	
批准:	陈伟	日期:	

版本号	变更履历	变更单号	绘制日期	核准日期	图面提供	温州瑞川电子有限公司	内部使用,不得私自复印
A/0	新出版发行		20220328				