

## ISP281



### DESCRIPTION

The ISP281 series optocoupler each consists of an infrared emitting diode optically coupled to an NPN silicon photo transistor.

This device belongs to Isocom Compact Range of Optocouplers.

### FEATURES


- Half Pitch 1.27mm
- CTR Selections Available
- Wide Operating Temperature Range  
- 55°C to +110°C
- High AC Isolation voltage 3750V<sub>RMS</sub>
- Lead Free and RoHS Compliant
- Safety Approvals Pending

### APPLICATIONS

- Switching Mode Power Supplies
- Computer Terminals
- Industrial System Controllers
- Measuring Instruments
- Signal Transmission between Systems of Differential Potentials and Impedances

### ORDER INFORMATION

- Available in Tape and Reel with 3000 pieces per reel

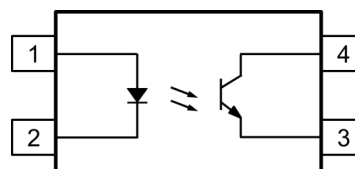

- 1 Anode
- 2 Cathode
- 3 Emitter
- 4 Collector

### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C)

Stresses exceeding the absolute maximum ratings can cause permanent damage to the device. Exposure to absolute maximum ratings for long periods of time can adversely affect reliability.

#### Input

|                       |       |
|-----------------------|-------|
| Forward Current       | 50mA  |
| Pulse Forward Current | 1A    |
| Reverse Voltage       | 6V    |
| Power Dissipation     | 70mW  |
| Junction Temperature  | 125°C |

#### Output

|                                               |       |
|-----------------------------------------------|-------|
| Collector to Emitter Voltage V <sub>CEO</sub> | 80V   |
| Emitter to Collector Voltage V <sub>ECO</sub> | 7V    |
| Collector Current                             | 50mA  |
| Power Dissipation                             | 150mW |
| Junction Temperature                          | 125°C |

#### Total Package

|                                  |                      |
|----------------------------------|----------------------|
| Isolation Voltage                | 3750V <sub>RMS</sub> |
| Total Power Dissipation          | 200mW                |
| Operating Temperature            | -55 to 110°C         |
| Storage Temperature              | -55 to 150°C         |
| Lead Soldering Temperature (10s) | 260°C                |

#### ISOCOM COMPONENTS 2004 LTD

Unit 25B, Park View Road West, Park View Industrial Estate  
Hartlepool, Cleveland, TS25 1PE, United Kingdom  
Tel : +44 (0)1429 863 609 Fax : +44 (0)1429 863 581  
e-mail : sales@isocom.co.uk  
<http://www.isocom.com>

#### ISOCOM COMPONENTS ASIA LTD

Hong Kong Office  
Block A, 8/F, Wah Hing Industrial Mansions  
36 Tai Yau Street, San Po Kong, Kowloon, Hong Kong  
Tel : +852 2995 9217 Fax : +852 8161 6292  
e-mail : sales@isocom.com.hk

## ISP281

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified. Typical Values at $T_A = 25^\circ\text{C}$ )

#### INPUT

| Parameter            | Symbol   | Test Condition                      | Min | Typ. | Max | Unit          |
|----------------------|----------|-------------------------------------|-----|------|-----|---------------|
| Forward Voltage      | $V_F$    | $I_F = 20\text{mA}$                 |     |      | 1.4 | V             |
| Reverse Current      | $I_R$    | $V_R = 4\text{V}$                   |     |      | 10  | $\mu\text{A}$ |
| Terminal Capacitance | $C_{IN}$ | $V = 0\text{V}$ , $f = 1\text{KHz}$ |     | 30   | 250 | pF            |

#### OUTPUT

| Parameter                           | Symbol    | Test Condition                             | Min | Typ. | Max | Unit |
|-------------------------------------|-----------|--------------------------------------------|-----|------|-----|------|
| Collector-Emitter Breakdown Voltage | $V_{CEO}$ | $I_C = 0.1\text{mA}$ , $I_F = 0\text{mA}$  | 80  |      |     | V    |
| Emitter-Collector Breakdown Voltage | $V_{ECO}$ | $I_E = 0.01\text{mA}$ , $I_F = 0\text{mA}$ | 7   |      |     | V    |
| Collector Dark Current              | $I_{CEO}$ | $V_{CE} = 20\text{V}$ , $I_F = 0\text{mA}$ |     |      | 100 | nA   |

## ISP281

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified. Typical Values at $T_A = 25^\circ\text{C}$ )

#### COUPLED

| Parameter                            | Symbol        | Test Condition                                                                               | Min | Typ. | Max | Unit          |
|--------------------------------------|---------------|----------------------------------------------------------------------------------------------|-----|------|-----|---------------|
| Current Transfer Ratio               | CTR           | $I_F = 5\text{mA}$ , $V_{CE} = 5\text{V}$                                                    |     |      |     | %             |
|                                      |               | ISP281                                                                                       | 50  |      | 600 |               |
|                                      |               | ISP281A                                                                                      | 80  |      | 160 |               |
|                                      |               | ISP281B                                                                                      | 130 |      | 260 |               |
|                                      |               | ISP281C                                                                                      | 200 |      | 400 |               |
|                                      |               | ISP281D                                                                                      | 300 |      | 600 |               |
|                                      |               | ISP281E                                                                                      | 100 |      | 200 |               |
|                                      |               | ISP281GR                                                                                     | 100 |      | 300 |               |
|                                      |               | ISP281GB                                                                                     | 100 |      | 600 |               |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_F = 8\text{mA}$ , $I_C = 2.4\text{mA}$                                                    |     |      | 0.4 | V             |
| Floating Capacitance                 | $C_f$         | $V = 0\text{V}$ , $f = 1\text{MHz}$                                                          |     | 0.6  | 1   | pF            |
| Rise Time                            | $t_r$         | $V_{CC} = 10\text{V}$ ,<br>$I_C = 2\text{mA}$ ,<br>$R_L = 100\Omega$ ,<br>$f = 100\text{Hz}$ |     | 2    | 18  | $\mu\text{s}$ |
| Fall Time                            | $t_f$         |                                                                                              |     | 3    | 18  |               |
| Turn-On Time                         | $t_{ON}$      |                                                                                              |     | 3    |     |               |
| Turn-Off Time                        | $t_{OFF}$     |                                                                                              |     | 3    |     |               |
| Storage Time                         | $t_s$         | $V_{CC} = 5\text{V}$ ,<br>$I_F = 16\text{mA}$ ,<br>$R_L = 1.9\text{k}\Omega$                 |     | 25   |     |               |
| Turn-On Time                         | $t_{ON}$      |                                                                                              |     | 2    |     |               |
| Turn-Off Time                        | $t_{OFF}$     |                                                                                              |     | 40   |     |               |

Any grade of the ISP281 will satisfy the base ISP281 specification.


Grade B will satisfy the ISP281GR specification

Grade B / C / D / E will satisfy the ISP281GB specification


#### ISOLATION

| Parameter                 | Symbol    | Test Condition                                    | Min                | Typ.               | Max | Unit      |
|---------------------------|-----------|---------------------------------------------------|--------------------|--------------------|-----|-----------|
| Isolation Voltage         | $V_{ISO}$ | R.H. = 40% to 60 %, $t = 1\text{min}$             | 3750               |                    |     | $V_{RMS}$ |
| Input - Output Resistance | $R_{I-O}$ | $V_{I-O} = 500\text{VDC}$ ,<br>R.H. = 40% to 60 % | $5 \times 10^{10}$ | $1 \times 10^{11}$ |     | $\Omega$  |


Device is considered a two terminal device : pins 1 and 2 are shorted together and pins 3 and 4 are shorted together.

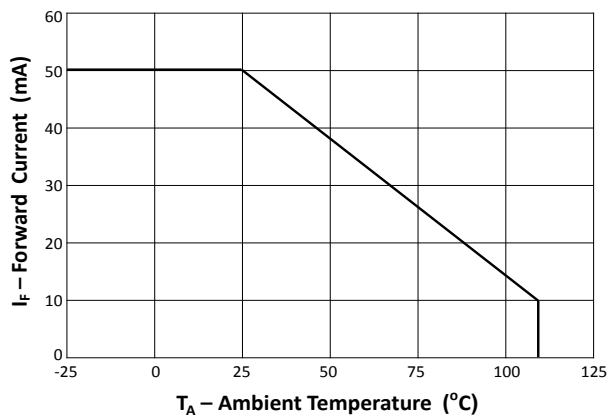


**Fig 1 Forward Current vs Ambient Temperature**

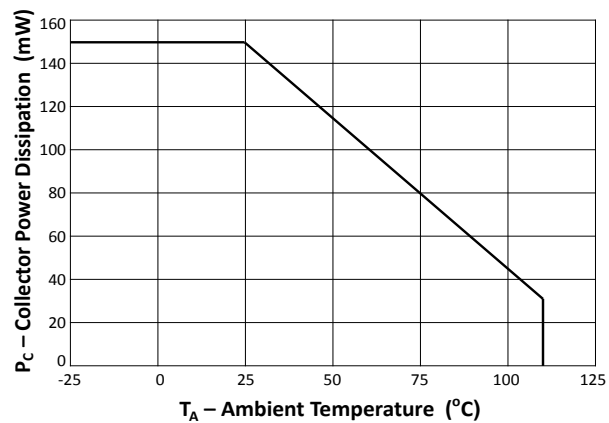


**Fig 2 Collector Power vs Ambient Temperature**

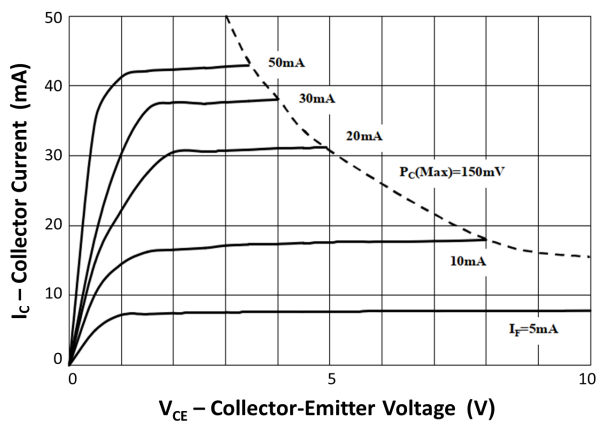


**Fig 3 Collector Current vs Collector-Emitter Voltage (1)**

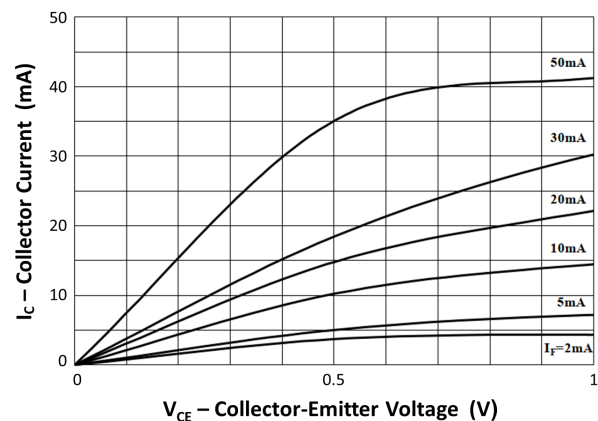


**Fig 4 Collector Current vs Collector-Emitter Voltage (2)**

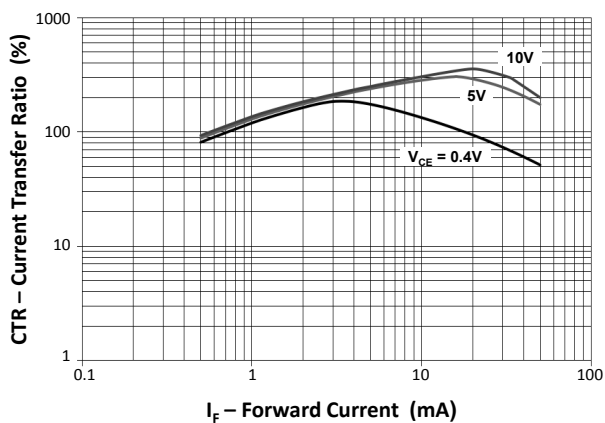


**Fig 5 Current Transfer Ratio vs Forward Current**

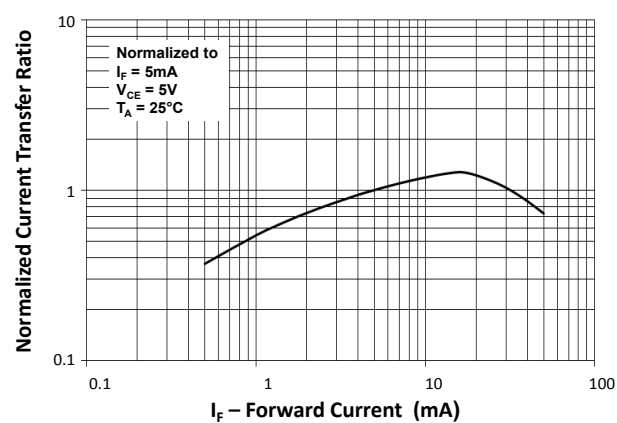


**Fig 6 Normalized Current Transfer Ratio vs Forward Current**

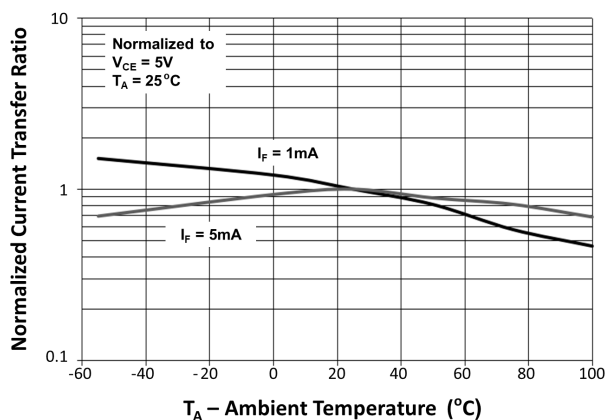


**Fig 7 Normalized Current Transfer Ratio vs Ambient Temperature**

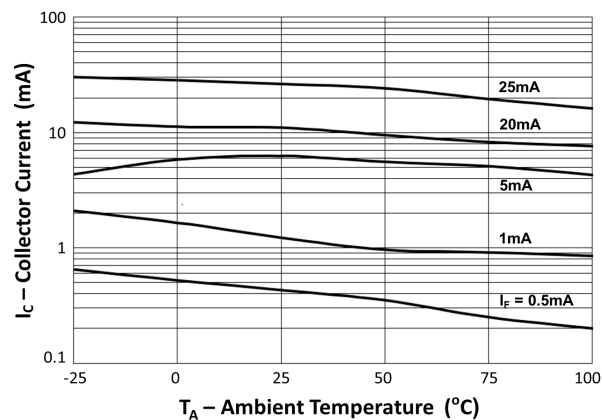


**Fig 8 Collector Current vs Ambient Temperature**

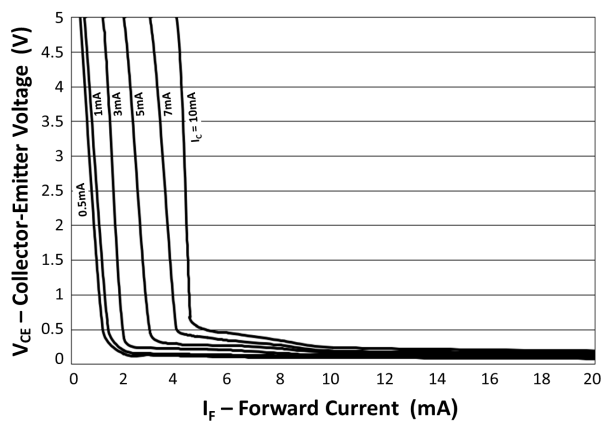


**Fig 9 Collector-Emitter Voltage vs Forward Current**

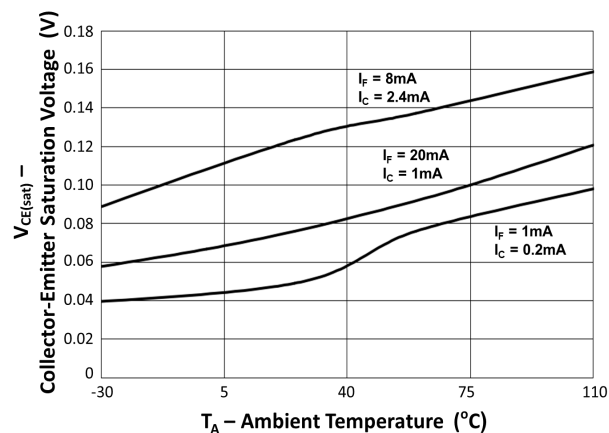

**Fig 10 Collector-Emitter Saturation Voltage vs Ambient temperature**

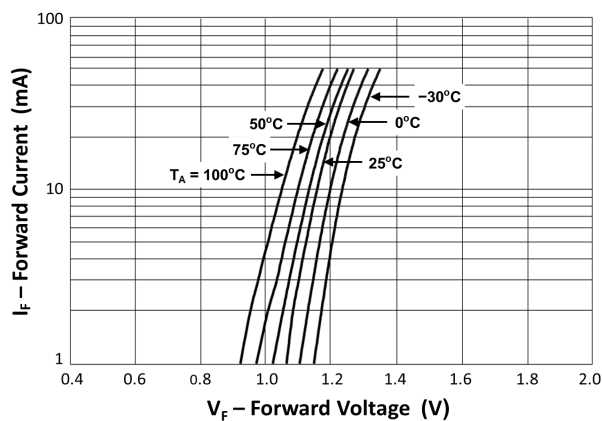

**Fig 11 Forward Current vs Forward Voltage**

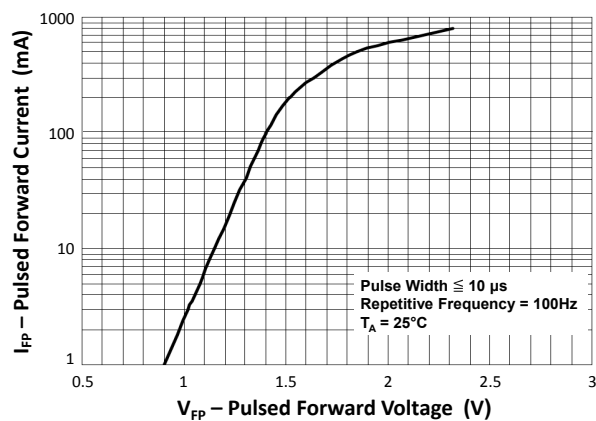

**Fig 12 Pulsed Forward Current vs Pulsed Forward Voltage**



## ISP281

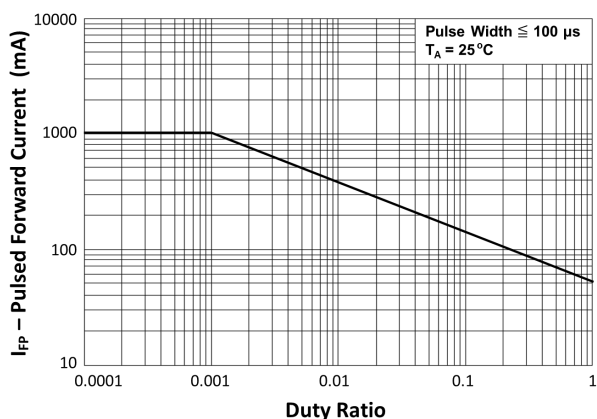


Fig 13 Pulsed Forward Current vs Duty Ratio

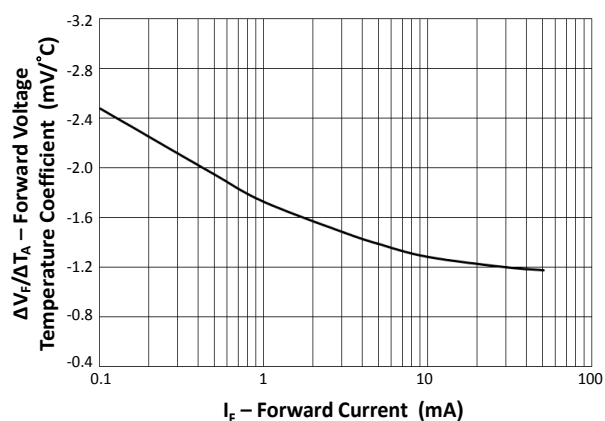


Fig 14 Forward Voltage Temperature Coefficient vs Forward Current

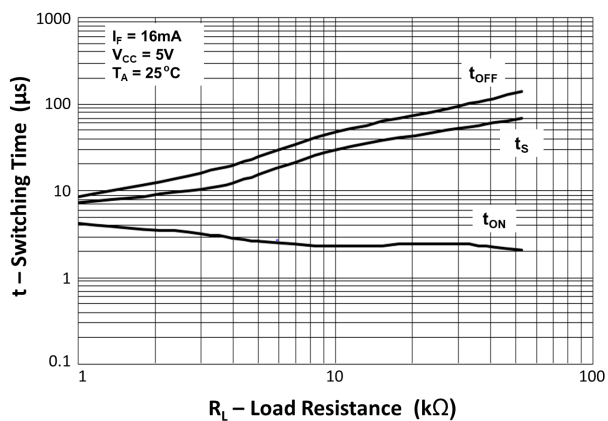


Fig 15 Switching Time vs Load Resistance

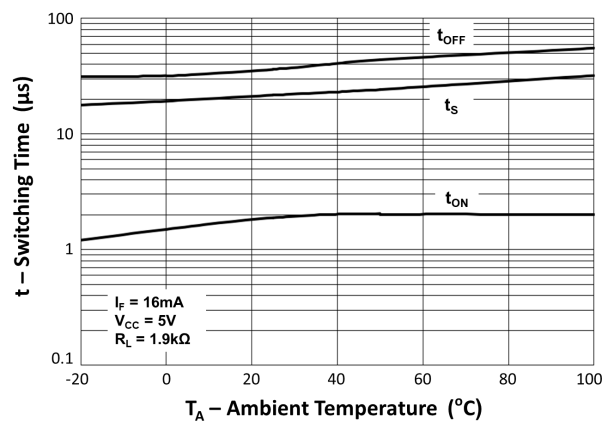


Fig 16 Switching Time vs Ambient temperature

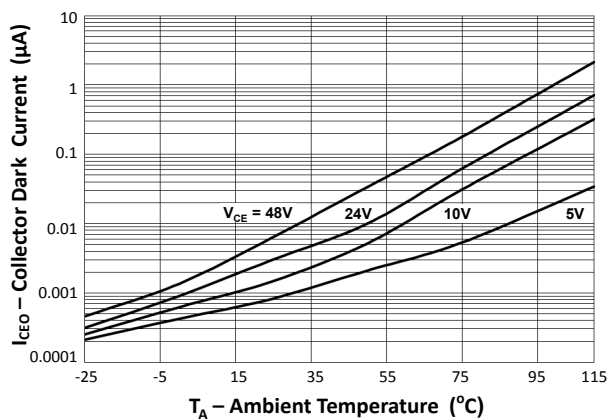


Fig 17 Collector Dark Current vs Ambient Temperature


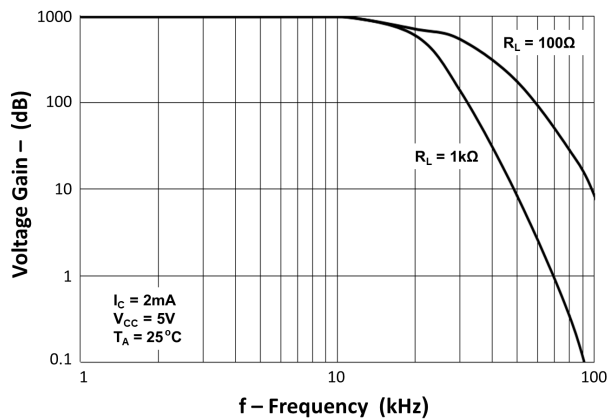


Fig 18 Frequency Response



## ISP281

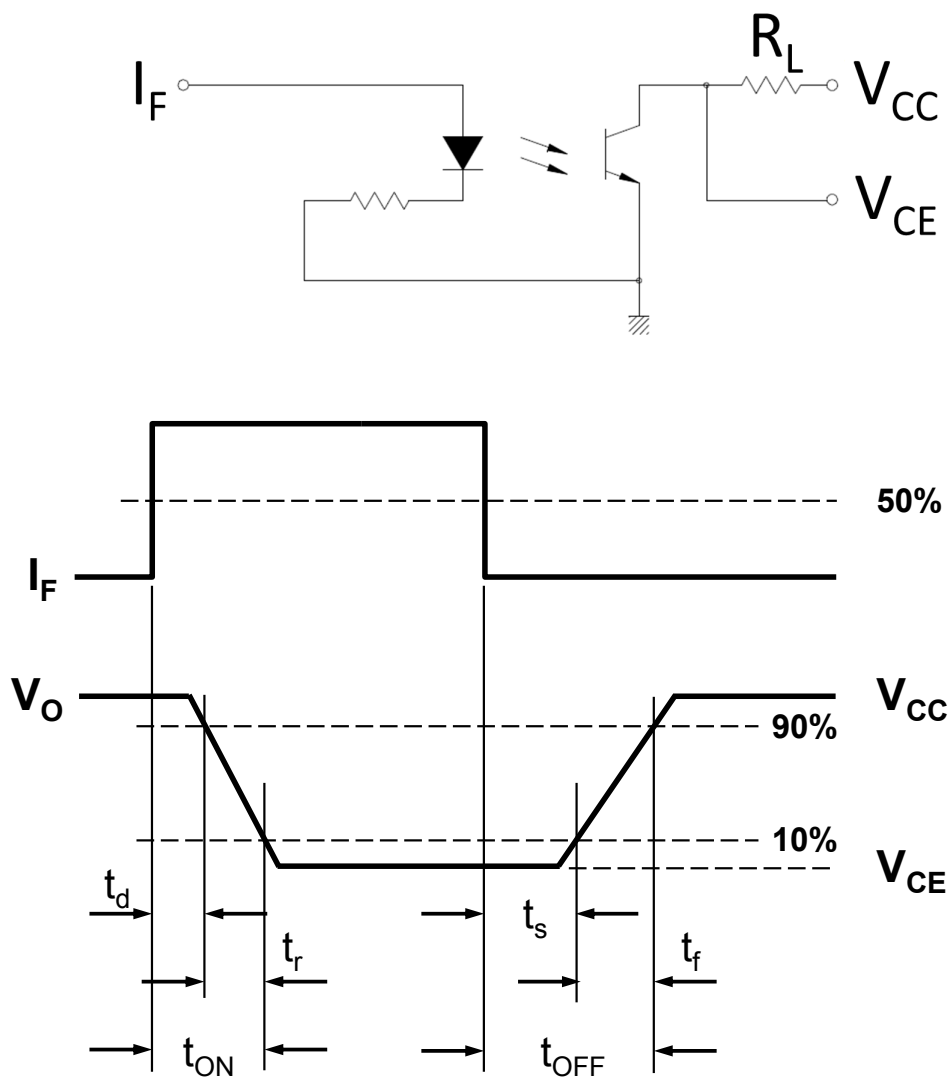


Switching Time Test Circuit and Waveform

## ISP281

### ORDER INFORMATION

| ISP281                                                                     |                                                                     |                             |                   |
|----------------------------------------------------------------------------|---------------------------------------------------------------------|-----------------------------|-------------------|
| After PN                                                                   | PN                                                                  | Description                 | Packing quantity  |
| None                                                                       | ISP281                                                              | Surface Mount Tape and Reel | 3000 pcs per reel |
| Any CTR Grades                                                             | ISP281A, ISP281B, ISP281C<br>ISP281D, ISP281E<br>ISP281GR, ISP281GB | Surface Mount Tape and Reel | 3000 pcs per reel |
| NOTE : Multiple Grades may be supplied to meet the requested specification |                                                                     |                             |                   |

### DEVICE MARKING

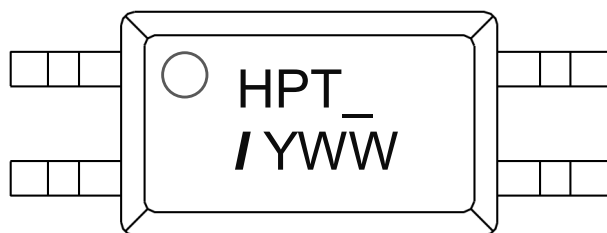


HPT\_ denotes Device Part Number where “\_” denotes CTR Grade  
 / denotes Isocom  
 Y denotes 1 digit Year code J = 2019, K = 2020 etc.  
 WW denotes 2 digit Week code






## ISP281

### PACKAGE DIMENSIONS in mm

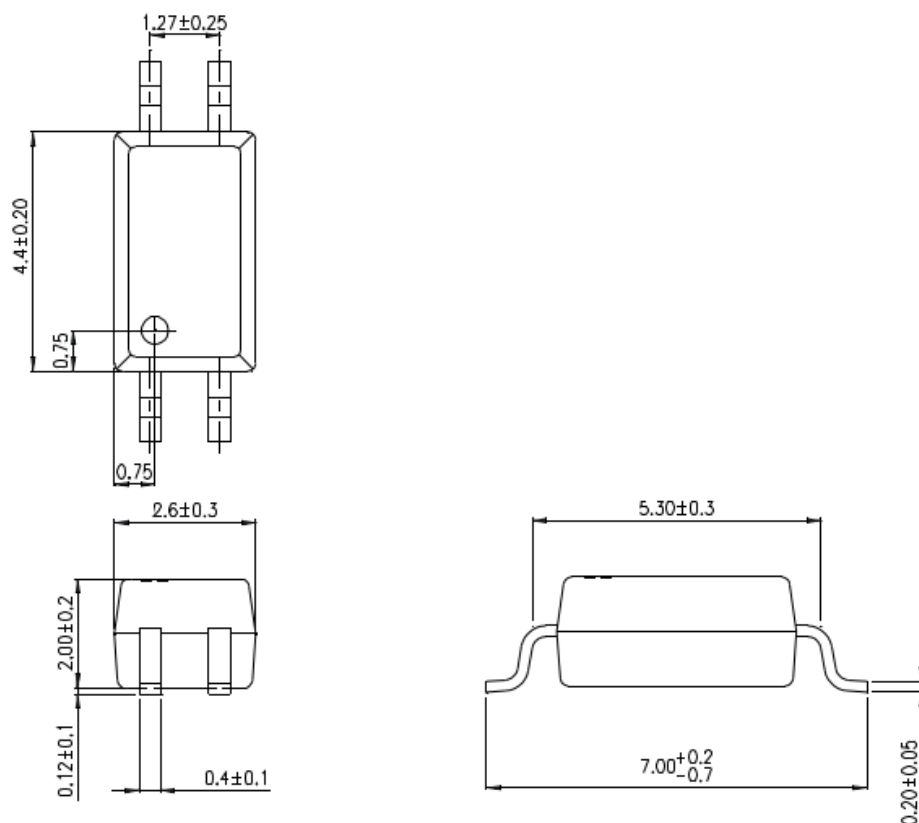


### RECOMMENDED PAD LAYOUT FOR SMD (mm)

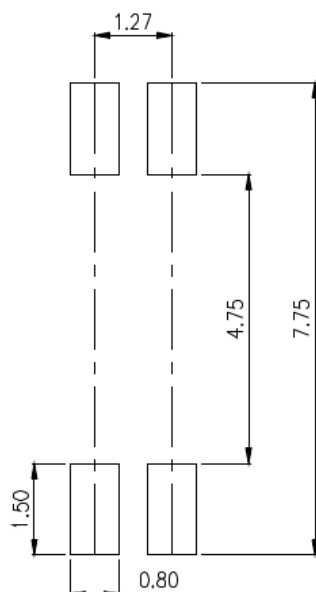

## ISP281

### TAPE AND REEL PACKAGING (mm)

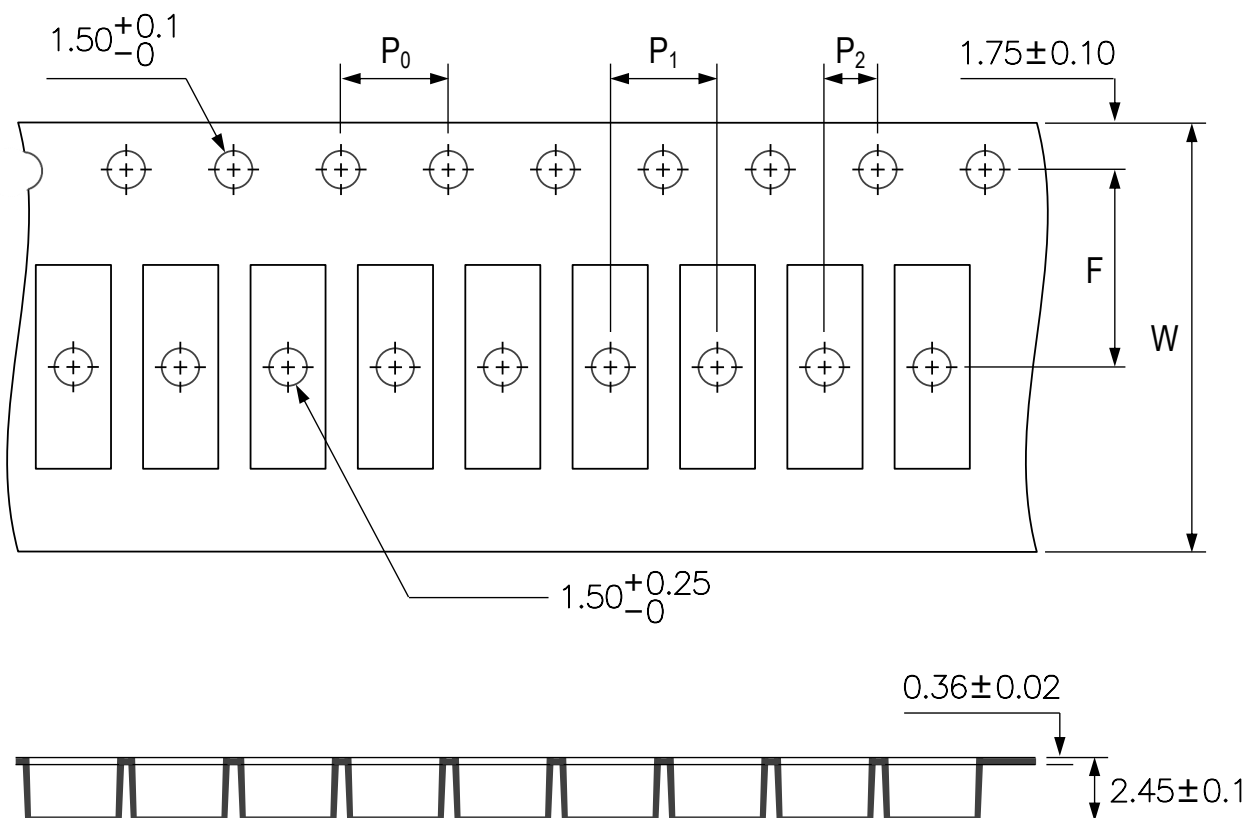

| Description                               | Symbol | Dimension<br>mm (inch)  |
|-------------------------------------------|--------|-------------------------|
| Tape Width                                | W      | $16.00 \pm 0.30$ (0.63) |
| Pitch of Sprocket Holes                   | $P_0$  | $4.00 \pm 0.10$ (0.16)  |
| Distance of Compartment to Sprocket Holes | F      | $7.50 \pm 0.10$ (0.30)  |
|                                           | $P_2$  | $2.00 \pm 0.05$ (0.079) |
| Distance of Compartment to Compartment    | $P_1$  | $4.00 \pm 0.10$ (0.16)  |




## ISP281

### IR REFLOW SOLDERING TEMPERATURE PROFILE

One Time Reflow Soldering is Recommended.

Do not immerse device body in solder paste.

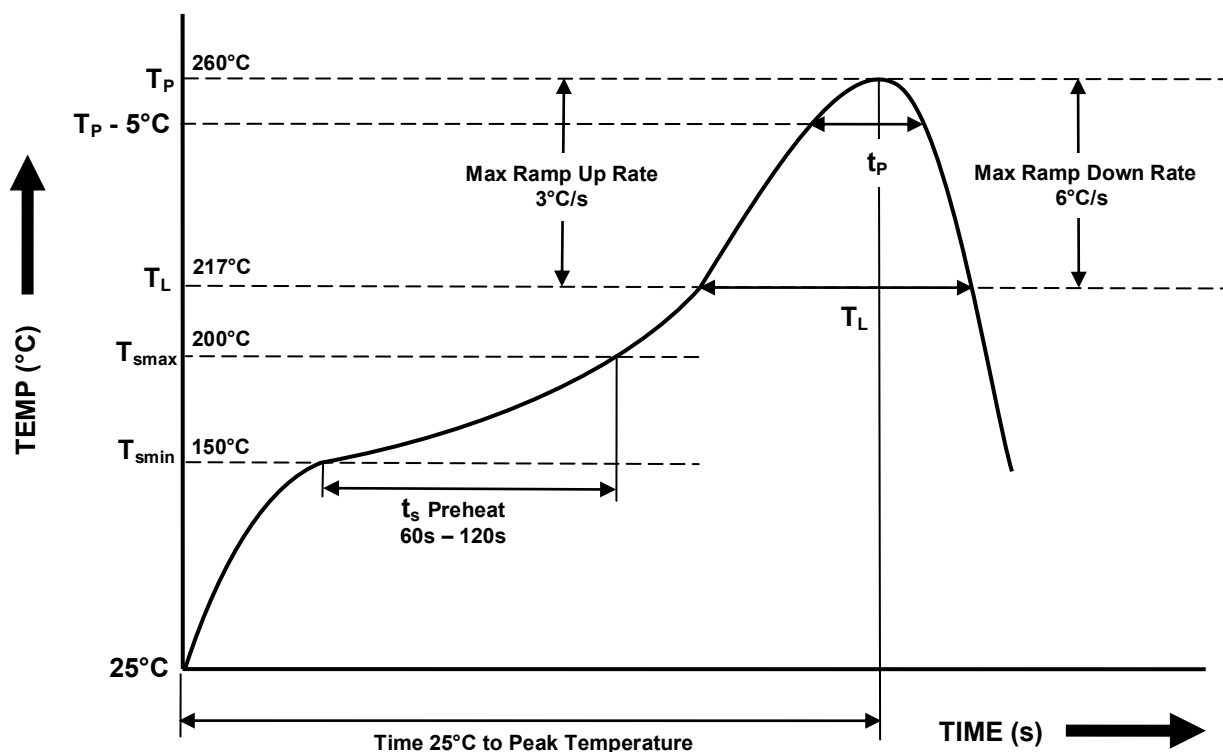

| Profile Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Conditions                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| <b>Preheat</b> <ul style="list-style-type: none"><li>- Min Temperature (<math>T_{SMIN}</math>)</li><li>- Max Temperature (<math>T_{SMAX}</math>)</li><li>- Time <math>T_{SMIN}</math> to <math>T_{SMAX}</math> (<math>t_s</math>)</li></ul>                                                                                                                                                                                                                                                   | 150°C<br>200°C<br>60s - 120s                                                 |
| <b>Soldering Zone</b> <ul style="list-style-type: none"><li>- Peak Temperature (<math>T_P</math>)</li><li>- Time at Peak Temperature</li><li>- Liquidous Temperature (<math>T_L</math>)</li><li>- Time within 5°C of Actual Peak Temperature (<math>T_P - 5^\circ\text{C}</math>)</li><li>- Time maintained above <math>T_L</math> (<math>t_L</math>)</li><li>- Ramp Up Rate (<math>T_L</math> to <math>T_P</math>)</li><li>- Ramp Down Rate (<math>T_P</math> to <math>T_L</math>)</li></ul> | 260°C<br>10s max<br>217°C<br>30s max<br>60s - 100s<br>3°C/s max<br>6°C/s max |
| Average Ramp Up Rate ( $T_{smax}$ to $T_P$ )                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 3°C/s max                                                                    |
| Time 25°C to Peak Temperature                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 8 minutes max                                                                |

## DISCLAIMER

Isocom Components is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing Isocom Components products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such Isocom Components products could cause loss of human life, bodily injury or damage to property.

In developing your designs, please ensure that Isocom Components products are used within specified operating ranges as set forth in the most recent Isocom Components products specifications.

The Isocom Components products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These Isocom Components products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation Instruments, traffic signal instruments, combustion control instruments, medical Instruments, all types of safety devices, etc... Unintended Usage of Isocom Components products listed in this document shall be made at the customer's own risk.

Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.

The products described in this document are subject to the foreign exchange and foreign trade laws.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Isocom Components for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of Isocom Components or others.

The information contained herein is subject to change without notice.