

PART NO. AND CH. CODE	W ₁ ±0.4	W ₂ ±0.4	H ₁	H ₂	A	B	WIRE SIZE
7116-4052-08.Ⅱ (7B16-4052-08.Ⅱ)	2.30	3.60	(2.19)	(3.19)	3.00	6.20	AVSS 0.3~AVS 0.5 EQUIVALENT
7116-4053-08.Ⅱ (7B16-4053-08.Ⅱ)	3.00	4.50	(2.91)	(3.89)	4.00	7.20	AVS 0.5~AVS 1.25 EQUIVALENT

注記

△ 1. 嵌合相手品番：7114-4052-08 ETC. (7B14-4052-08 ETC.)

△ 2. 材質：C2600 t=0.25

△ 如理：ニッケル下地めっき

△ 金めっき

△ 金フラッシュめっき

△ 編めっき

△ 3. () 内品番は、エアバッグ (A/B) 回路及び安全管理回路に使用する時に適用すること。

NOTES

△ 1. MATING PART NO. : 7114-4052-08 ETC.

(7B14-4052-08 ETC.)

△ 2. MATERIAL : C2600 t=0.25

TREATMENT : NICKEL UNDER PLATING

△ GOLD PLATING

GOLD FLASH PLATING

TIN PLATING


△ 3. PART NUMBERS IN PARENTHESIS SHALL

BE USED FOR AIR BAG (A/B) CIRCUITS


AND OTHER CIRCUITS DESIGNATED

FOR SPECIAL MONITORING.





△ 01.06.07	CHANGED PART NAME & FORM. Ⅱ	C01-X545	A. T
△ 01.01.29	CHANGED PLATING. Ⅱ	C01-X033	E. F
△ 98.07.18	CHANGED NOTE & DIMENSION	C97-N454	H. K
△ 97.09.12	CHANGED PLATING. Ⅲ	C97-M928	H. K
△ 97.07.01	CHANGED FORM. Ⅱ	C97-M318	H. K
△ 96.01.19	ADDED A/B PART NO. Ⅱ	C96-L133	M. T
△ 93.08.18	CHANGED FORM	C93-L882	H. F
△ 92.03.12	CORRECTED AN ERROR IN WRITING	C92-6321	H. K
△ 92.03.10	NEW	C92-6279	H. K
LET	DATE	NO.	CHKD
GENERAL TOLERANCE			
10MAX	50MAX	100MAX	2500VR
A ±0.15	±0.2	±0.3	±0.75
B ±0.2	±0.3	±0.55	±1.4
(C) ±0.3	±0.5	±0.8	±2
SPECIFIED			
MASS			
g			



SEC. D-D



SEC. C-C

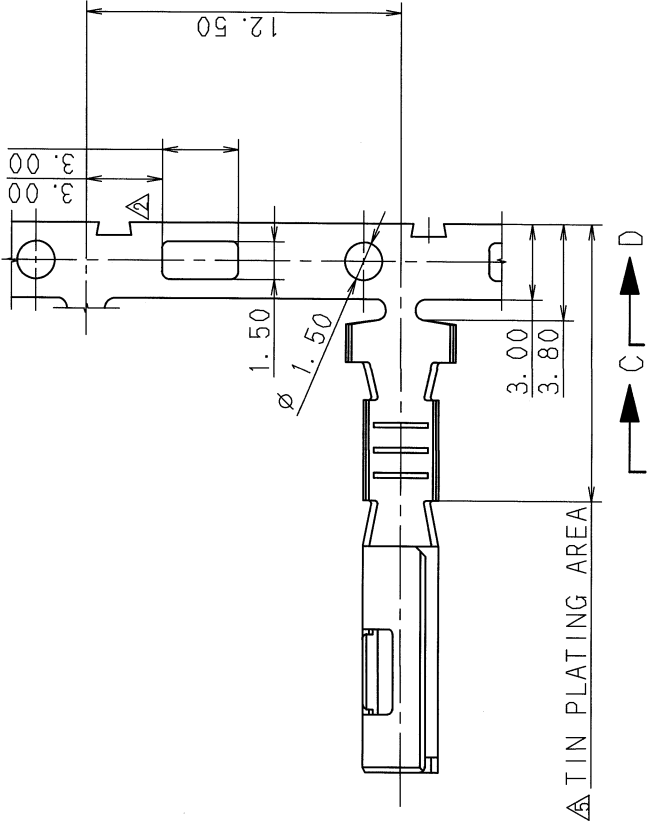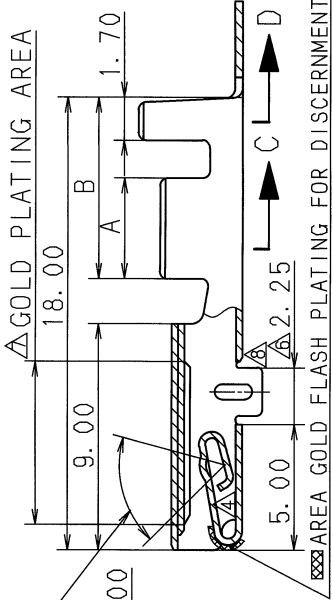

CUSTOMER	CUSTOMER PART NO.	CUSTOMER DWG NO.	MAT'L SPEC.	SEE NOTES	TREAT. & FIN.	SEE NOTES	ISSUE MARK
OFFICE							
VENDOR							
VENDOR NO.							
DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.	CH. CODE
R	NEW	92.03.03	m	5/1	3	7116-4052-08 ETC.	(7B16-4052-08 ETC.)
APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		DWG NO.	SET DWG NO.
加藤 山梨	山梨	12	A. MAEDA	OHKUBO		7116-4052-08 : R	
01.06.14	01.06.12	01.06.11	90.10.18	01.06.07		YAZAKI CORPORATION	