

F


E

D

C

B

A

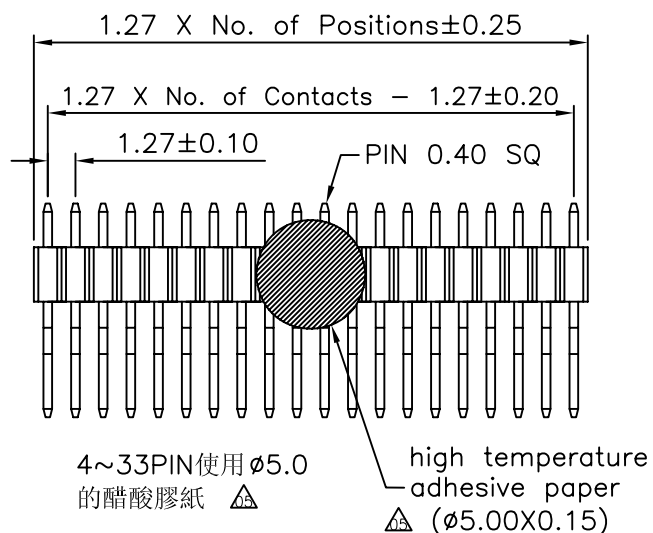

Ordering Information


G PED201-XX XX A001 C 1 B X

No. of Pins per Row
02~33



Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin

Standard Packing
H=Tape Reel+Film
Selective Packing
C=Tube
G=Tube+Film
F=Tape Reel+cap


2~3PIN使用φ3.0
的醋酸膠紙



high temperature
adhesive paper
(φ3.00X0.15)

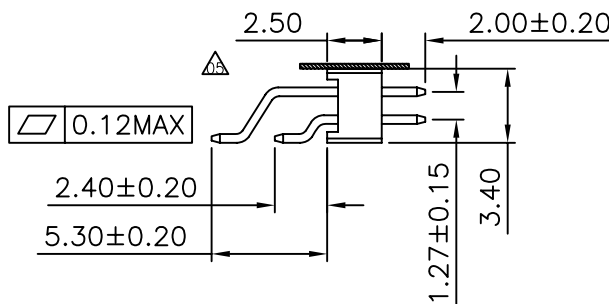

Recommended P.C.Board Layout
(Tolerance: ±0.05)

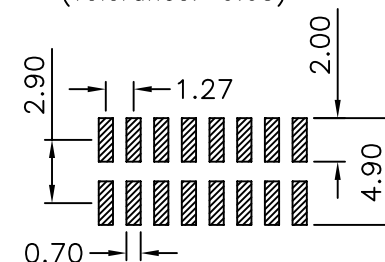

REV.	LOCAS	DESCRIPTION	DATE	DRAWN
02		03~40PINS-->02~33PINS	08-11-05	XIAO PING
03		變更料號	2008.10.06	彭思城
04		變更圖號並修改注解	2011.05.30	黃明霞
05		產品新增加醋酸膠紙	2012.01.11	左國強
06		增加CAP圖面	2013.09.20	楊濤

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩMin.

Dielectric Withstanding: 300VAC

Contact Resistance: 20mΩMax.

Operating Temperature: -40°C to +105°C
Materials

Contact Material: Brass

Insulator Material: High Temperature
Thermoplastic, UL 94V-0 LCP
or the equivalent material

All materials must meet Greenconn
requirement for environment protection.

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X. ±5.0°	X. ±0.30
.X. ±3.0°	.X. ±0.25
.XX. ±2.0°	.XX. ±0.15
.XXX. ±1.0°	.XXX. ±0.10

DESIGN: 楊濤

DATE: 2013.09.20

DWG. NO.
GPED201-CA1CB

TITLE.

1.27 PIN HEADER
DUAL ROWS SMT TYPE
SIDE ENTRY

CHECKED: 林澤雲

DATE: 2013.09.20

PART NO.
GPED201-XXXXA001C1BX

AUDITED: LINK

DATE: 2013.09.20

REV.	UNIT.	SCALE.	PAGE.
06	mm	1:1	1/1