
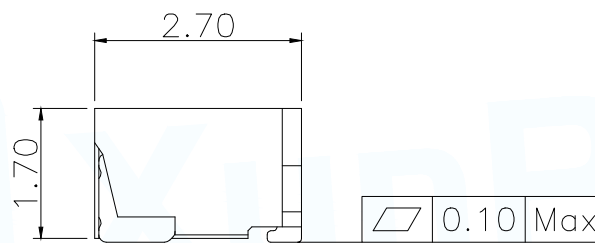


3D View

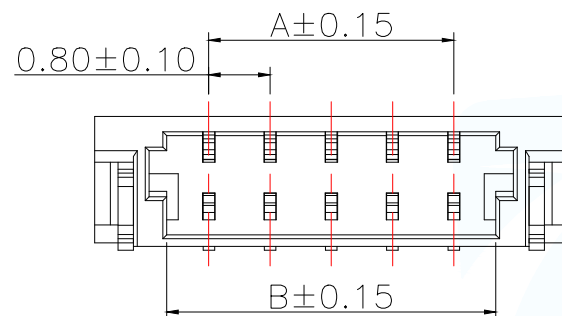

P/N	Dimensions(mm)		
	A	B	C
WAFER-M0.8-2PWB	0.80	1.90	3.78
WAFER-M0.8-3PWB	1.60	2.70	4.58
WAFER-M0.8-4PWB	2.40	3.50	5.38
WAFER-M0.8-5PWB	3.20	4.30	6.18
WAFER-M0.8-6PWB	4.00	5.10	6.98
WAFER-M0.8-7PWB	4.80	5.90	7.78
WAFER-M0.8-8PWB	5.60	6.70	8.58
WAFER-M0.8-9PWB	6.40	7.50	9.38
WAFER-M0.8-10PWB	7.20	8.30	10.18
WAFER-M0.8-11PWB	8.00	9.10	10.98
WAFER-M0.8-12PWB	8.80	9.90	11.78
WAFER-M0.8-13PWB	9.60	10.70	12.58
WAFER-M0.8-14PWB	10.40	11.50	13.38
WAFER-M0.8-15PWB	11.20	12.30	14.18
WAFER-M0.8-16PWB	12.00	13.10	14.98
WAFER-M0.8-17PWB	12.80	13.90	15.78
WAFER-M0.8-18PWB	13.60	14.70	16.58
WAFER-M0.8-19PWB	14.40	15.50	17.38
WAFER-M0.8-20PWB	15.20	16.30	18.18

Specification


Voltage Rating : 30V AC/DC

Current Rating : 0.5A AC/DC

Withstanding Voltage : 200V AC /minute

Insulation Resistance : $\geq 100\text{M}\Omega$ minTemperature Range : -40°C to $+105^{\circ}\text{C}$ Contact Resistance : $\leq 20\text{m}\Omega$ After Environmental Testing: $\leq 40\text{m}\Omega$

Suitable Wire/Cable:AWG #28 to #30,OD:0.8mm max

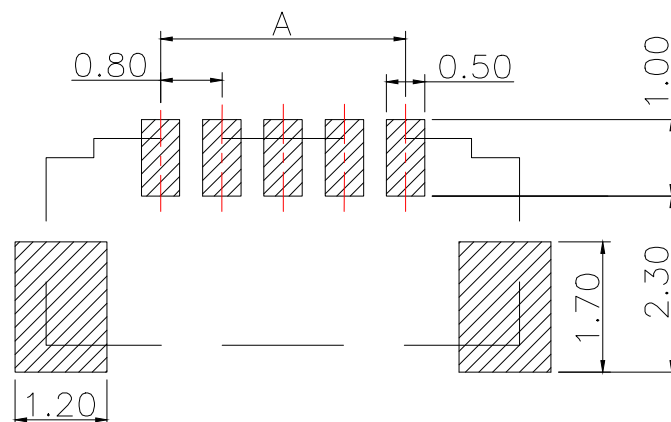Recommended P.C.B Layout
General Tolerance ± 0.05

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:0.8mm(.031") pitch PCB Header/Wafer R/A SMD/SMT
DECIMALS:	ANGLES:		PAR WAFER-M0.8-NPWB
.X:±0.30	±3°		DWN Lucas
.XX:±0.20			CHKD Ethan
.XXX:±0.10			APVD Jacob
CUSTOMER COPY		SCALE:1:1	UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A