

## SPECIFICATIONS

### Mechanical

**Contact Retention Force:** N/A

**Durability :** 25 Cycles

### Electrical

**Voltage Rating:** N/A

**Current Rating:** N/A

**Contact Resistance:** N/A

**Dielectric Withstanding Voltage:** N/A

**Insulation Resistance:** N/A

### Physical

**Cap:** Thermoplastic, UL 94V-0 rated in Ivory Color

**Metal Spring:** Stainless steel

**Plating:** See "ORDERING INFORMATION"

**Operating Temperature:** -40 to +85


## MINI PCI Express Socket

**AS Series**


**4.0mm Height SMT Type**

**0.80mm [.031"] Pitch**

**52 Pos. CLIP**

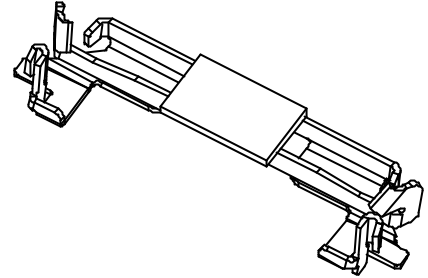

## DRAWING

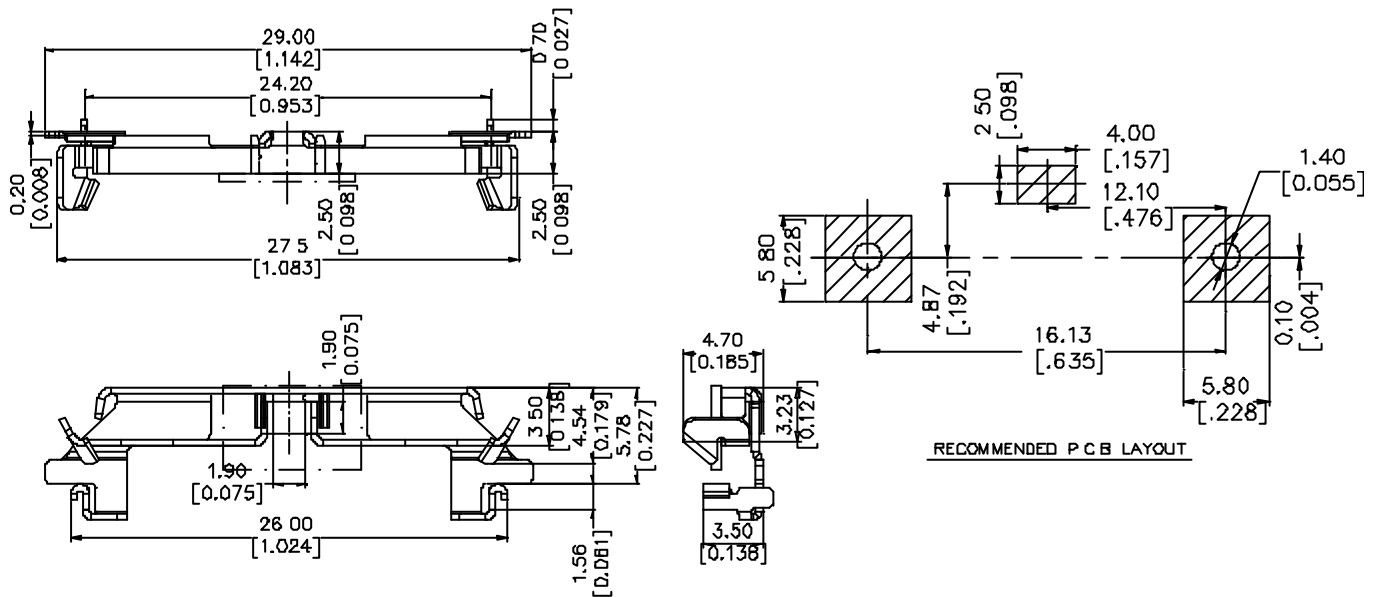

## ORDERING INFORMATION

**PRODUCT NO.:** A S 0 B 2 2 6 - S 40 K - \* F

Memory Module Socket \_\_\_\_\_

Horizontal Type \_\_\_\_\_

Single Row \_\_\_\_\_

No. of Pos. \_\_\_\_\_

B2=52 Pos. \_\_\_\_\_

SMT Type \_\_\_\_\_

Contact Area Plating \_\_\_\_\_

6=10u" Gold \_\_\_\_\_

Lead Free \_\_\_\_\_

4=Soft Tray \_\_\_\_\_

7=Tape Reel \_\_\_\_\_

Only Clip \_\_\_\_\_

40=4.0mm Height \_\_\_\_\_

Short Body \_\_\_\_\_