
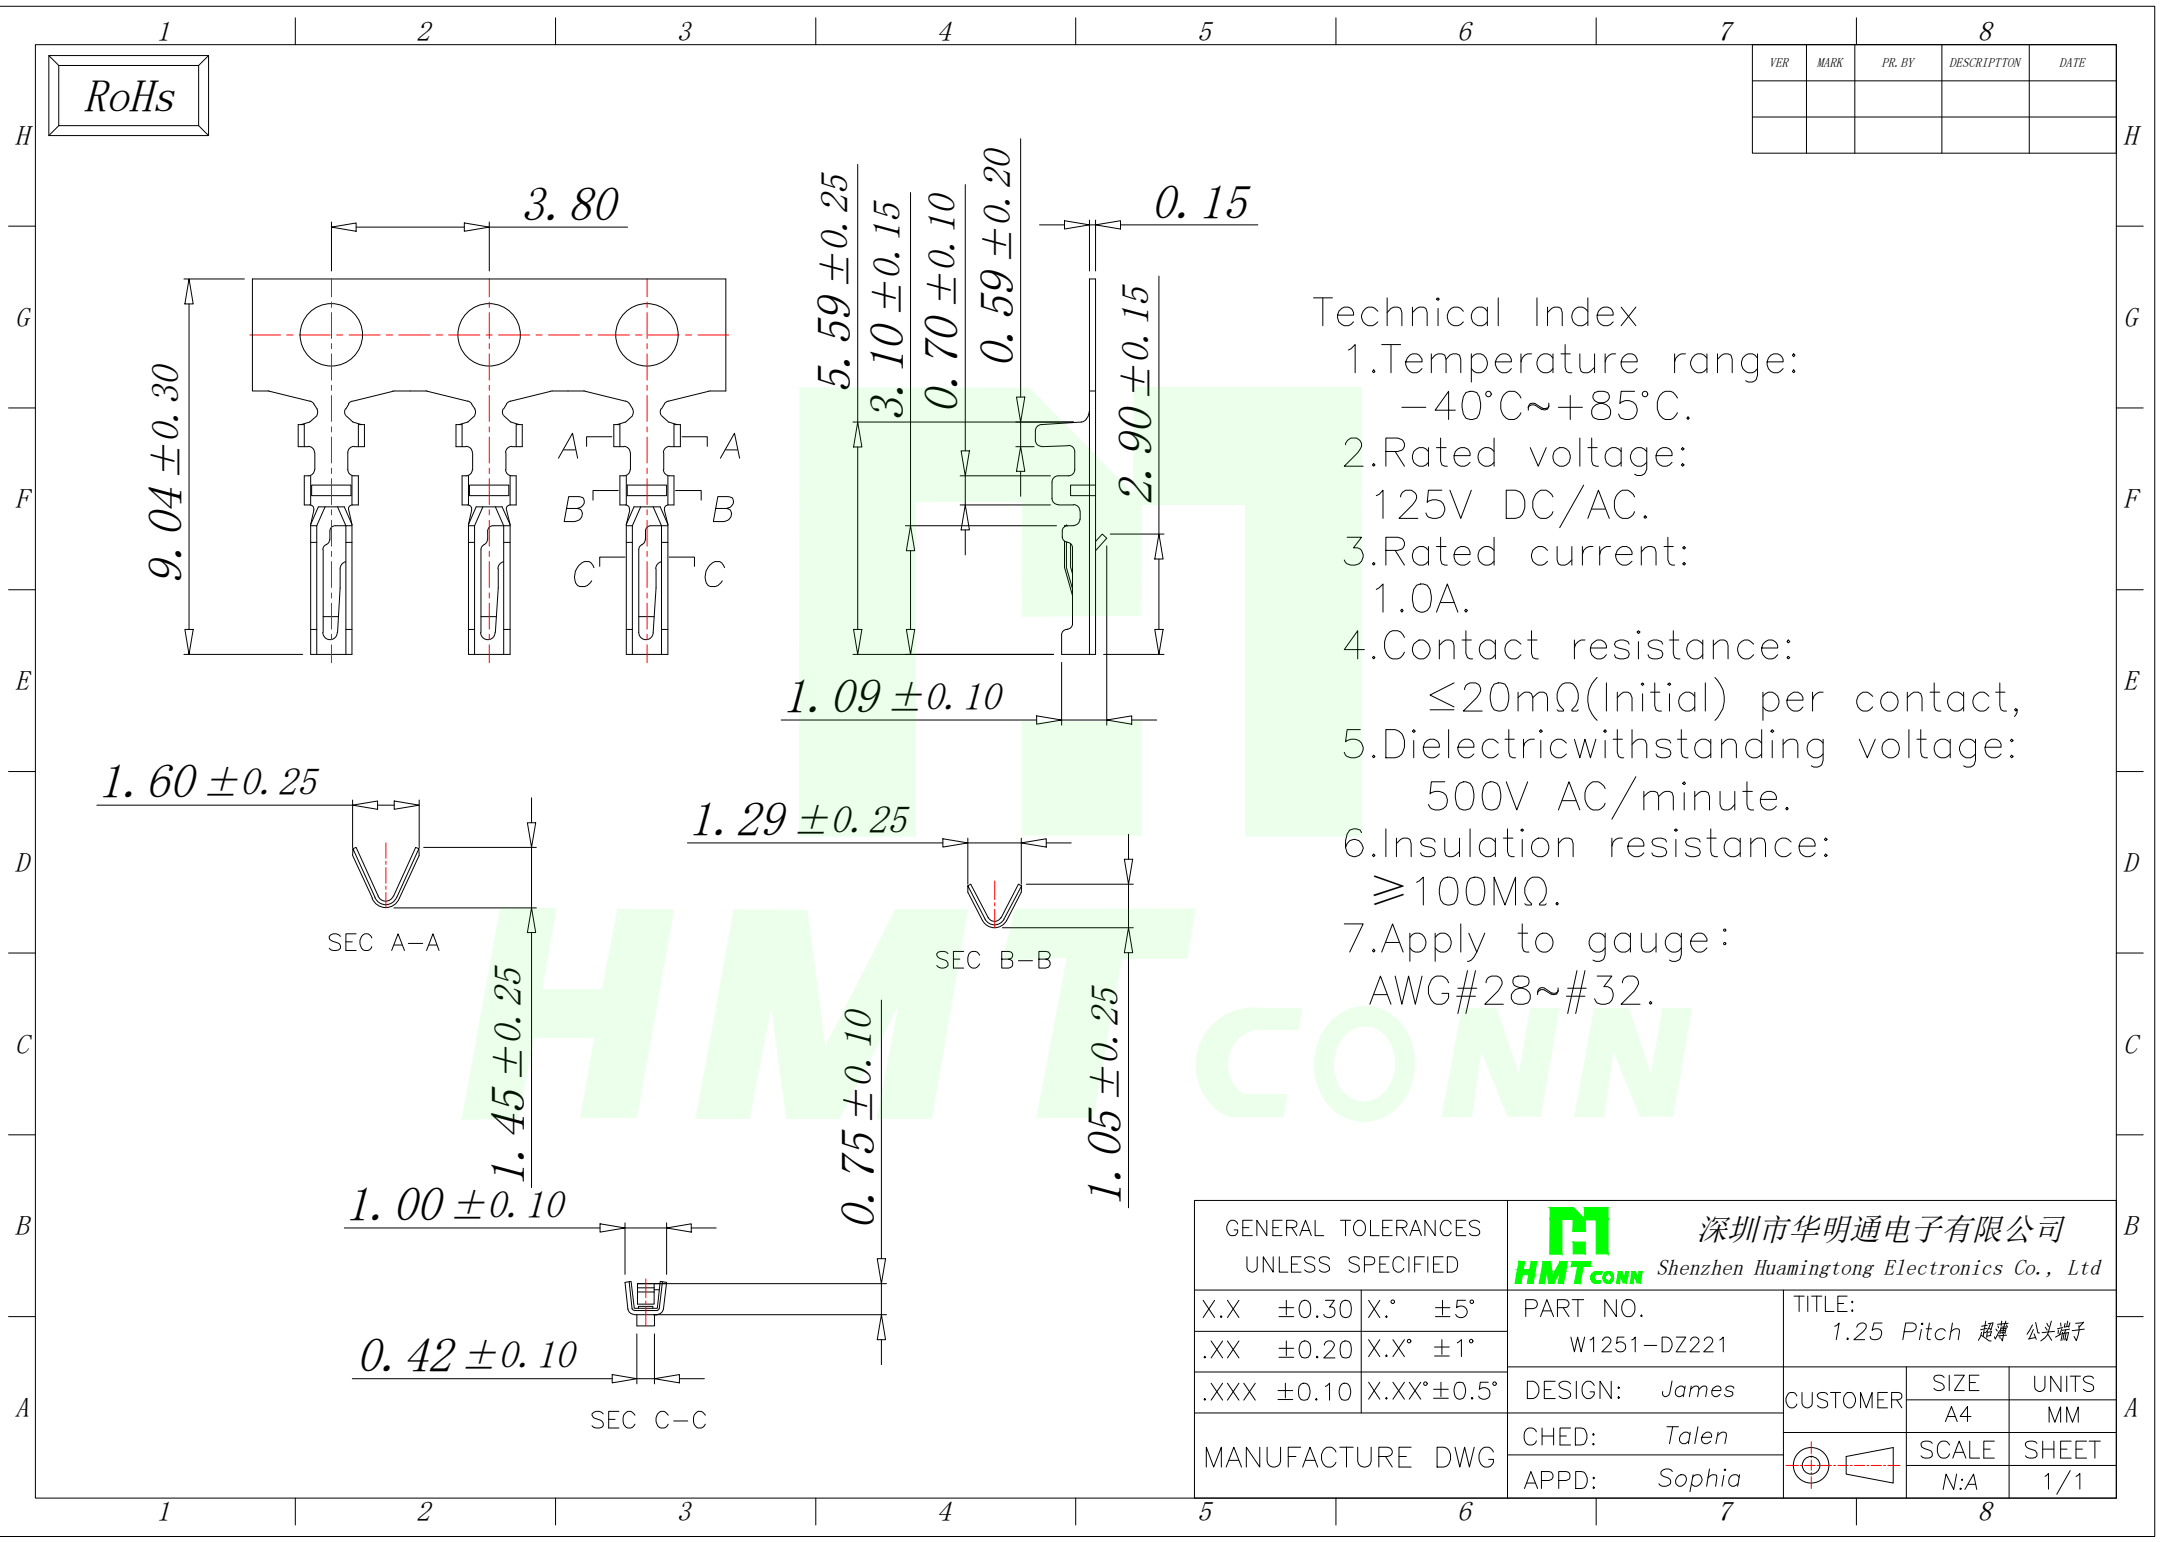




Technical Index

- 1. Temperature range:
-40°C~+85°C.
- 2. Rated voltage:
125V DC/AC.
- 3. Rated current:
1.0A.
- 4. Contact resistance:
≤20mΩ(Initial) per contact,
- 5. Dielectric withstanding voltage:
500V AC/minute.
- 6. Insulation resistance:
≥100MΩ.
- 7. Apply to gauge:
AWG#28~#32.

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd			
X.X ±0.30	X.° ±5°	PART NO. W1251-DZ221		TITLE: 1.25 Pitch 超薄 公头端子	
.XX ±0.20	X.X° ±1°				
.XXX ±0.10	X.XX° ±0.5°	DESIGN: James	CUSTOMER	SIZE	UNITS
MANUFACTURE DWG		CHED: Talen		A4	MM
		APPD: Sophia			SCALE
				N:A	1/1