

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
30V	1.9mΩ@10V	100A
	3mΩ@4.5V	



合肥矽普半导体

Siliup Semiconductor Technology Co., Ltd

技术 品质 服务

www.siliup.com


Feature

- Fast Switching
- Low Gate Charge and Rdson
- Advanced Split Gate Trench Technology
- 100% Single Pulse avalanche energy Test

Applications


- Power switching application
- Battery management
- Uninterruptible power supply

Package

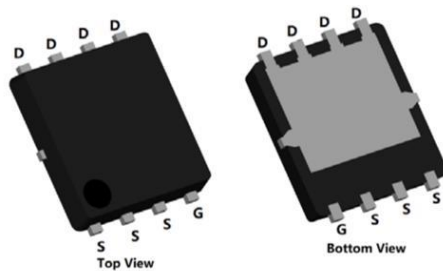


PDFN5X6-8L

Circuit diagram



Marking



SP30N02AGNK :Device Code
** :Week Code

Order Information

Device	Package	Unit/Tape
SP30N02AGNK	PDFN5X6-8L	5000

Absolute maximum ratings (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Rating	Units
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ($T_C=25^\circ\text{C}$)	I_D	100	A
Continuous Drain Current ($T_C=100^\circ\text{C}$)	I_D	66.6	A
Pulsed Drain Current	I_{DM}	400	A
Single Pulse Avalanche Energy ¹	E_{AS}	400	mJ
Power Dissipation ($T_C=25^\circ\text{C}$)	P_D	85	W
Thermal Resistance Junction-to-Case	$R_{\theta JC}$	1.47	$^\circ\text{C/W}$
Storage Temperature Range	T_{STG}	-55 to 150	$^\circ\text{C}$
Operating Junction Temperature Range	T_J	-55 to 150	$^\circ\text{C}$


Electrical characteristics (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	VGS=0V , ID=250uA	30	-	-	V
Drain-Source Leakage Current	IDSS	VDS=24V , VGS=0V , TJ=25℃	-	-	1	uA
Gate-Source Leakage Current	IGSS	VGS=±20V , VDS=0V	-	-	±100	nA
Gate Threshold Voltage	VGS(th)	VGS=VDS , ID =250uA	1.0	1.8	2.5	V
Static Drain-Source On-Resistance	RDS(ON)	VGS=10V , ID=20A	-	1.9	2.5	mΩ
		VGS=4.5V , ID=20A	-	3.0	4.5	
Dynamic characteristics						
Input Capacitance	Ciss	VDS=15V , VGS=0V , f=1MHz	-	2190	-	pF
Output Capacitance	Coss		-	770	-	
Reverse Transfer Capacitance	Crss		-	16	-	
Total Gate Charge	Qg	VDS=15V , VGS=10V , ID=20A	-	36	-	nC
Gate-Source Charge	Qgs		-	6.5	-	
Gate-Drain Charge	Qgd		-	5.5	-	
Switching Characteristics						
Turn-On Delay Time	td(on)	VDD=15V VGS=10V , RG=1.6Ω, ID=20A	-	7	-	nS
Rise Time	tr		-	4.5	-	
Turn-Off Delay Time	td(off)		-	34	-	
Fall Time	tf		-	8	-	
Diode Characteristics						
Diode Forward Voltage	VSD	VGS=0V , IS=1A , TJ=25℃	-	-	1.2	V
Maximum Body-Diode Continuous Current	IS		-	-	100	A
Reverse Recovery Time	Trr	IS=20A, di/dt=100A/us, TJ=25℃	-	43	-	nS
Reverse Recovery Charge	Qrr		-	16	-	nC


Note :

- The EAS test condition is $V_{DD}=15V, V_{GS}=10V, L=0.5mH, R_G=25\Omega$


Typical Characteristics

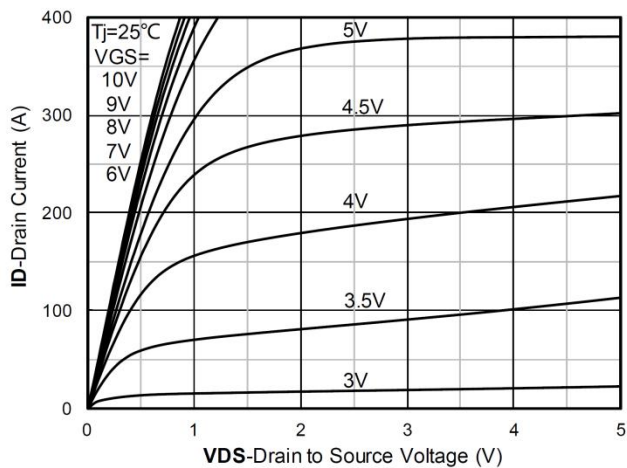


Output Characteristics

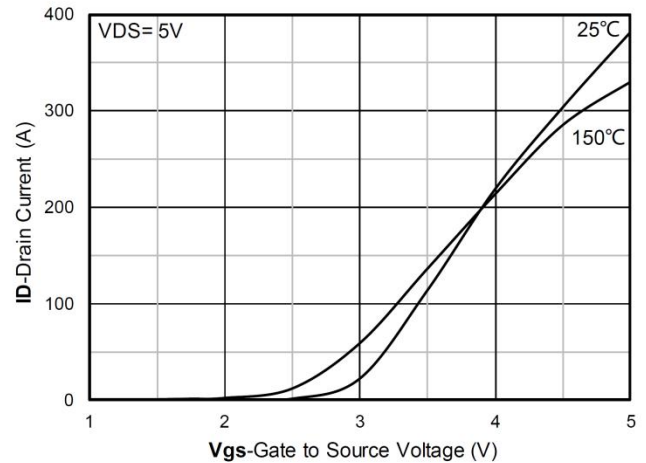


Transfer Characteristics

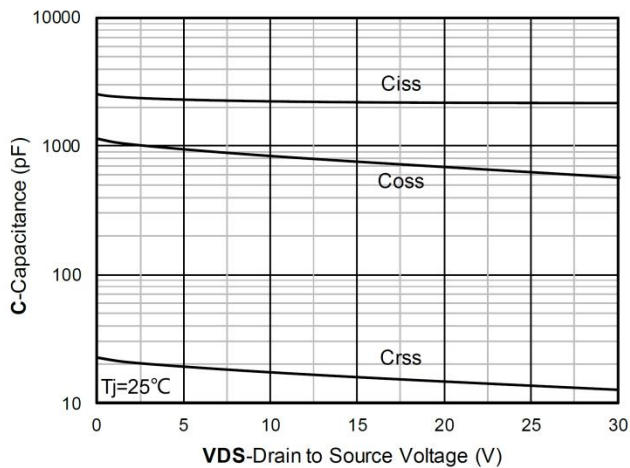


Capacitance Characteristics

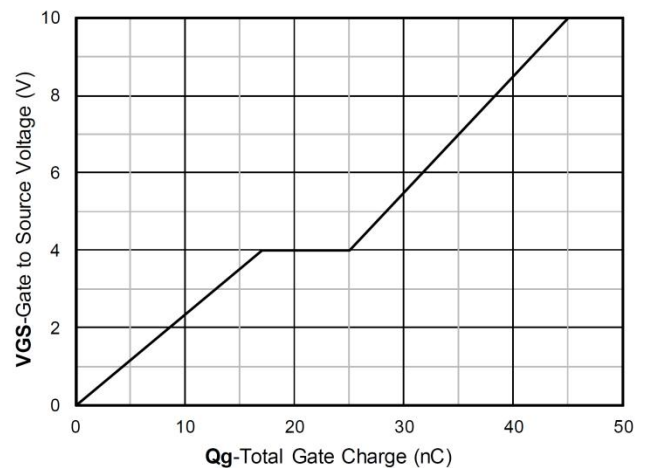


Gate Charge

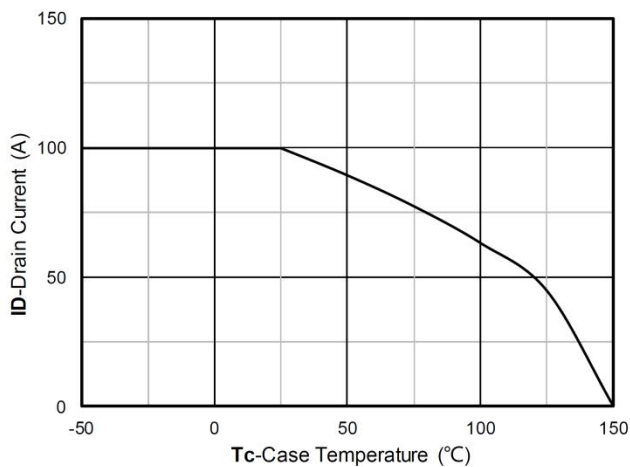


Current dissipation

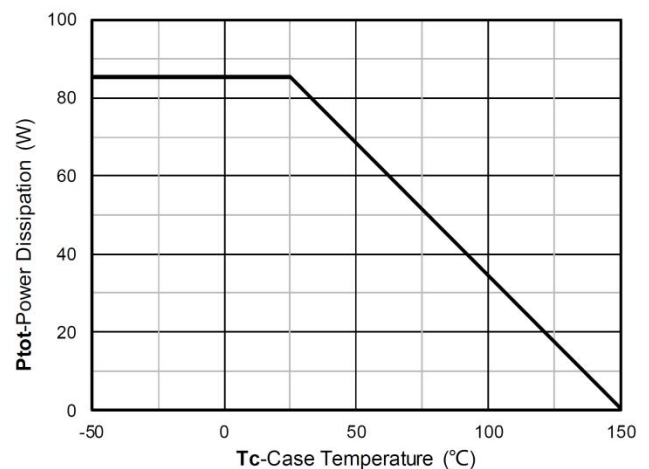


Power dissipation

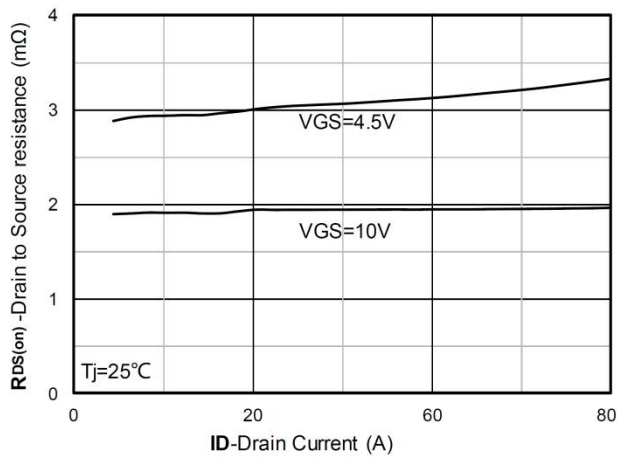


$R_{DS(on)}$ VS Drain Current

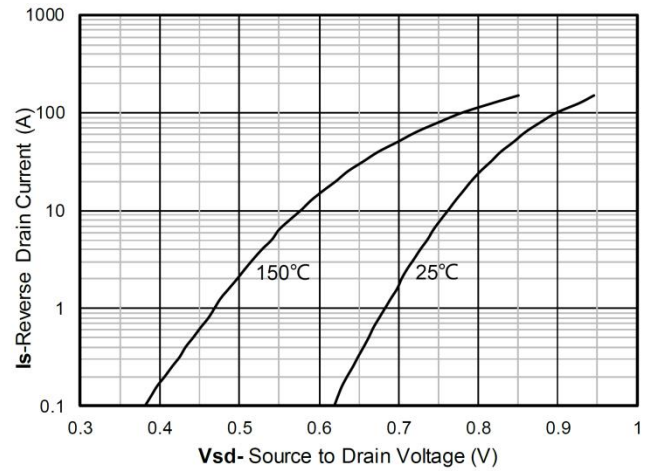


Forward characteristics of reverse diode

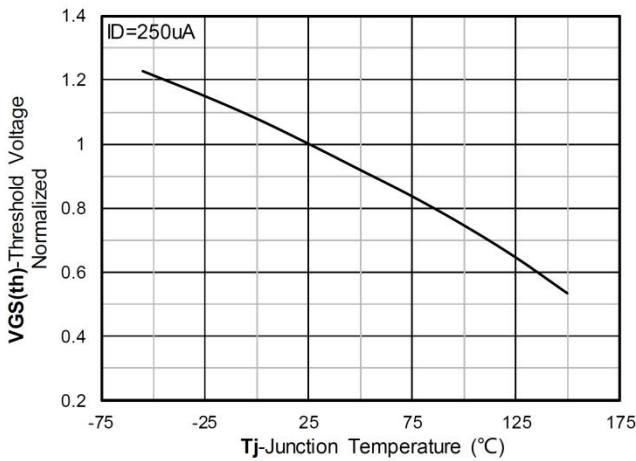


Normalized Threshold voltage

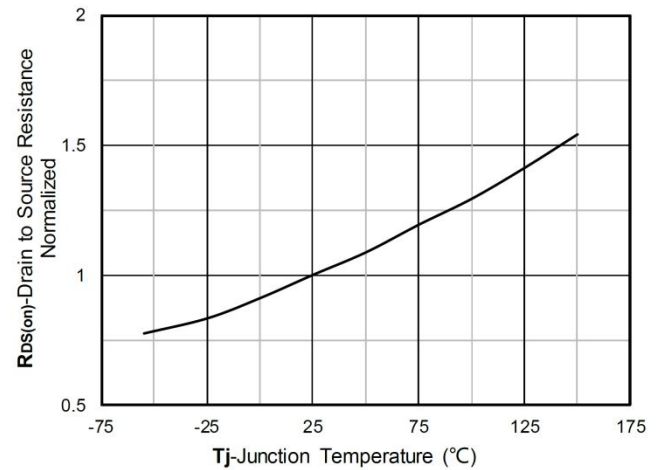

Normalized On-Resistance

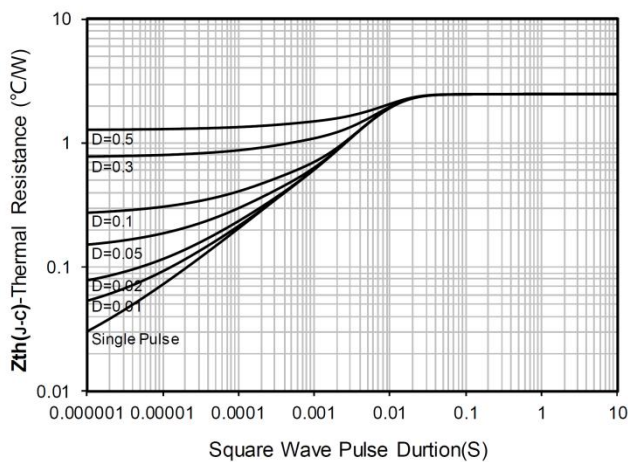


Maximum Transient Thermal Impedance

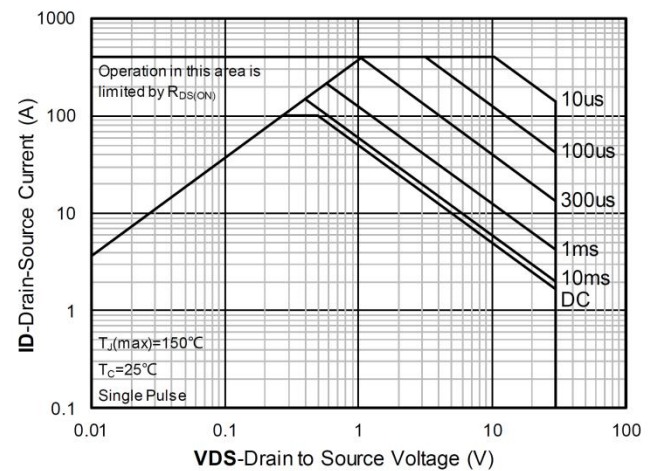


Safe Operation Area


PDFN5X6-8L Package Information

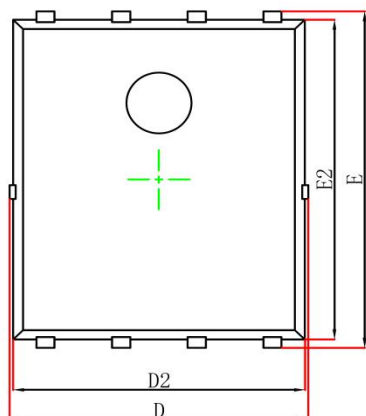

Top View
[顶视图]

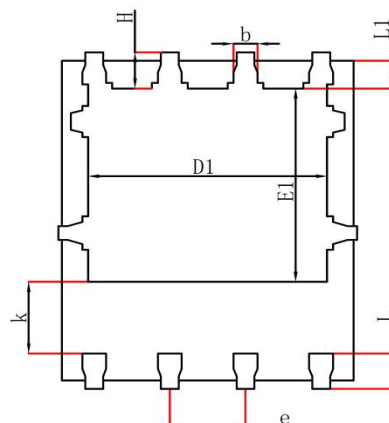

Bottom View
[背视图]

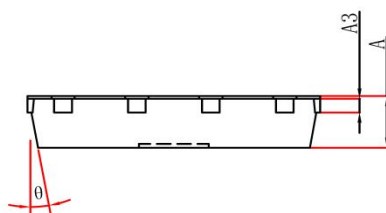

Side View
[侧视图]

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.000	0.035	0.039
A3	0.254REF.		0.010REF.	
D	4.944	5.096	0.195	0.201
E	5.974	6.126	0.235	0.241
D1	3.910	4.110	0.154	0.162
E1	3.375	3.575	0.133	0.141
D2	4.824	4.976	0.190	0.196
E2	5.674	5.826	0.223	0.229
k	1.190	1.390	0.047	0.055
b	0.350	0.450	0.014	0.018
e	1.270TYP.		0.050TYP.	
L	0.559	0.711	0.022	0.028
L1	0.424	0.576	0.017	0.023
H	0.574	0.726	0.023	0.029
θ	10°	12°	10°	12°