
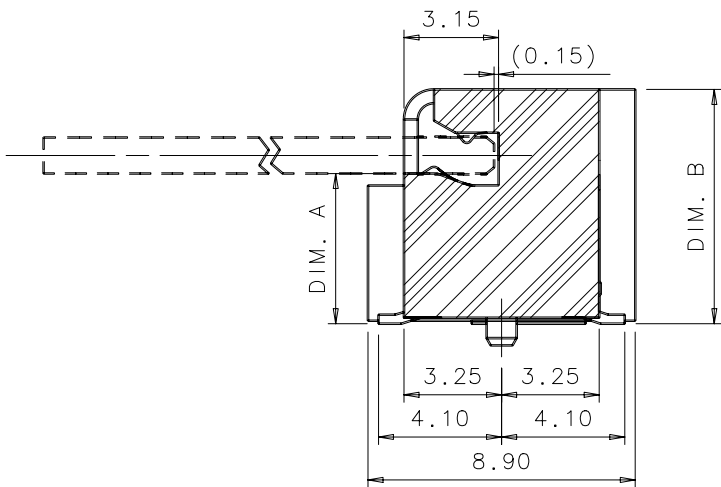
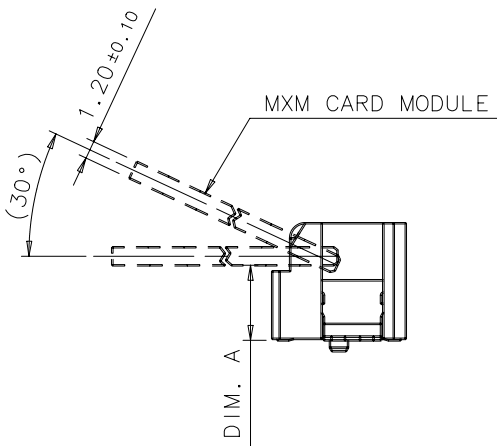



REV.	ECN. NO.	APPD.
A	HC-05-2896	Bruce Wu

- NOTE: UNLESS OTHERWISE SPECIFIED:
- ELECTRICAL CHARACTERISTICS :
 - CONTACT CURRENT RATING : 0.5 AMPERE MAX. PER PIN.
 - VOLTAGE RATING 50V DC PER CONTACT.
 - INSULATION RESISTANCE : 250 MEGAOHMS. MIN. AT 500 VDC.
 - MECHANICAL CHARACTERISTICS :
 - DURABILITY : 25 MATING CYCLES.
 - OPERATION TEMPERATURE : -40°C TO + 85°C
 - INTERPRET DRAWING PER ANSI Y14.5M-1994.

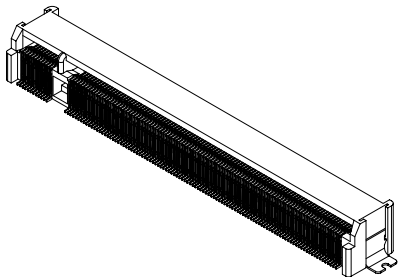

SECTION A-A

DIM. A	DIM. B
1.5	4.3
2.7	5.5
5.0	7.8

X. ± 0.30	X°. ±	UNITS mm	NAME(INTENDED USE) 0.5P. 230POS. MXM CONNECTOR	FOXCONN HON HAI PRECISION IND. CO.,LTD. TAIPEI, TAIWAN, R.O.C.							
.X ± 0.25	.X° ±	MAT'L	PART NO.(INTENDED USE) AS0B326-S78N-7H	TITLE: CUSTOMER DRAWING							
.XX ± 0.15	.XX° ±	FINISH	APPD: Bruce Wu 03/31'05	DWG NO.: 317-0000-1088							
.XXX±	.XXX°±		CHKD: Bruce Wu 03/31'05	 <table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>N/A</td><td>1/2</td><td>A</td></tr></table>			SCALE	SHEET	REV.	N/A	1/2
SCALE	SHEET	REV.									
N/A	1/2	A									
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON HAI PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON HAI PRECISION IND. CO., LTD.		Q'TY	DR:H.L.Chen 03/28'05								