

F

E

D

C

B

A

F

E



D

C

B

A

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
03	△	變更料號	2009.03.03	李彬彬
04	△	依上級要求變更圖號	2011.08.11	李芳忠

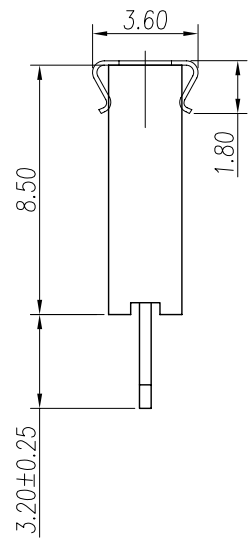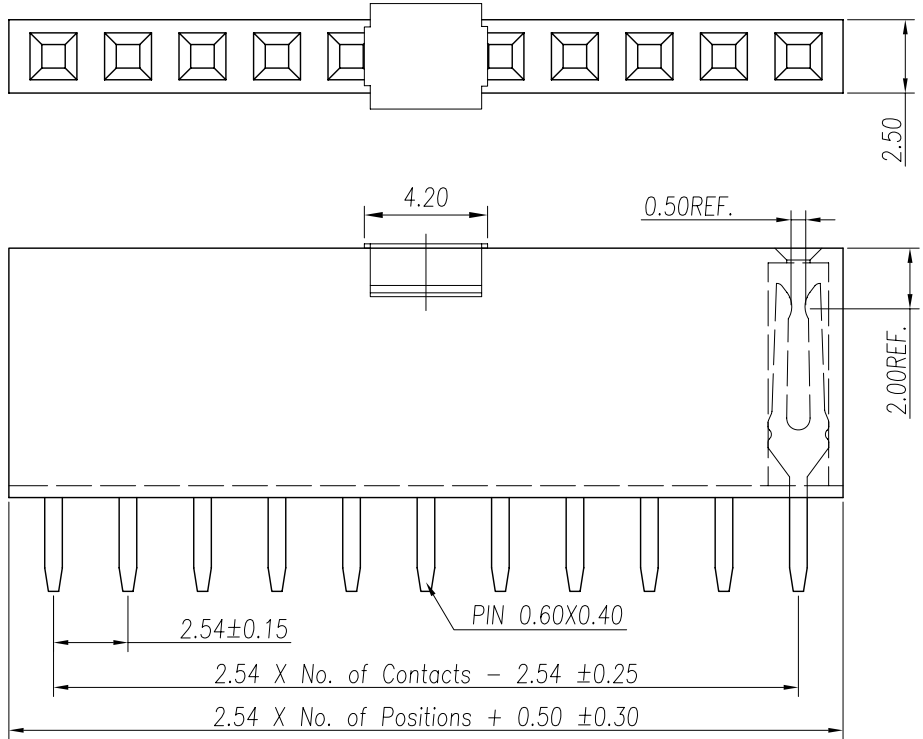

Specifications
Current Rating:3Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:600VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:Thermoplastic, UL 94V-0
PBT or the equivalent material
All materials must meet Greenconn
requirement for environment protection.

△ Ordering Information △

C SHA101 - XX XX A 001 A X A X


No. Of Pins Per Row
02~40

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin

Color
1=Black
6=Gray
K=Pink

Standard Packing
A=Box
Selective Packing
C=Tube
E=Cap+Tube
F=Cap+Tape&Reel

Recommended P.C.Board
Layout
(Tolerance:±0.05)



格稜股份有限公司 Greenconn Corporation			GENERAL TOLERANCE		DESIGN: 李芳忠	DATE: 2011.08.11	DWG. NO. △△ CSHA101-CA1AA	TITLE. 2.54 FEMALE HEADER SINGLE ROW DIP TYPE CONNECTOR
					CHECKED: 劉北平	DATE: 2011.08.11		
REV. 04	UNIT. mm	SCALE. 4:1	PAGE. 1/1	◎	AUDITED: 李輝	DATE: 2011.08.11	PART NO. △ CSHA101-XXXX A001AXAX	
					APPROVED: cc_li	DATE: 2011.08.11		