
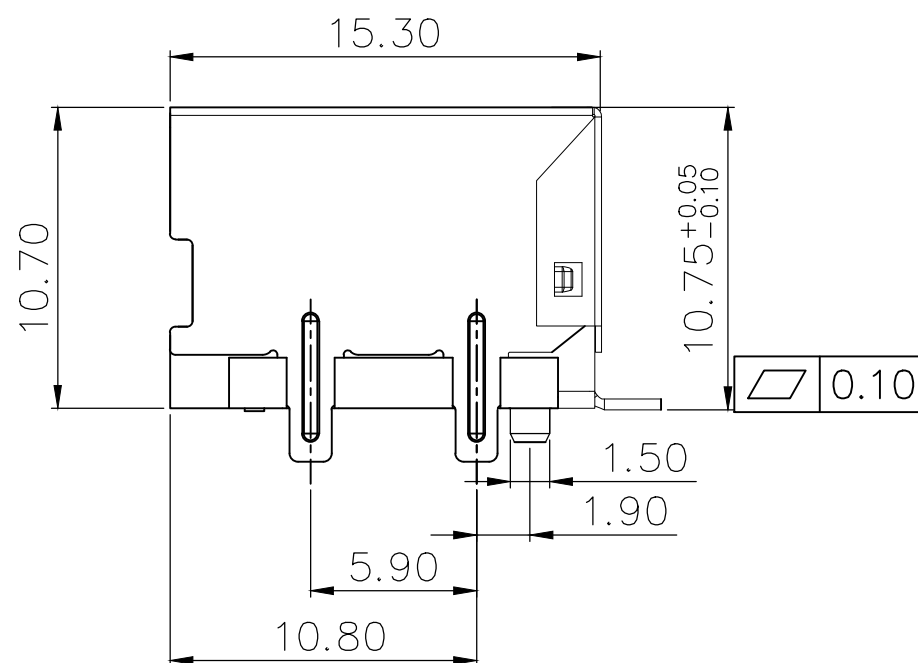


标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

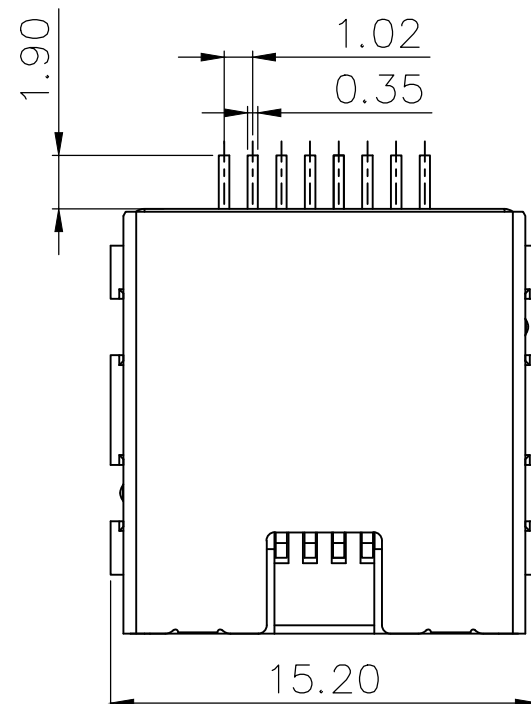

NOTE:

1. MATERIAL:

1.1 HOUSING: THERMOPLASTIC FLAMMABILITY BLACK

1.2 CONTACT: COPPER ALLOY(T=0.35mm)

1.3 SHELL: COPPER ALLOY(T=0.2mm)

2. FINISH:

2.1 CONTACT: 4u"Min.Au PLATED ON CONTACT AREA

G/F PLATING ON SOLDER TAIL AREA

NICKEL 50u"UNDERPLATING OVER ALL.

2.2 SHELL: NICKEL PLATING OVERALL

3. ELECTRICAL:

3.1 VOLTAGE RATING: 125 VAC RMS

3.2 CURRENT RATING: 1.5 AMP



3.3 CONTACT RESISTANCE: 30 MILLIOHMS MAX

3.4 INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500V DC

3.5 DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S MIN

4.MECHANICAL:

1.DURRABILITY: 750 CYCLES MIN

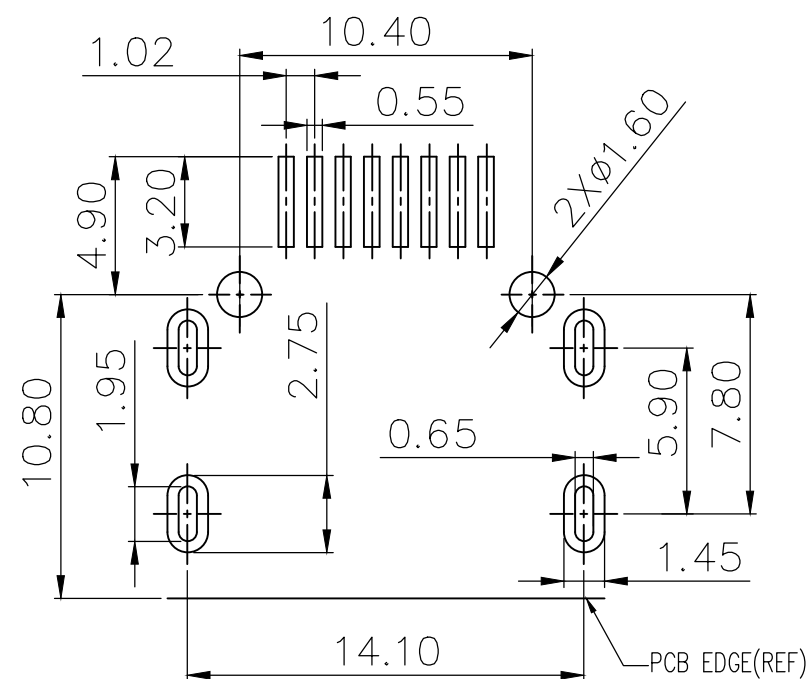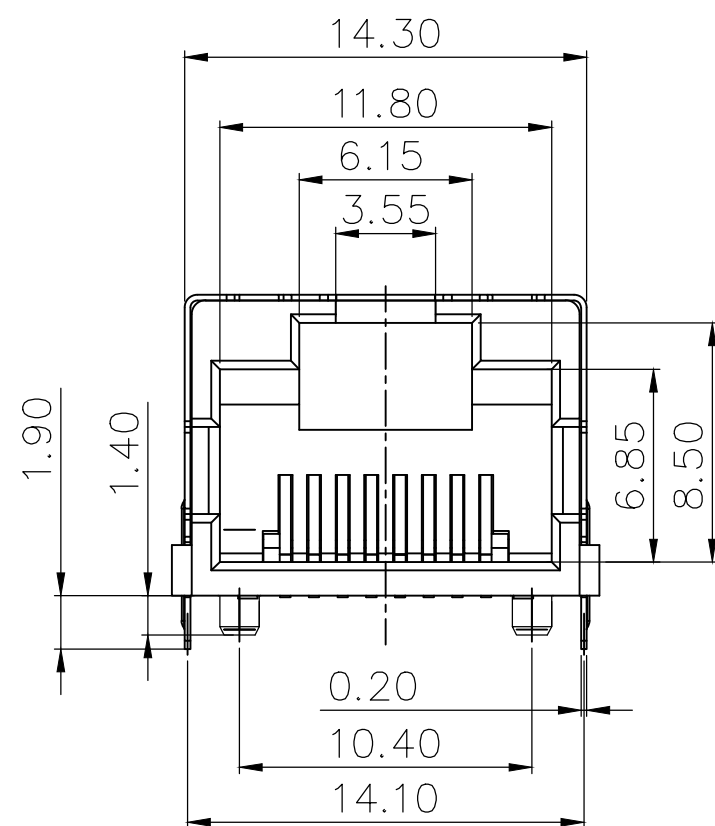

RECOMMENDED PCB LAYOUT(TOP VIEW)

GENERAL TOLERANCES: ±0.05

3	外壳	铜	镀镍	
2	接触	铜	镀金G/F	
1	基座	LCP	黑色	
序号	品 名	材 质	电镀/颜色	备 注



深圳市虹成电子有限公司

品 名 TITLE	网口
料 号 PART NO	HC-WK88-107H-064-T

UNLESS OTHERWISE,
GENERAL TOLERANCE:X. xxx ±0.10
X. xx ±0.20
X. x ±0.30

ANGULAR:

X. xx° ±1°
X. x° ±3°
X. ° ±5°比 列
SCALE

1:1

单 位
UNIT

MM

张 数
PART NO

1 OF 1

版 本
REV

A

制 图
DRAW

AhYe

审 核
CHECKED

夏操云

批 准
APPROVE

赵亮亮

