



REV.	ECN. NO.	APPD.
A		

NOTES:
 Current Rating:1.5AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40℃ to +105℃

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:PA6T+30%GF(UL94V-0)

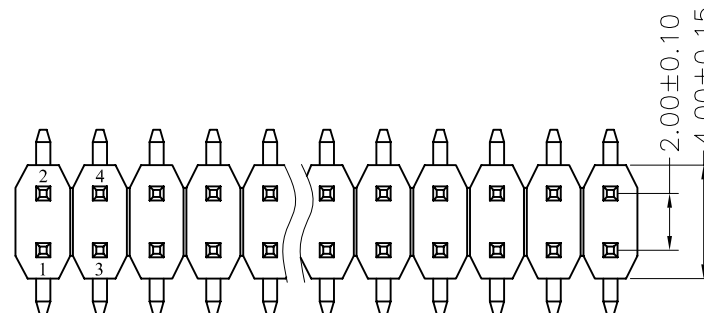



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

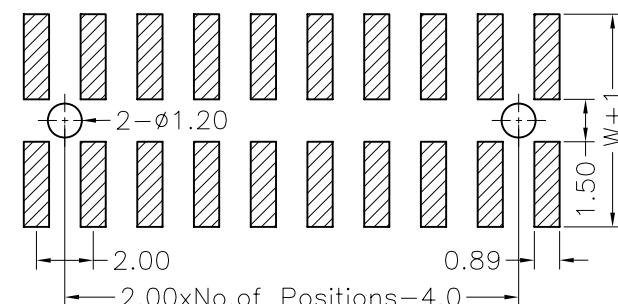

Ordering Information

MTP220-12XXM2

No.of Pins per
 Row: 01~40

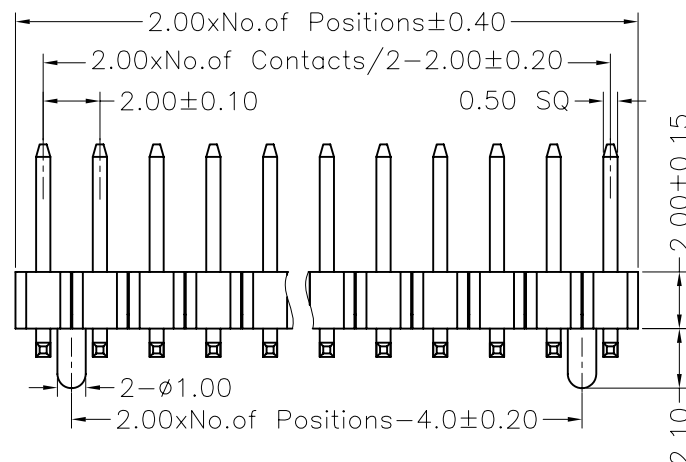

Dimension antitheses list			
ITEM	B	D	W
Standard	4.00	0.50	6.50
Alternate			

X. ± 0.30	X.° ± 5°	UNITS mm	NAME(INTENDED USE)	MINTRON CO.,LTD.		
.X ± 0.20	.X° ± 2°	MAT'L				
.XX ± 0.10	.XX° ± 1°	FINISH	PART NO.(INTENDED USE)	TITLE:		
.XXX ± 0.05	.XXX° ± 0.5°		APPD: SUNNY	PH2.00 DUAL ROW SMT H=2.0		
PIN HEADER CONNECTOR		Q'TY	CHKD: LISA	DWG NO.:		
			DR: ZOE 2006-11-28	MTP220-12XXM2		
				SCALE 1 / 1	SHEET 1 / 1	REV. A