




REV.	ECN Number	Description	Drawn
1	CS18100194	RELEASE	Jason_2018. 10. 26
2	E19110018	ADD HOUSING MATERIAL TYPE	CJ_2019. 11. 12

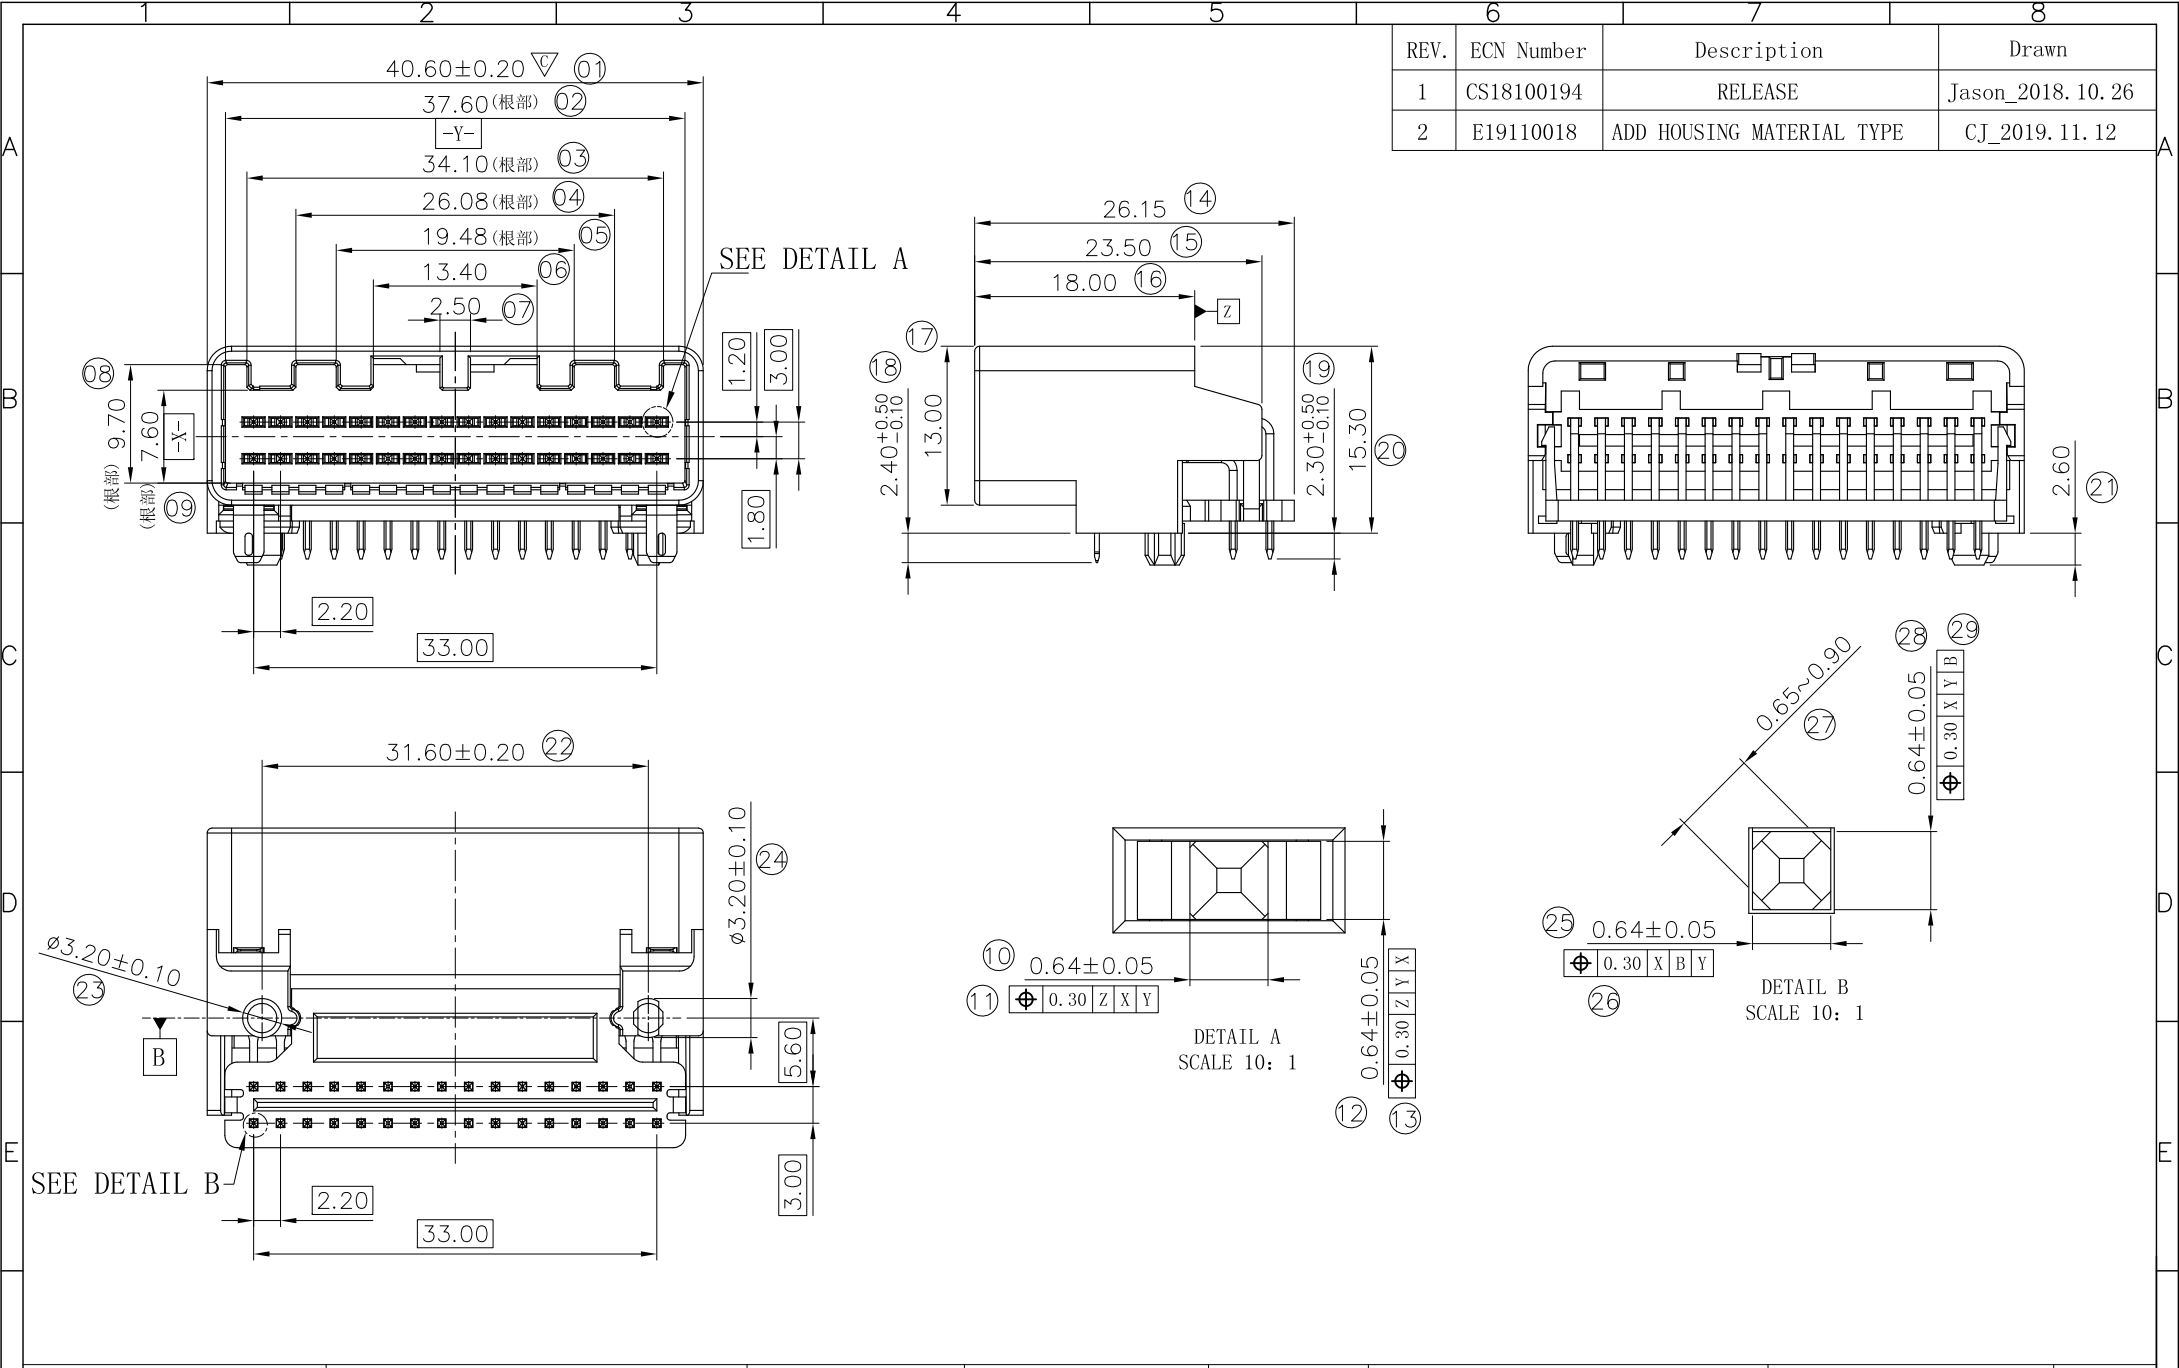


 ShenZhen ShenTai weixiang Electronics Co., Ltd.	TOLERANCE UNLESS OTHERWISE SPECIFIED				SCALE 1:1		ORIGINAL DRAWN: Chen jie		DATE 2019. 11. 12		DWG. NO. 600-0000-0369		TITLE PH2.2-32PIN R/A CONNECTOR CUSTOMER DRAWING		REV. 2	
	X. X	±0.30	X. °	±3°	UNIT mm		CHECK: Ady zhou		DATE 2019. 11. 12						PARTS NO. (INTENDED USE)	
	X. XX	±0.20	X. X°	±2°	SIZE A4 		APPROVE: Ady zhou		DATE 2019. 11. 12		APC5-32XX-X-XXX				1/4	
	X. XXX	±0.10	X. XX°													

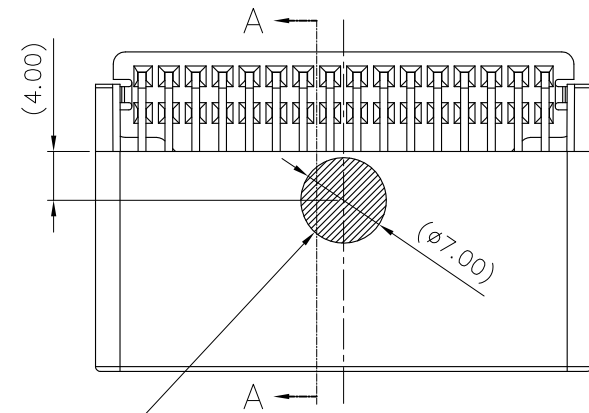


Suction nozzle area

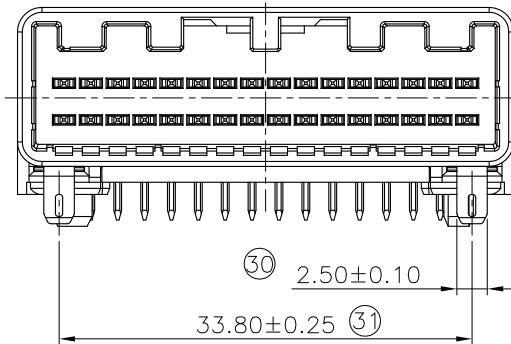

Not allowed to fall off

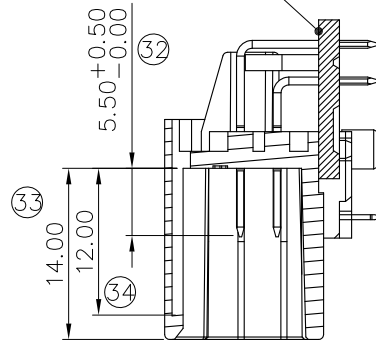

SECTION A-A

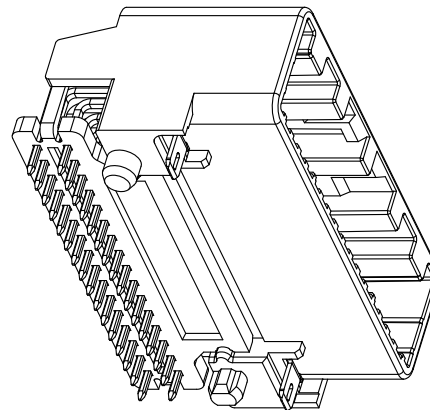

NOTES:

1. HOUSING MATERIAL:HIGH TEMPERATURE PLASTICS,UL94V-0.
2. CONTACT MATERIAL:COPPER ALLOY.
3. OPERATING TEMPERATURE RANGE: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$
4. STORAGE TEMPERATURE RANGE: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$
5. MINIMUM SOLDER STENCIL THICKNESS IS 0.12mm .
6. "▽"SIZE FOR CPK;
7. PRODUCT NUMBER MATRIX:

APC5-32XX-X-XXX

WTB
Power supply seat
2.20 pitch
T/H, R/A, Double Row
Pin number
32=32pin
Contact Plating:

Definition	Code
⊙ Matte Tin plated	A
⊙ Gold plated over all	
flash B	1u" R 3u" C
5u" D	10u" E 15u" F
20u" G	25u" H 30u" J

TYPE	DESCRIPTION
001	With clip, high temperature plastics,black
002	Without Clip, high temperature plastics,Natural
003	With Clip, high temperature plastics,Natural

NULL:Low temperature thermoplastic
F:High temperature thermoplastic(PA9T) △
H:Halogen free

T:Tray
K:REEL



ShenZhen ShenTai weixiang Electronics Co., Ltd.

TOLERANCE UNLESS OTHERWISE SPECIFIED

X. X	±0.30	X. °	±3°
X. XX	±0.20	X. X°	±2°
X. XXX	±0.10	X. XX°	

SCALE 1:1

UNIT mm

SIZE A4



ORIGINAL DRAWN: Chen jie

CHECK: Ady zhou

APPROVE: Ady zhou

DATE 2019.11.12

DATE 2019.11.12

DATE 2019.11.12

DWG. NO. 600-0000-0369

PARTS NO. (INTENDED USE)

APC5-32XX-X-XXX

TITLE PH2.2-32PIN R/A CONNECTOR

CUSTOMER DRAWING

REV. 2

SHEET


2/4

[illegible]


Technical drawing of a 12-pole stator with 12 slots per pole. The drawing shows the stator core with slots and dimensions. Key dimensions include: total length 34.65, total width 33.80, pole pitch 1.65, slot width 0.65, and various other slot and core dimensions. A fillet radius R0.82 is indicated at the bottom right corner.

ShenZhen ShenTai weixiang Electronics Co., Ltd.

TOLERANCE UNLESS OTHERWISE SPECIFIED				SCALE 1:1		ORIGINAL DRAWN: Chen jie	DATE 2019. 11. 12	DWG. NO. 600-0000-0369	TITLE PH2. 2-32PIN R/A CONNECTOR CUSTOMER DRAWING	REV. 2	
				UNIT mm		CHECK: Ady zhou	DATE 2019. 11. 12			PARTS NO. (INTENDED USE) APC5-32XX-X-XXX	SHEET 3/4
X. X	±0. 30	X. °	±3°	SIZE A4			APPROVE: Ady zhou	DATE 2019. 11. 12			
X. XX	±0. 20	X. X°	±2°								
X. XXX	±0. 10	X. XX°									

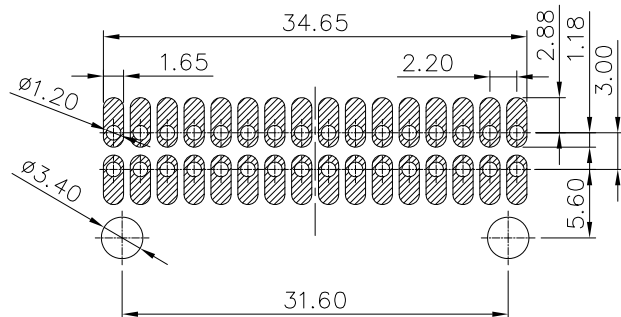


RECOMMENDED PCB LAYOUT (TOP SIDE)
TOLERANCE ± 0.05

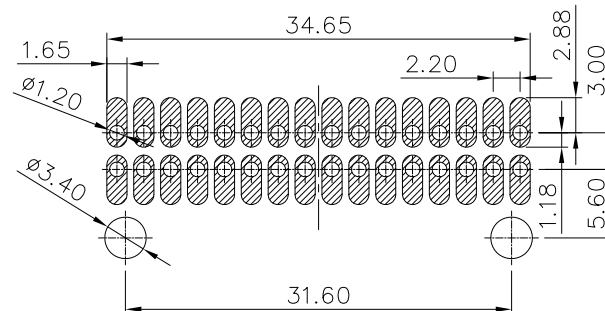


RECOMMENDED PCB LAYOUT (BOTTOM SIDE)
TOLERANCE ± 0.05

WITHOUT CLIP PCBLAYOUT SPEC

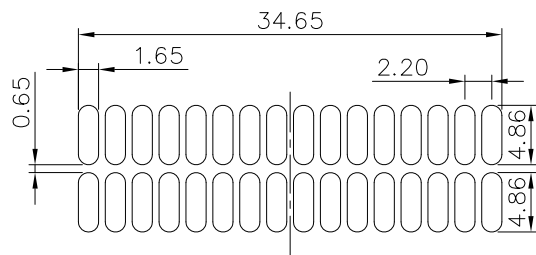

STEEL MESH (TOP SIDE) $T \geq 0.12\text{mm}$

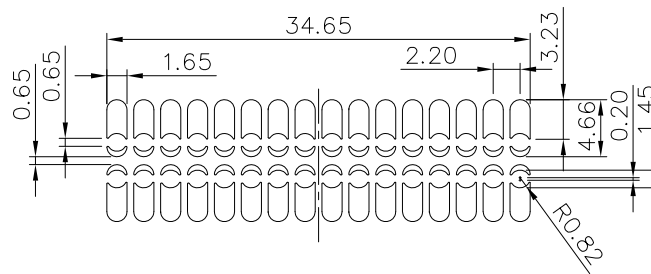

STEEL MESH (BOTTOM SIDE) $T \geq 0.12\text{mm}$



ShenZhen ShenTai weiXiang Electronics Co., Ltd.

TOLERANCE UNLESS OTHERWISE SPECIFIED

X. X	± 0.30	X. °	$\pm 3^\circ$
X. XX	± 0.20	X. X°	$\pm 2^\circ$
X. XXX	± 0.10	X. XX°	

SCALE 1:1

UNIT mm

SIZE A4



ORIGINAL DRAWN: Chen jie

CHECK: Ady zhou

APPROVE: Ady zhou

DATE 2019. 11. 12

DATE 2019. 11. 12

DATE 2019. 11. 12

DWG. NO. 600-0000-0369

PARTS NO. (INTENDED USE)

APC5-32XX-X-XXX

TITLE
PH2.2-32PIN R/A CONNECTOR
CUSTOMER DRAWING

REV. 2
SHEET 4/4