



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.


MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



ORIENTATION



CIRCUIT

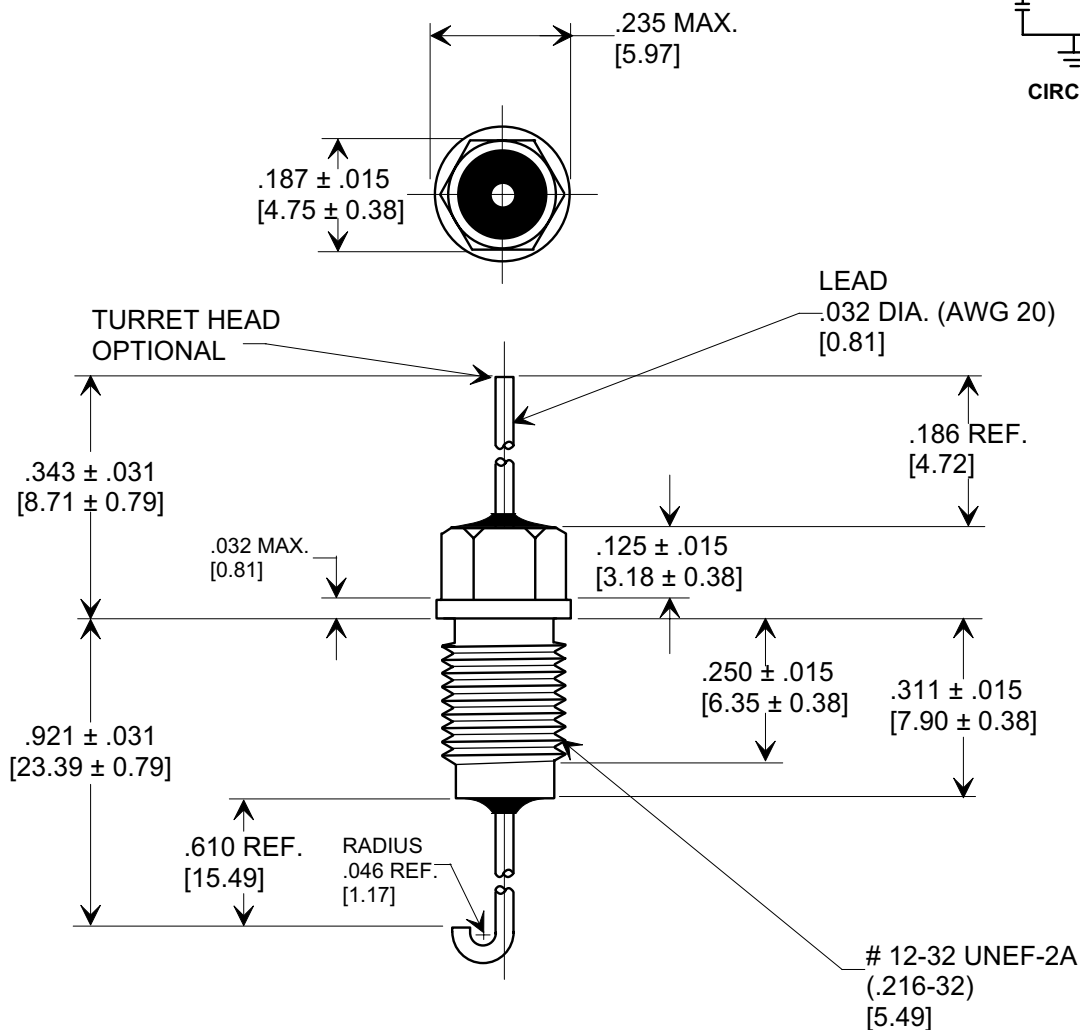

MIN. CAP.	+ 125 °C WORKING VOLTAGE	I.R. MIN. @ 100 VDC	DWV	CURRENT	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220				
					5 MHz	20 MHz	50 MHz	1 GHz	10 GHz
25,000 pF	100 VDC	10 GΩ	250 VDC	10 A	15	60	60	65	65

X-2015 Rev-0	REVISION RECORD				--TOLERANCES-- Unless Otherwise Specified		Title			
	Original Release C.O.		WAS SK 7096-003-S EC. 6-14-93		DECIMAL ±		EMI FILTER MIL 15733/61-0012			
	930528-2		0		ANGLES ±					
	DWG. REVISED EC. 5-25-94		940217-3		1		Drawn		L.E. 06-03-02	Scale 3 X
	NAILHEAD RMVD. 5-1-96		960409-5		2		Approved		T.C. 06-03-02	
	RDN TO COMPUTER FORMAT L.E. 06-03-02		20020528-3-05		3		TUSONIX TUCSON, ARIZONA		A 4253-501	
REVISED DIM. :610. S.M. 08-30-05		20020529-3-01		4						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tusonix / CTS:](#)

[4253-501](#)