


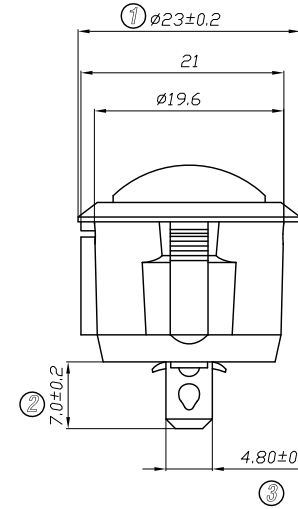
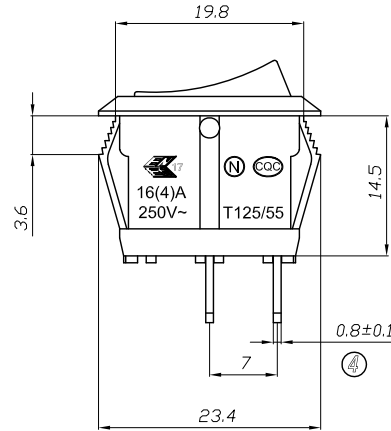




- 1.电路CIRCUIT:ON/OFF ;
2.快插端子QUICK CONNECTOR TYPE;
单刀单掷 (SINGLE POLE SINGLE THROW);
3.额定值RATING:16A 125/250VAC (UL;C-UL);
16(4)A 250V~T125/55(ENEC17;NEMKO;CQC;CB)
4.柄的颜色ACTUATOR COLOR:黑色BLACK
基座的颜色HOUSING COLOR:黑色BLACK
5.柄的印字形式ACTUATOR PRINTING:白色"●" WHITE COLOR
6.所有部件均使用环保材料
ALL MATERIALS USE IN CONFORMIY WITH THE RoHS DIRECTIVE



Panel cut out(Thickness: 3mm Max)

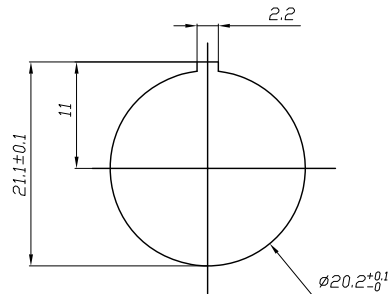

Circuit of Switch



5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN LMC 2019.05.20	ALL SIZE ARE IN	MM		DRAWING NO.	REV.
4	→	9	→	RANGE	TOLERANCE					SCALE	NO			
3	→	8	→	X	±0.30					MAT'L	***			
2	→	7	→	X.X	±0.20					MATERIAL NO.				
1	→	6	→	X.XX	±0.10									
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1°	LEGION ELECTRONIC & HARDWARE CO., LTD.				SS11-BBDWT-RR23-R		WIF120037	A0	