

# Product Specification

XBLW SN74HC165

8-bit Parallel-in, Serial out Shift Register

WEB | [www.xinboleic.com](http://www.xinboleic.com)




## Description


The SN74HC165 is a 8-bit serial or parallel-in/serial-out shift registers. The device features a serial data input (DS), eight parallel data inputs (D0 to D7) and two complementary serial outputs (Q7 and  $\bar{Q}7$ ). When the parallel load input ( $\bar{P}L$ ) is LOW the data from D0 to D7 is loaded into the shift register asynchronously. When  $\bar{P}L$  is HIGH data enters the register serially at DS. When the clock enable input ( $\bar{C}E$ ) is LOW data is shifted on the LOW-to-HIGH transitions of the CP input. A HIGH on  $\bar{C}E$  will disable the CP input. Inputs are overvoltage tolerant to 15V. This enables the device to be used in HIGH-to-LOW level shifting applications.

## Features


- Asynchronous 8-bit parallel load
- Synchronous serial input
- Specified from -40°C to +85°C
- Packaging information: DIP-16/SOP-16/TSSOP-16



DIP-16

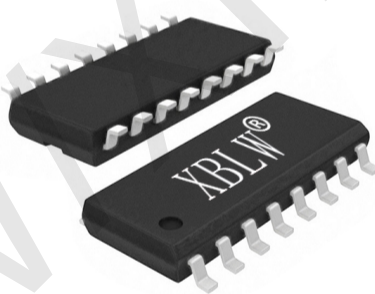

SOP-16

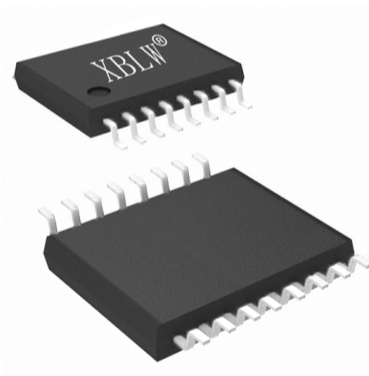

TSSOP-16

## Ordering Information

| Product Model      | Package Type | Marking  | Packing | Packing Qty  |
|--------------------|--------------|----------|---------|--------------|
| XBLW SN74HC165N    | DIP-16       | 74HC165N | Tube    | 1000Pcs/Box  |
| XBLWSN74HC165DTR   | SOP-16       | 74HC165  | Tape    | 2500Pcs/Reel |
| XBLW SN74HC165TDTR | TSSOP-16     | 74HC165  | Tape    | 3000Pcs/Reel |

## Block Diagram

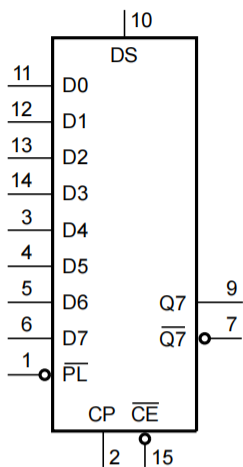


Figure 1. Logic symbol

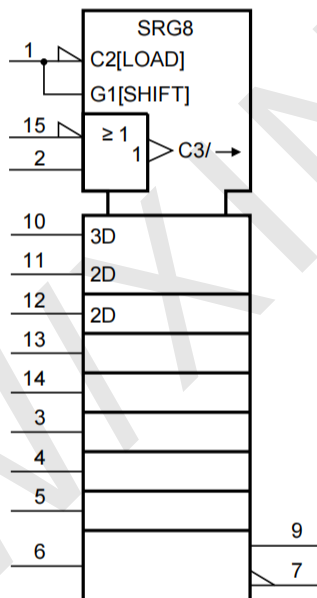


Figure 2. Functional diagram

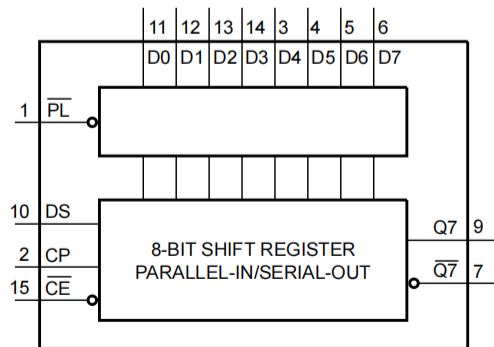


Figure 3. Functional diagram


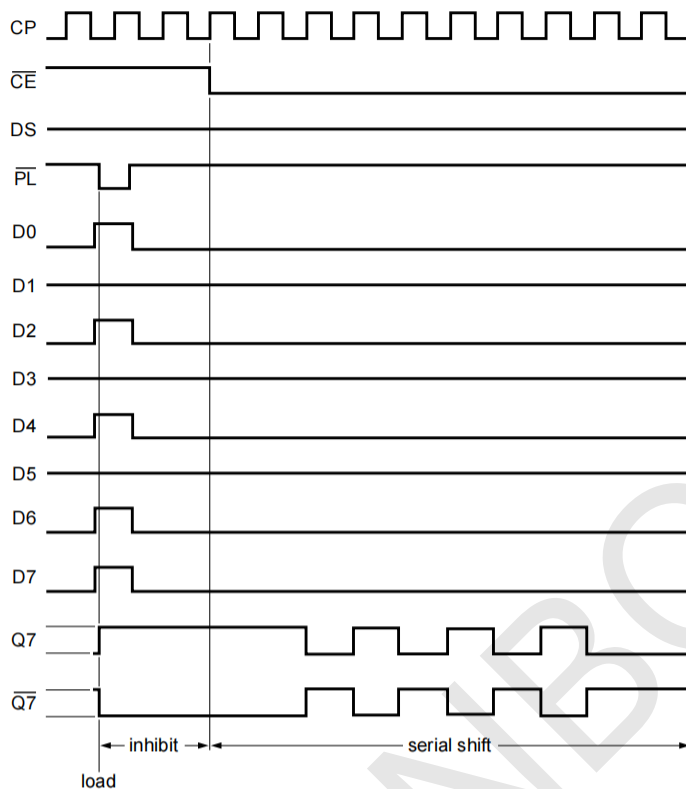


Figure 4. Timing diagram

## Pin Configurations

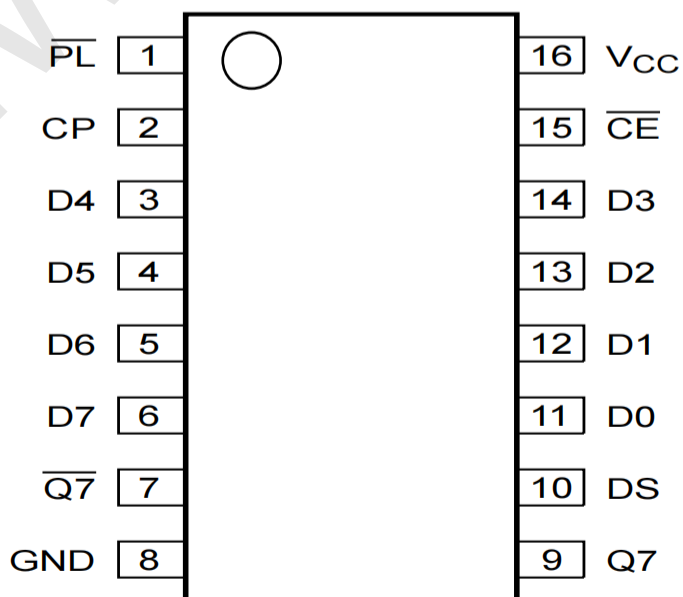

## Pin Description

| Pin No. | Pin Name               | Description                                   |
|---------|------------------------|-----------------------------------------------|
| 1       | $\overline{\text{PL}}$ | asynchronous parallel load input (active LOW) |
| 2       | CP                     | clock input ( LOW- to- HIGH, edge- triggered) |
| 3       | D4                     | parallel data input ( also referred to as Dn) |
| 4       | D5                     | parallel data input ( also referred to as Dn) |
| 5       | D6                     | parallel data input ( also referred to as Dn) |
| 6       | D7                     | parallel data input ( also referred to as Dn) |
| 7       | $\overline{\text{Q7}}$ | complementary output from the last stage      |
| 8       | GND                    | ground ( 0 V)                                 |
| 9       | Q7                     | serial output from the last stage             |
| 10      | DS                     | serial data input                             |
| 11      | D0                     | parallel data input ( also referred to as Dn) |
| 12      | D1                     | parallel data input ( also referred to as Dn) |
| 13      | D2                     | parallel data input ( also referred to as Dn) |
| 14      | D3                     | parallel data input ( also referred to as Dn) |
| 15      | $\overline{\text{CE}}$ | clock enable input (active LOW)               |
| 16      | V <sub>CC</sub>        | supply voltage                                |

## Function Table

| Operating mode    | Input                  |                        |    |    |          | Qn register |          | Output |                        |
|-------------------|------------------------|------------------------|----|----|----------|-------------|----------|--------|------------------------|
|                   | $\overline{\text{PL}}$ | $\overline{\text{CE}}$ | CP | DS | D0 to D7 | Q0          | Q1 to Q6 | Q7     | $\overline{\text{Q7}}$ |
| parallel load     | L                      | X                      | X  | X  | L        | L           | L to L   | L      | H                      |
|                   | L                      | X                      | X  | X  | H        | H           | H to H   | H      | L                      |
| serial shift      | H                      | L                      | ↑  | l  | X        | L           | q0 to q5 | q6     | $\overline{\text{q6}}$ |
|                   | H                      | L                      | ↑  | h  | X        | H           | q0 to q5 | q6     | $\overline{\text{q6}}$ |
|                   | H                      | ↑                      | L  | l  | X        | L           | q0 to q5 | q6     | $\overline{\text{q6}}$ |
|                   | H                      | ↑                      | L  | h  | X        | H           | q0 to q5 | q6     | $\overline{\text{q6}}$ |
| hold "do nothing" | H                      | H                      | X  | X  | X        | q0          | q1 to q6 | q7     | $\overline{\text{q7}}$ |
|                   | H                      | X                      | H  | X  | X        | q0          | q1 to q6 | q7     | $\overline{\text{q7}}$ |

Note: H= HIGH voltage level;

h=HIGH voltage level one set-up time prior to the LOW-to-HIGH clock transition;

L= LOW voltagelevel;↑= LOW-to-HIGH clock transition;

l=LOW voltage level one set-up time prior to the LOW-to-HIGH clock transition;

q=state of the referenced output one set-up time prior to the LOW-to-HIGH clock transition;

X=don't care;

↑ =LOW-to-HIGH clock transition.

## Electrical Parameter

### Absolute Maximum Ratings

(Voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter               | Symbol    | Conditions                           | Min. | Max. | Unit |
|-------------------------|-----------|--------------------------------------|------|------|------|
| supply voltage          | $V_{CC}$  | -                                    | -0.5 | +7   | V    |
| input clamping current  | $I_{IK}$  | $V_I < -0.5V$ or $V_I > V_{CC}+0.5V$ | -    | ±20  | mA   |
| output clamping current | $I_{OK}$  | $V_O < -0.5V$ or $V_O > V_{CC}+0.5V$ | -    | ±20  | mA   |
| output current          | $I_O$     | $-0.5V < V_O < V_{CC}+0.5V$          | -    | ±25  | mA   |
| supply current          | $I_{CC}$  | -                                    | -    | 50   | mA   |
| ground current          | $I_{GND}$ | -                                    | -50  | -    | mA   |
| Total power dissipation | $P_{tot}$ | -                                    | -    | 500  | mW   |
| Storage temperature     | $T_{stg}$ | -                                    | -65  | +150 | °C   |
| soldering temperature   | $T_L$     | 10s                                  | DIP  | 245  | °C   |
|                         |           |                                      | SOP  | 250  | °C   |

Note:

- [ 1] For DIP16 packages: above 70°C the value of  $P_{tot}$  derates linearly with 12mW/K.
- [2] For SOP16 packages: above 70°C the value of  $P_{tot}$  derates linearly with 8mW/K.
- [3] For (T)SSOP16 packages: above 60°C the value of  $P_{tot}$  derates linearly with 5.5mW/K.

### Recommended Operating Conditions

| Parameter                           | Symbol              | Conditions    | Min. | Typ. | Max.     | Unit |
|-------------------------------------|---------------------|---------------|------|------|----------|------|
| supply voltage                      | $V_{CC}$            | -             | 2.0  | 5.0  | 6.0      | V    |
| input voltage                       | $V_I$               | -             | 0    | -    | $V_{CC}$ | V    |
| output voltage                      | $V_O$               | -             | 0    | -    | $V_{CC}$ | V    |
| input transition rise and fall rate | $\Delta t/\Delta V$ | $V_{CC}=2.0V$ | -    | -    | 625      | ns/V |
|                                     |                     | $V_{CC}=4.5V$ | -    | 1.67 | 139      | ns/V |
|                                     |                     | $V_{CC}=6.0V$ | -    | -    | 83       | ns/V |
| ambient temperature                 | $T_{amb}$           | -             | -40  | -    | +85      | °C   |

## Electrical Characteristics

### DC Characteristics 1

( $T_{amb}=25^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter                 | Symbol          | Conditions                                                                            |                                               | Min. | Typ. | Max. | Unit |
|---------------------------|-----------------|---------------------------------------------------------------------------------------|-----------------------------------------------|------|------|------|------|
| HIGH-level input voltage  | V <sub>IH</sub> | V <sub>CC</sub> =2.0V                                                                 |                                               | 1.5  | 1.2  | -    | V    |
|                           |                 | V <sub>CC</sub> =4.5V                                                                 |                                               | 3.15 | 2.4  | -    | V    |
|                           |                 | V <sub>CC</sub> = 6.0V                                                                |                                               | 4.2  | 3.2  | -    | V    |
| LOW-level input voltage   | V <sub>IL</sub> | V <sub>CC</sub> =2.0V                                                                 |                                               | -    | 0.8  | 0.5  | V    |
|                           |                 | V <sub>CC</sub> =4.5V                                                                 |                                               | -    | 2.1  | 1.35 | V    |
|                           |                 | V <sub>CC</sub> = 6.0V                                                                |                                               | -    | 2.8  | 1.8  | V    |
| HIGH-level output voltage | V <sub>OH</sub> | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                   | I <sub>O</sub> =-20uA; V <sub>CC</sub> =2.0V  | 1.9  | 2.0  | -    | V    |
|                           |                 |                                                                                       | I <sub>O</sub> =-20uA; V <sub>CC</sub> =4.5V  | 4.4  | 4.5  | -    | V    |
|                           |                 |                                                                                       | I <sub>O</sub> =-20uA; V <sub>CC</sub> =6.0V  | 5.9  | 6.0  | -    | V    |
|                           |                 |                                                                                       | I <sub>O</sub> =-4.0mA; V <sub>CC</sub> =4.5V | 3.98 | 4.32 | -    | V    |
|                           |                 |                                                                                       | I <sub>O</sub> =-5.2mA; V <sub>CC</sub> =6.0V | 5.48 | 5.81 | -    | V    |
| LOW-level output voltage  | V <sub>OL</sub> | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                   | I <sub>O</sub> = 20uA; V <sub>CC</sub> =2.0V  | -    | 0    | 0.1  | V    |
|                           |                 |                                                                                       | I <sub>O</sub> = 20uA; V <sub>CC</sub> =4.5V  | -    | 0    | 0.1  | V    |
|                           |                 |                                                                                       | I <sub>O</sub> = 20uA; V <sub>CC</sub> =6.0V  | -    | 0    | 0.1  | V    |
|                           |                 |                                                                                       | I <sub>O</sub> =4.0mA; V <sub>CC</sub> =4.5V  | -    | 0.15 | 0.26 | V    |
|                           |                 |                                                                                       | I <sub>O</sub> =5.2mA; V <sub>CC</sub> =6.0V  | -    | 0.16 | 0.26 | V    |
| input leakage current     | I <sub>I</sub>  | V <sub>I</sub> = V <sub>CC</sub> or GND; V <sub>CC</sub> = 6.0V                       |                                               | -    | -    | ±1   | uA   |
| supply current            | I <sub>CC</sub> | V <sub>I</sub> = V <sub>CC</sub> or GND; I <sub>O</sub> = 0 A; V <sub>CC</sub> = 6.0V |                                               | -    | -    | 8    | uA   |
| Input capacitance         | C <sub>I</sub>  | -                                                                                     |                                               | -    | 3.5  | -    | pF   |

### DC Characteristics 2

( $T_{amb}=-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter                 | Symbol          | Conditions                                                                         |                                               | Min. | Typ. | Max. | Unit |
|---------------------------|-----------------|------------------------------------------------------------------------------------|-----------------------------------------------|------|------|------|------|
| HIGH-level input voltage  | V <sub>IH</sub> | V <sub>CC</sub> =2.0V                                                              |                                               | 1.5  | -    | -    | V    |
|                           |                 | V <sub>CC</sub> =4.5V                                                              |                                               | 3.15 | -    | -    | V    |
|                           |                 | V <sub>CC</sub> =6.0V                                                              |                                               | 4.2  | -    | -    | V    |
| LOW-level input voltage   | V <sub>IL</sub> | V <sub>CC</sub> =2.0V                                                              |                                               | -    | -    | 0.5  | V    |
|                           |                 | V <sub>CC</sub> =4.5V                                                              |                                               | -    | -    | 1.35 | V    |
|                           |                 | V <sub>CC</sub> =6.0V                                                              |                                               | -    | -    | 1.8  | V    |
| HIGH-level output voltage | V <sub>OH</sub> | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                | I <sub>O</sub> =-20uA; V <sub>CC</sub> =2.0V  | 1.9  | -    | -    | V    |
|                           |                 |                                                                                    | I <sub>O</sub> =-20uA; V <sub>CC</sub> =4.5V  | 4.4  | -    | -    | V    |
|                           |                 |                                                                                    | I <sub>O</sub> =-20uA; V <sub>CC</sub> =6.0V  | 5.9  | -    | -    | V    |
|                           |                 |                                                                                    | I <sub>O</sub> =-4.0mA; V <sub>CC</sub> =4.5V | 3.84 | -    | -    | V    |
|                           |                 |                                                                                    | I <sub>O</sub> =-5.2mA; V <sub>CC</sub> =6.0V | 5.34 | -    | -    | V    |
| LOW-level output voltage  | V <sub>OL</sub> | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                | I <sub>O</sub> =20uA; V <sub>CC</sub> =2.0V   | -    | -    | 0.1  | V    |
|                           |                 |                                                                                    | I <sub>O</sub> =20uA; V <sub>CC</sub> =4.5V   | -    | -    | 0.1  | V    |
|                           |                 |                                                                                    | I <sub>O</sub> =20uA; V <sub>CC</sub> =6.0V   | -    | -    | 0.1  | V    |
|                           |                 |                                                                                    | I <sub>O</sub> =4.0mA; V <sub>CC</sub> =4.5V  | -    | -    | 0.33 | V    |
|                           |                 |                                                                                    | I <sub>O</sub> =5.2mA; V <sub>CC</sub> =6.0V  | -    | -    | 0.33 | V    |
| input leakage current     | I <sub>I</sub>  | V <sub>I</sub> = V <sub>CC</sub> or GND; V <sub>CC</sub> =6.0V                     |                                               | -    | -    | ±1   | uA   |
| supply current            | I <sub>CC</sub> | V <sub>I</sub> = V <sub>CC</sub> or GND; I <sub>O</sub> =0A; V <sub>CC</sub> =6.0V |                                               | -    | -    | 80   | uA   |

# AC Characteristics 1

( $T_{amb}=25^{\circ}\text{C}$ ,  $GND=0\text{V}$ ,  $C_L=50\text{pF}$ , unless otherwise specified.)

| Parameter         | Symbol             | Conditions                                                         |                         | Min. | Typ. | Max. | Unit |
|-------------------|--------------------|--------------------------------------------------------------------|-------------------------|------|------|------|------|
| propagation delay | $t_{PLH}, t_{PHL}$ | CP, $\overline{CE}$ to Q7, $\overline{Q7}$ ; see Figure 6          | $V_{CC}=2.0V$           | -    | 52   | 165  | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$           | -    | 19   | 33   | ns   |
|                   |                    |                                                                    | $V_{CC}=5.0V; C_L=15pF$ | -    | 16   | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$           | -    | 15   | 28   | ns   |
|                   |                    | $\overline{PL}$ to Q7, $\overline{Q7}$ ; see Figure 7              | $V_{CC}=2.0V$           | -    | 50   | 165  | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$           | -    | 18   | 33   | ns   |
|                   |                    |                                                                    | $V_{CC}=5.0V; C_L=15pF$ | -    | 15   | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$           | -    | 14   | 28   | ns   |
|                   |                    | D7 to Q7, $\overline{Q7}$ ; see Figure 8                           | $V_{CC}=2.0V$           | -    | 36   | 120  | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$           | -    | 13   | 24   | ns   |
|                   |                    |                                                                    | $V_{CC}=5.0V; C_L=15pF$ | -    | 11   | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$           | -    | 10   | 20   | ns   |
| transition time   | $t_{THL}, t_{TLH}$ | Q7, $\overline{Q7}$ output; see Figure 6                           | $V_{CC}=2.0V$           | -    | 19   | 75   | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$           | -    | 7    | 15   | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$           | -    | 6    | 13   | ns   |
| pulse width       | $t_w$              | CP input HIGH or LOW; see Figure 6                                 | $V_{CC}=2.0V$           | 80   | 17   | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$           | 16   | 6    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$           | 14   | 5    | -    | ns   |
|                   |                    | $\overline{PL}$ input LOW; see Figure 7                            | $V_{CC}=2.0V$           | 80   | 14   | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$           | 16   | 5    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$           | 14   | 4    | -    | ns   |
| recovery time     | $t_{rec}$          | $\overline{PL}$ to CP, $\overline{CE}$ ; see Figure 7              | $V_{CC}=2.0V$           | 100  | 22   | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$           | 20   | 8    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$           | 17   | 6    | -    | ns   |
| set-up time       | $t_{su}$           | DS to CP, $\overline{CE}$ ; see Figure 9                           | $V_{CC}=2.0V$           | 80   | 11   | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$           | 16   | 4    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$           | 14   | 3    | -    | ns   |
|                   |                    | $\overline{CE}$ to CP and CP to $\overline{CE}$ ; see Figure 9     | $V_{CC}=2.0V$           | 80   | 17   | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$           | 16   | 6    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$           | 14   | 5    | -    | ns   |
|                   |                    | Dn to $\overline{PL}$ ; see Figure 10                              | $V_{CC}=2.0V$           | 80   | 22   | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$           | 16   | 8    | -    | ns   |
| $V_{CC}=6.0V$     | 14                 |                                                                    | 6                       | -    | ns   |      |      |
| hold time         | $t_h$              | DS to CP, $\overline{CE}$ and Dn to $\overline{PL}$ ; see Figure 9 | $V_{CC}=2.0V$           | 5    | 2    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$           | 5    | 2    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$           | 5    | 2    | -    | ns   |
|                   |                    | $\overline{CE}$ to CP and CP to $\overline{CE}$ ; see Figure 9     | $V_{CC}=2.0V$           | 5    | -17  | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$           | 5    | -6   | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$           | 5    | -5   | -    | ns   |
| maximum frequency | $f_{max}$          | CP input; see Figure 6                                             | $V_{CC}=2.0V$           | 6    | 17   | -    | MHz  |
|                   |                    |                                                                    | $V_{CC}=4.5V$           | 30   | -    | -    | MHz  |
|                   |                    |                                                                    | $V_{CC}=5.0V; C_L=15pF$ | 32   | -    | -    | MHz  |
|                   |                    |                                                                    | $V_{CC}=6.0V$           | 35   | -    | -    | MHz  |

## AC Characteristics 2

( $T_{amb} = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ,  $GND = 0V$ ,  $C_L = 50\text{pF}$ , unless otherwise specified.)

| Parameter         | Symbol             | Conditions                                                         |               | Min. | Typ. | Max. | Unit |
|-------------------|--------------------|--------------------------------------------------------------------|---------------|------|------|------|------|
| propagation delay | $t_{PLH}, t_{PHL}$ | CP, $\overline{CE}$ to Q7, $\overline{Q7}$ ; see Figure 6          | $V_{CC}=2.0V$ | -    | -    | 205  | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$ | -    | -    | 41   | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$ | -    | -    | 35   | ns   |
|                   |                    | $\overline{PL}$ to Q7, $\overline{Q7}$ ; see Figure 7              | $V_{CC}=2.0V$ | -    | -    | 205  | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$ | -    | -    | 41   | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$ | -    | -    | 35   | ns   |
|                   |                    | D7 to Q7, $\overline{Q7}$ ; see Figure 8                           | $V_{CC}=2.0V$ | -    | -    | 150  | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$ | -    | -    | 30   | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$ | -    | -    | 26   | ns   |
| transition time   | $t_{THL}, t_{TLH}$ | Q7, $\overline{Q7}$ output; see Figure 6                           | $V_{CC}=2.0V$ | -    | -    | 95   | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$ | -    | -    | 19   | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$ | -    | -    | 16   | ns   |
| pulse width       | $t_W$              | CP input HIGH or LOW; see Figure 6                                 | $V_{CC}=2.0V$ | 100  | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$ | 20   | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$ | 17   | -    | -    | ns   |
|                   |                    | $\overline{PL}$ input LOW; see Figure 7                            | $V_{CC}=2.0V$ | 100  | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$ | 20   | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$ | 17   | -    | -    | ns   |
| recovery time     | $t_{rec}$          | $\overline{PL}$ to CP, $\overline{CE}$ ; see Figure 7              | $V_{CC}=2.0V$ | 125  | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$ | 25   | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$ | 21   | -    | -    | ns   |
| set-up time       | $t_{su}$           | DS to CP, $\overline{CE}$ ; see Figure 9                           | $V_{CC}=2.0V$ | 100  | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$ | 20   | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$ | 17   | -    | -    | ns   |
|                   |                    | $\overline{CE}$ to CP and CP to $\overline{CE}$ ; see Figure 9     | $V_{CC}=2.0V$ | 100  | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$ | 20   | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$ | 17   | -    | -    | ns   |
|                   |                    | Dn to $\overline{PL}$ ; see Figure 10                              | $V_{CC}=2.0V$ | 100  | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$ | 20   | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$ | 17   | -    | -    | ns   |
| hold time         | $t_h$              | DS to CP, $\overline{CE}$ and Dn to $\overline{PL}$ ; see Figure 9 | $V_{CC}=2.0V$ | 5    | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$ | 5    | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$ | 5    | -    | -    | ns   |
|                   |                    | $\overline{CE}$ to CP and CP to $\overline{CE}$ ; see Figure 9     | $V_{CC}=2.0V$ | 5    | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=4.5V$ | 5    | -    | -    | ns   |
|                   |                    |                                                                    | $V_{CC}=6.0V$ | 5    | -    | -    | ns   |
| maximum frequency | $f_{max}$          | CP input; see Figure 6                                             | $V_{CC}=2.0V$ | 5    | -    | -    | MHz  |
|                   |                    |                                                                    | $V_{CC}=4.5V$ | 24   | -    | -    | MHz  |
|                   |                    |                                                                    | $V_{CC}=6.0V$ | 28   | -    | -    | MHz  |

## Testing Circuit

### AC Testing Circuit

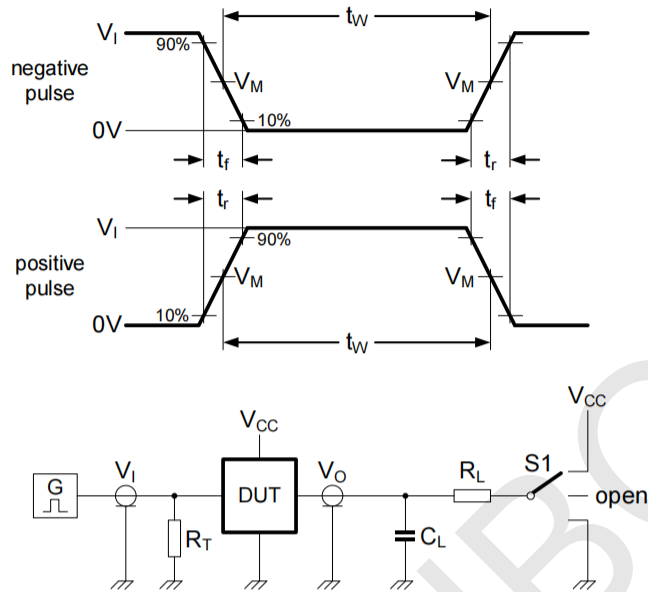


Figure 5. Test circuit for measuring switching times

Definitions for test circuit:

$C_L$ =load capacitance including jig and probe capacitance.

$R_T$ =termination resistance should be equal to the output impedance  $Z_o$  of the pulse generator.

$R_L$ =Load resistance,  $S1$ =Test selection switch.

### AC Testing Waveforms

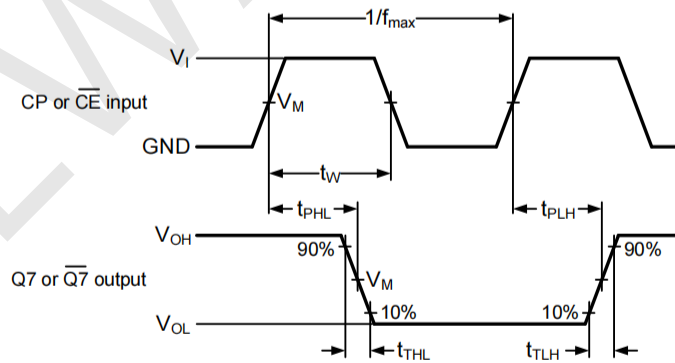


Figure 6. The clock (CP) or clock enable ( $\overline{CE}$ ) to output ( $Q7$  or  $\overline{Q7}$ ) propagation delays, the clock pulse width, the maximum clock frequency and the output transition times

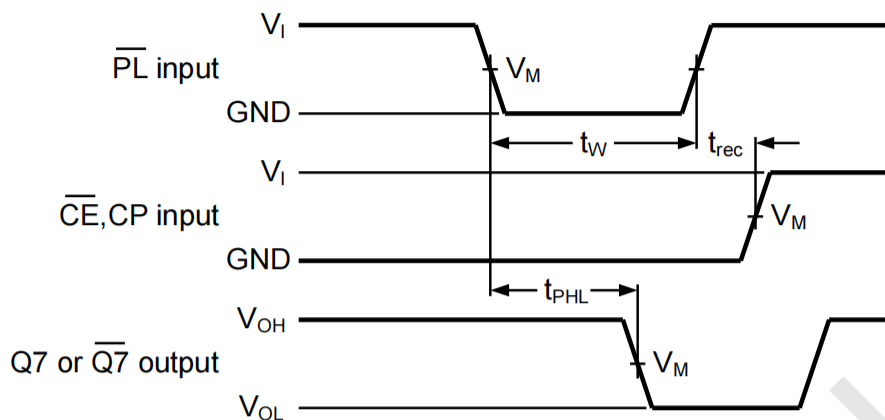


Figure 7. The parallel load ( $\overline{PL}$ ) pulse width, the parallel load to output (Q7 or  $\overline{Q7}$ ) propagation delays, the parallel load to clock (CP) and clock enable ( $\overline{CE}$ ) recovery time


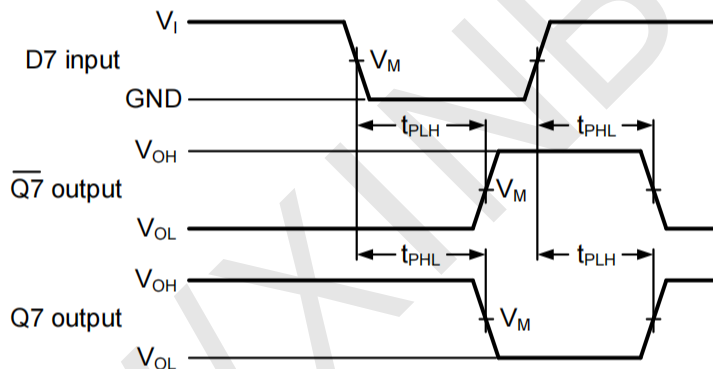


Figure 8. The data input (D7) to output (Q7 or  $\overline{Q7}$ ) propagation delays when  $\overline{PL}$  is LOW

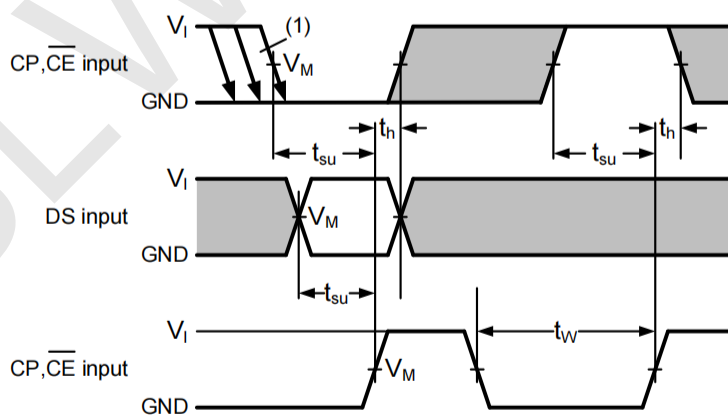

(1)  $\overline{CE}$  may change only from HIGH-to-LOW while CP is LOW.

Figure 9. The set-up and hold times from the serial data input (DS) to the clock (CP) and clock enable ( $\overline{CE}$ ) inputs, from the clock enable input ( $\overline{CE}$ ) to the clock input (CP) and from the clock input (CP) to the clock enable input ( $\overline{CE}$ )

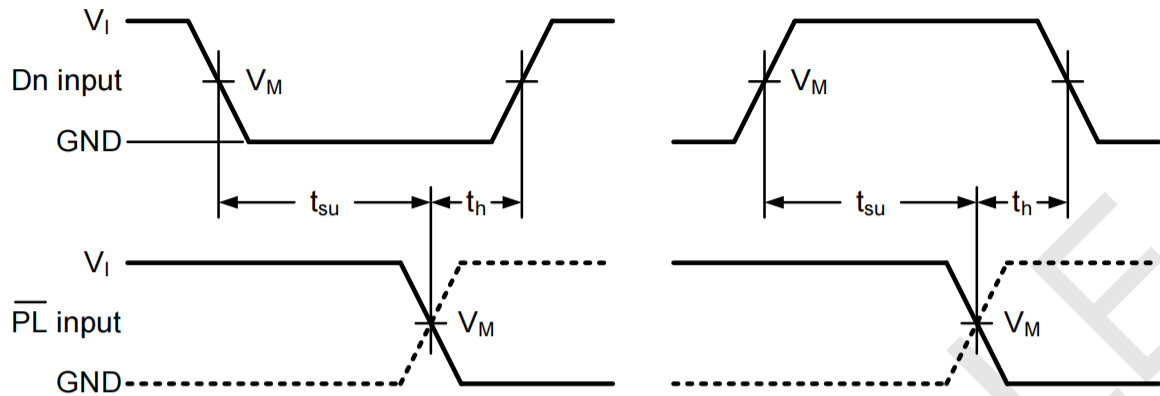


Figure 10. The set-up and hold times from the data inputs (Dn) to the parallel load input ( $\overline{PL}$ )

#### Measurement Points

| Type      | Input    |                     | Output              |
|-----------|----------|---------------------|---------------------|
|           | $V_I$    | $V_M$               | $V_M$               |
| SN74HC165 | $V_{CC}$ | $0.5 \times V_{CC}$ | $0.5 \times V_{CC}$ |


#### Test Data

| Type      | Input    |            | Load       |             | S1 position        |
|-----------|----------|------------|------------|-------------|--------------------|
|           | $V_I$    | $t_r, t_f$ | $C_L$      | $R_L$       | $t_{PHL}, t_{PLH}$ |
| SN74HC165 | $V_{CC}$ | 6.0ns      | 15pF, 50pF | 1k $\Omega$ | open               |

## Package Information


### · DIP-16

| Symbol | Size | Dimensions In Millimeters |          | Symbol | Size | Dimensions In Inches |          |
|--------|------|---------------------------|----------|--------|------|----------------------|----------|
|        |      | Min( mm)                  | Max( mm) |        |      | Min( in)             | Max( in) |
| A      |      | 3.710                     | 4.310    | A      |      | 0.146                | 0.170    |
| A1     |      | 0.510                     |          | A1     |      | 0.020                |          |
| A2     |      | 3.200                     | 3.600    | A2     |      | 0.126                | 0.142    |
| B      |      | 0.380                     | 0.570    | B      |      | 0.015                | 0.022    |
| B1     |      | 1.524 (BSC)               |          | B1     |      | 0.060 (BSC)          |          |
| C      |      | 0.204                     | 0.360    | C      |      | 0.008                | 0.014    |
| D      |      | 18.80                     | 19.20    | D      |      | 0.740                | 0.756    |
| E      |      | 6.200                     | 6.600    | E      |      | 0.244                | 0.260    |
| E1     |      | 7.320                     | 7.920    | E1     |      | 0.288                | 0.312    |
| e      |      | 2.540 (BSC)               |          | e      |      | 0.100 (BSC)          |          |
| L      |      | 3.000                     | 3.600    | L      |      | 0.118                | 0.142    |
| E2     |      | 8.400                     | 9.000    | E2     |      | 0.331                | 0.354    |

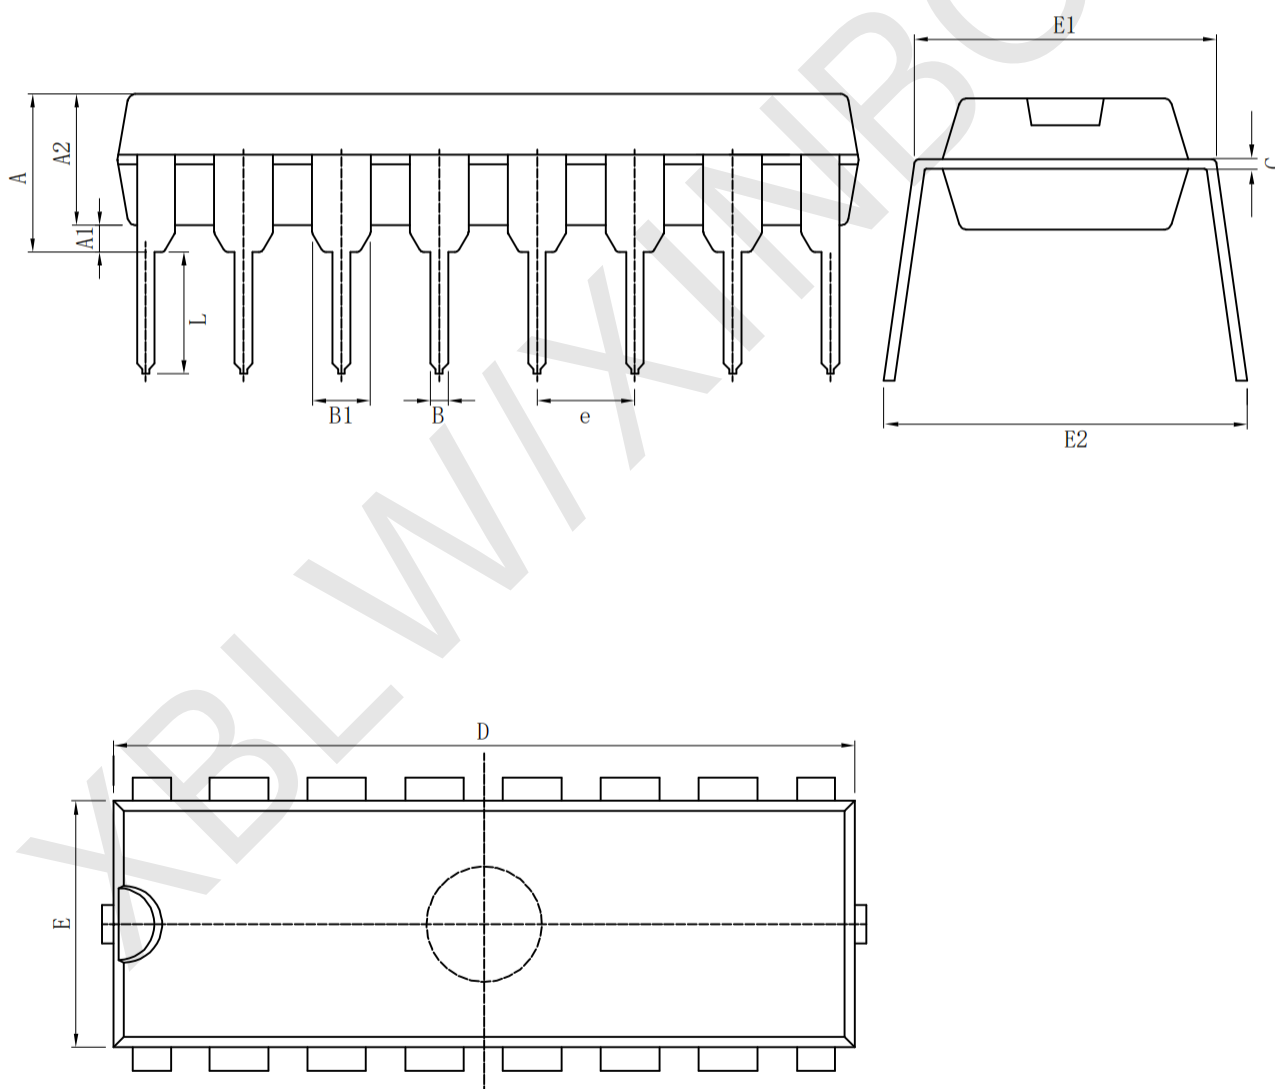


• SOP-16

| Size<br>Symbol | Dimensions In Millimeters |          |          | Size<br>Symbol | Dimensions In Inches |          |          |
|----------------|---------------------------|----------|----------|----------------|----------------------|----------|----------|
|                | Min (mm)                  | Nom (mm) | Max (mm) |                | Min (in)             | Nom (in) | Max (in) |
| A              | 1.500                     | 1.600    | 1.700    | A              | 0.059                | 0.063    | 0.067    |
| A1             | 0.100                     | 0.150    | 0.250    | A1             | 0.004                | 0.006    | 0.010    |
| A2             | 1.400                     | 1.450    | 1.500    | A2             | 0.055                | 0.057    | 0.059    |
| A3             | 0.600                     | 0.650    | 0.700    | A3             | 0.024                | 0.026    | 0.028    |
| b              | 0.300                     | 0.400    | 0.500    | b              | 0.012                | 0.016    | 0.020    |
| c              | 0.150                     | 0.200    | 0.250    | c              | 0.006                | 0.008    | 0.010    |
| D              | 9.800                     | 9.900    | 10.00    | D              | 0.386                | 0.390    | 0.394    |
| E              | 5.800                     | 6.000    | 6.200    | E              | 0.228                | 0.236    | 0.244    |
| E1             | 3.850                     | 3.900    | 3.950    | E1             | 0.152                | 0.154    | 0.156    |
| e              | 1.27 (BSC)                |          |          | e              | 0.050 (BSC)          |          |          |
| L              | 0.500                     | 0.600    | 0.700    | L              | 0.020                | 0.024    | 0.028    |
| L1             | 1.05 (BSC)                |          |          | L1             | 0.041 (BSC)          |          |          |
| θ              | 0°                        | 4°       | 8°       | θ              | 0°                   | 4°       | 8°       |

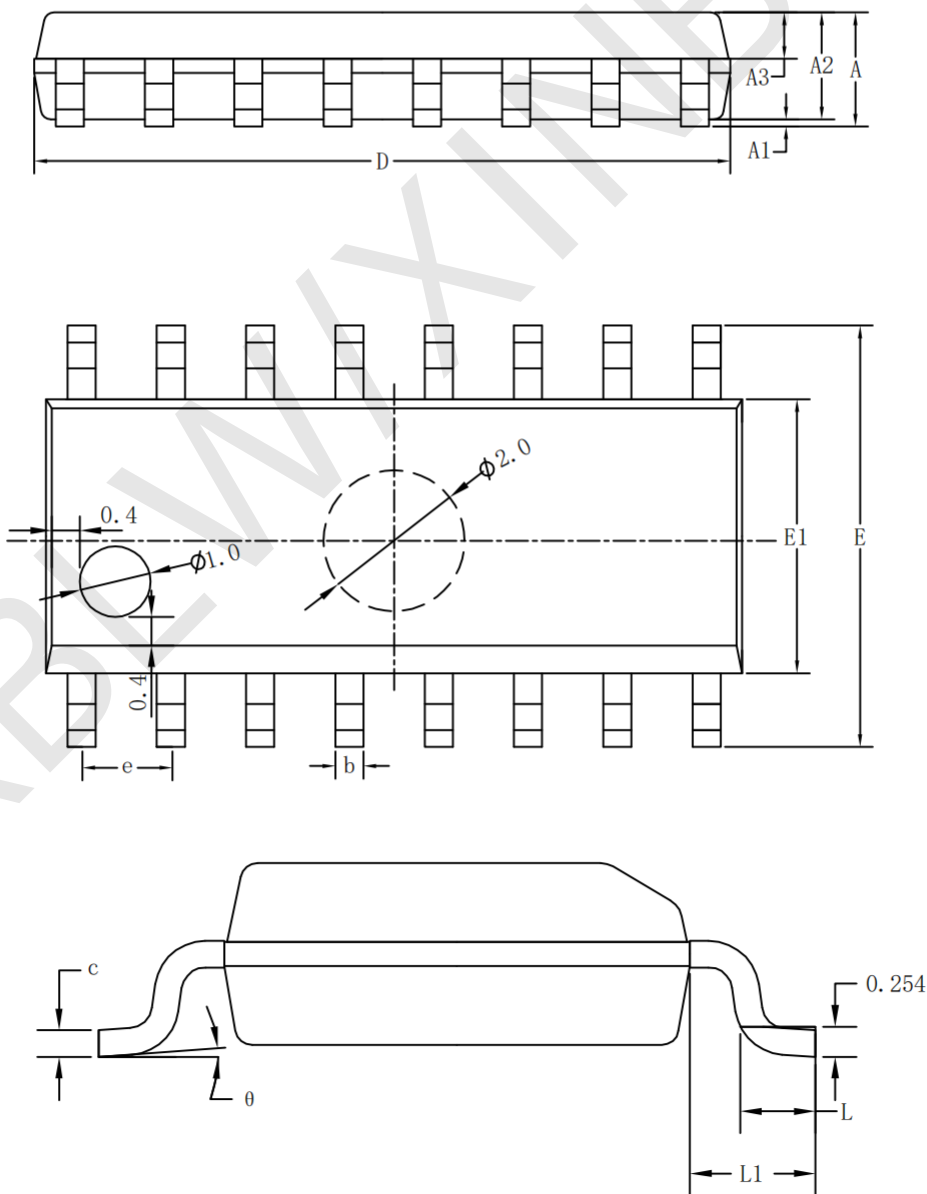

· TSSOP-16

| Size<br>Symbol | Dimensions In Millimeters |         | Size<br>Symbol | Dimensions In Inches |         |
|----------------|---------------------------|---------|----------------|----------------------|---------|
|                | Min(mm)                   | Max(mm) |                | Min(in)              | Max(in) |
| A              |                           | 1.200   | A              |                      | 0.047   |
| A1             | 0.050                     | 0.150   | A1             | 0.002                | 0.006   |
| A2             | 0.800                     | 1.050   | A2             | 0.031                | 0.041   |
| b              | 0.190                     | 0.300   | b              | 0.007                | 0.012   |
| c              | 0.090                     | 0.200   | c              | 0.004                | 0.0089  |
| D              | 4.900                     | 5.100   | D              | 0.193                | 0.201   |
| E              | 6.200                     | 6.600   | E              | 0.244                | 0.260   |
| E1             | 4.300                     | 4.480   | E1             | 0.169                | 0.176   |
| e              | 0.65 (BSC)                |         | e              | 0.0256 (BSC)         |         |
| K              | 0°                        | 8°      | K              | 0°                   | 8°      |
| L              | 0.450                     | 0.750   | L              | 0.018                | 0.030   |

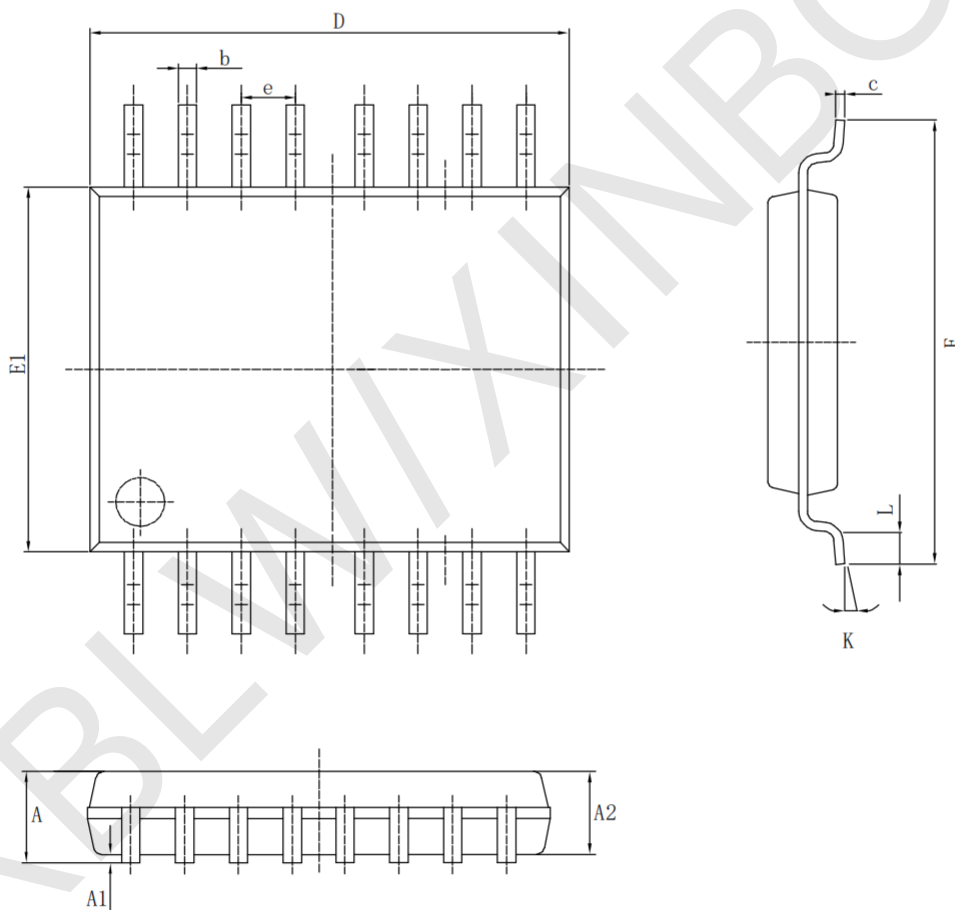

## Statement

- XBLW reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using XBLW products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- XBLW product has not been licensed for life support, military and aerospace applications, and therefore XBLW is not responsible for any consequences arising from its use in these areas.
- If any or all XBLW products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all XBLW products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- XBLW documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. XBLW assumes no responsibility or liability for altered documents.
- XBLW is committed to becoming the preferred semiconductor brand for customers, and XBLW will strive to provide customers with better performance and better quality products.