

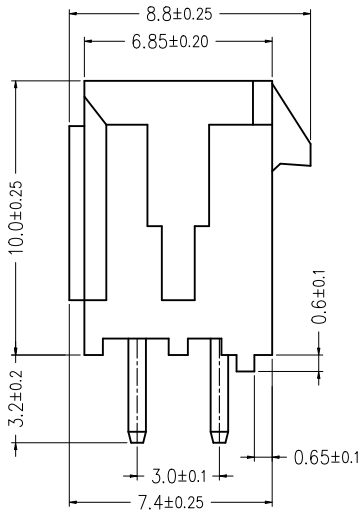
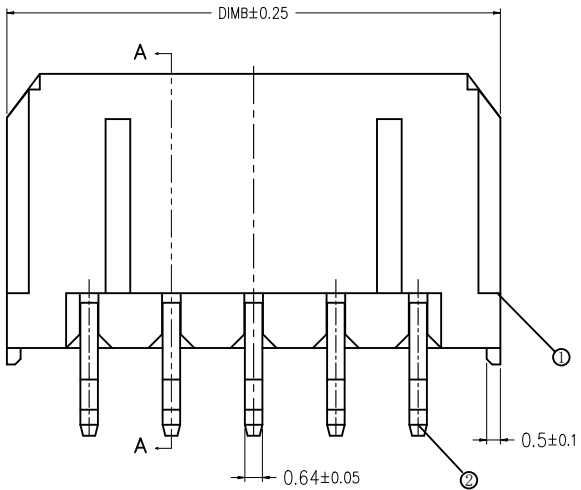


版次	变更摘要	日期
0	新产品发行	2019/07/20
1	料号变更	2024/09/26



序号	品名	材质
①	MX3.0双排直针WTB胶芯	LCP UL94V-0 黑色
②	MX3.0双排直针WTB端子	铜合金/表面镀锡

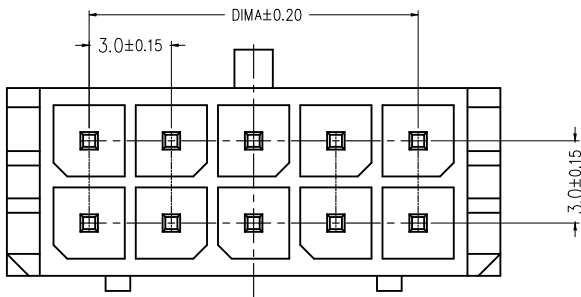

TYPE 1(无K脚)

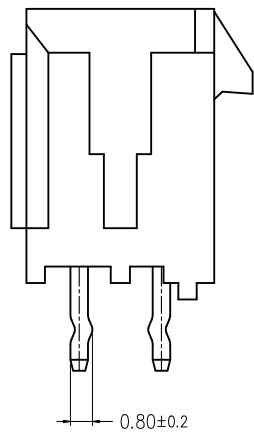

TYPE 2(打K脚)

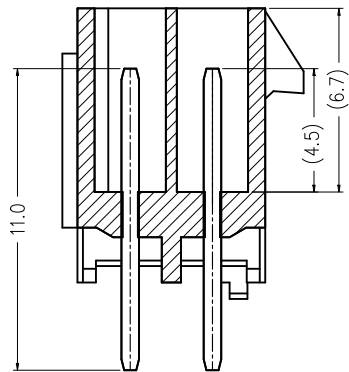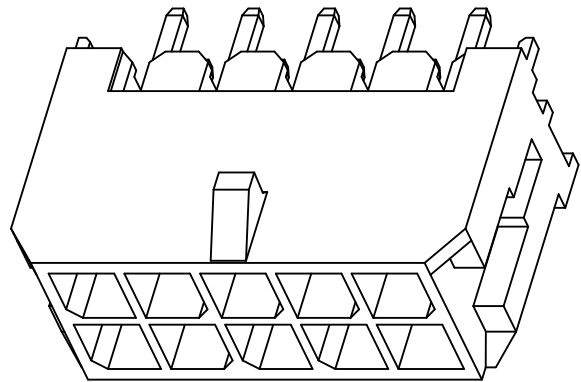


SECTION A-A

CKT	A	B
2*1		6.00
2*2	3.0	9.00
2*3	6.0	12.00
2*4	9.0	15.00
2*5	12.0	18.00
2*6	15.0	21.00
2*7	18.0	24.00
2*8	21.0	27.00
2*9	24.0	30.00
2*10	27.0	33.00
2*11	30.0	36.00
2*12	33.0	39.00

技术指标(Technical Index):

- 温度范围(Temperature range): -25° C~+85° C.
- 额定电压(Rated voltage): 600V, AC, DC.
- 额定电流(Rated current): 5.0A AC, DC.
- 接触电阻(Contact resistance): ≤20mΩ .
- 耐压值(Withstanding voltage): 1500V AC/minute.
- 绝缘电阻(Insulation resistance): ≥1000MΩ.
- 产品料号(Product material No.):

WB300A1E-*** ** * 流水码
NO OF CKT(产品PIN数)
Plating(电镀方式)
3:端子全亮锡
(Terminal all bright tin)
Packing(包装方式)
P:PE袋装
B:盒装

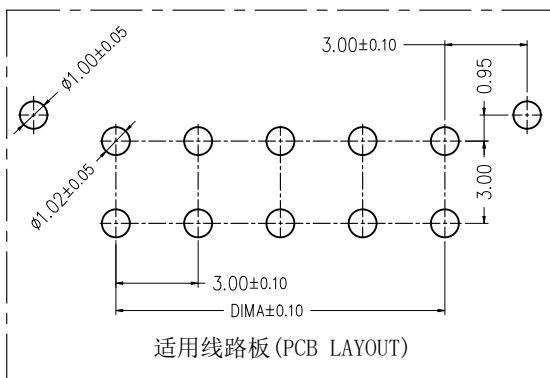

适用线路板(PCB LAYOUT)



一般公差(TOLERANCE)
X. ±.50 .XX ±.10
X. ±.20 .XXX ±.05
ANGLES ±1°

ZGWD 浙江温达电子有限公司
ZHEJIANG WENDA ELECTRONICS CO., LTD

品名(TITLE)	MX3.0双排直针WTB	制图(DR)	ANLAN
料号(DWG.NO)	WB300A1E-***-***	校对(CHKD)	田锋
比例(SCALE)		审核(APPD)	黄志明
单位(UNITS)	mm	张数(SHEET)	1 OF 1
尺寸(SIZE)	A4	版本(REV)	A