


HSF RoHS FILE NO:E362610

SPECIFICATIONS
Current Rating:3.0AMP
Contact Resistance:10mΩ Max
Dielectric Strength:Min 1000V RMS
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PPS
Soldering Temperature: 260°C±5° 5S

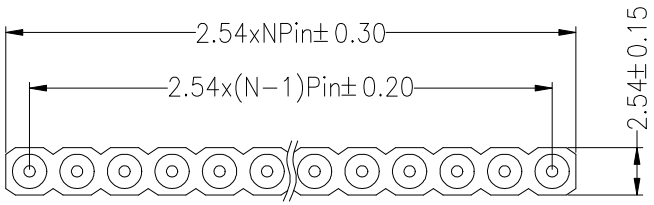

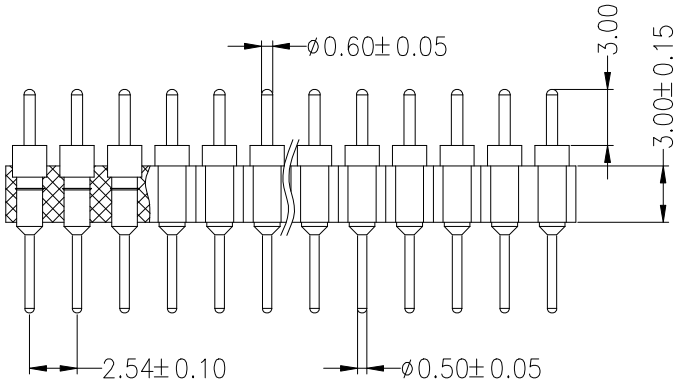




Ordering Information

3610 30 1 XX S XX 119 XX

- No.of Pins 2−40
- Contact Plating
  G1:Gold Flash
  G3:2U"Gold
  G4:3U"Gold
  G5:5U"Gold
  G6:10U"Gold
  G7:15U"Gold
- Length 119=11.96mm
- Stream code

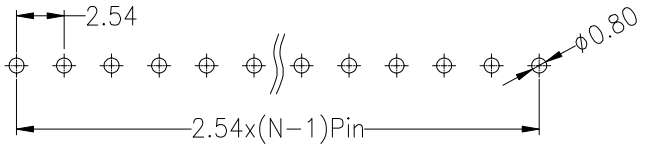

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE± 0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2021.04.01	NEW DRAWING	

OPERATION		DRAW	Wei Chen	21.04.01	SCALE	FIT
X.X	± 0.30				UNIT	mm
X.XX	± 0.20	CHECK			SIZE	A4
X.XXX	± 0.10				SHEET	1/1
Angle	± 3°	APPROVE			PROJ.	
DIM	TOL					

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel：86-755-2997-5806/5802 Fax：86-755-2997-5992

PART NO.	3610301XXSXX119XX
TITLE:	2.54x3.0 单排双头针 L=11.96上针0.6下针0.5