





RoHs

NOTES:


- 1.BASE: LCP
- 2.PIN: Brass
- 3.Solder Tab: Brass

SPECIFICATIONS:

- 1.Spacing: 2.0
- 2.Voltage Rating: 250V AC DC
- 3.Current Rating: 2A AC DC
- 4.Insulation Resistance: 800M Ω Min
- 5.Contact Resistance: 20m Ω Max
- 6.Withstanding voltage: 500V AC 1/Minute
- 7.Temperatuer Range: -25 $^{\circ}$ C ~+ 85 $^{\circ}$ C

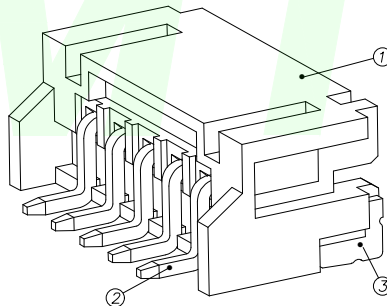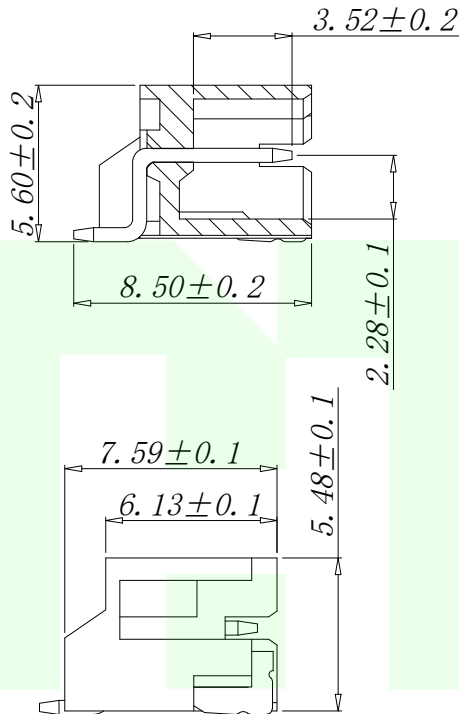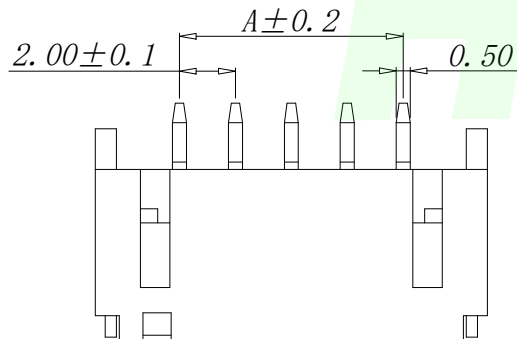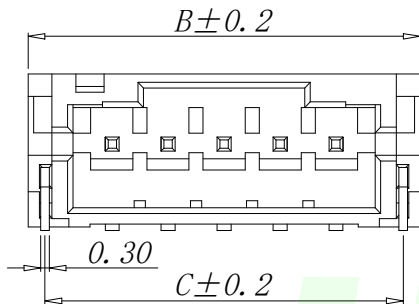

PIN number variable size comparison table				
PART NO	Pin	A	B	C
W2002120-2PW2431	2	2.00	8.00	6.80
W2002120-3PW2431	3	4.00	10.00	8.80
W2002120-4PW2431	4	6.00	12.00	10.80
W2002120-5PW2431	5	8.00	14.00	12.80
W2002120-6PW2431	6	10.00	16.00	14.80
W2002120-7PW2431	7	12.00	18.00	16.80
.....				
W2002120-16PW2431	16	30.00	36.00	34.80

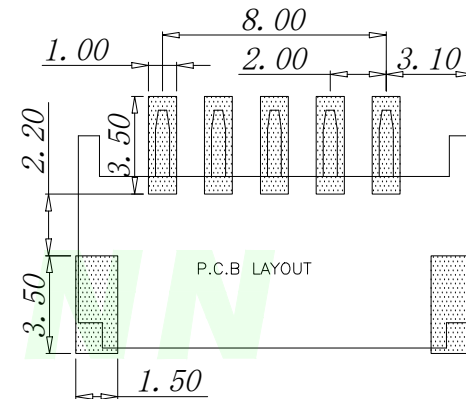

GENERAL TOLERANCES
UNLESS SPECIFIED

X.X	±0.30	X. $^{\circ}$	±5 $^{\circ}$
.XX	±0.20	X.X $^{\circ}$	±1 $^{\circ}$
.XXX	±0.10	X.XX $^{\circ}$	±0.5 $^{\circ}$
MANUFACTURE DWG			



深圳市华明通电子有限公司
Shenzhen Huamingtong Electronics Co., Ltd

PART NO.	TITLE:		
W2002120-XPW2431	WAFER 2.00 贴片		
DESIGN:	James	CUSTOMER	SIZE
CHED:	Talen		A4
APPD:	Sophia	SCALE	UNITS
			MM
		SHEET	1/1