
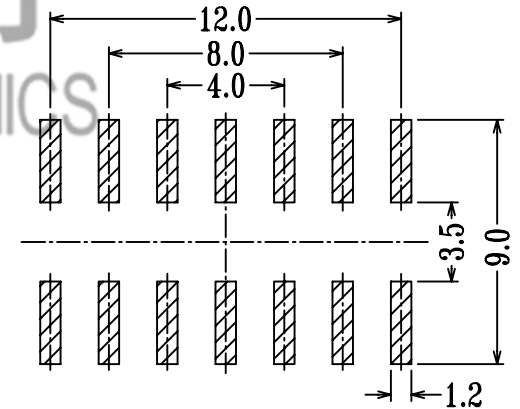
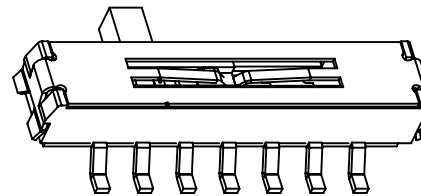


SCHMATIC

SPECIFICATION

1. Rating: DC 6V 0.3A
  2. Travel: 2 mm
  3. Function: 2P5T
  4. Contact Resistance:  $\leq 70m\Omega$  MAX
  5. Operating Force:  $250 \pm 80gf$
  6. Life test: 10,000 cycles
- KNOB G= 2.0, 3.0, 4.0 5.0mm 5.5mm

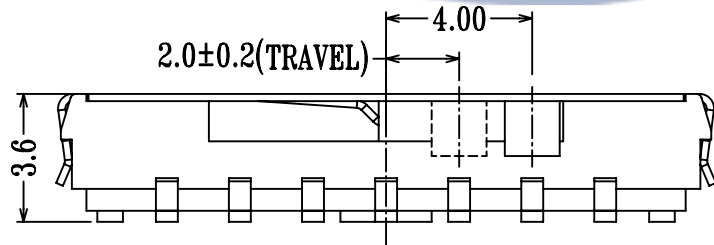

P.C.B LAYOUT

				TOLERANCE UNLESS SPECIFIED							
				UP TO 5mm: $\pm 0.1$	ANGULAR						
				ABOVE 5mm: $\pm 0.2$	$\pm 1^\circ$	NO	DATE	REVISIONS		BY	APPD
4	MK22D10A	Phosphor copper	2	NATURAL	TITLE: MINI SLIDE SWITCH			UNIT : MM	ROHS	DWN	
3	MK25D20 KNOB	PA46	1	BLACK	MODEL: MK-25D20G5. 5-B			SCALE: 6:1	COMPLIANT	CHK'D	
2	MK25D20 COVER	SUS301	1	WASHING	 DONGGUANG HAOYU ELECTRONICS CO., LTD 皓宇 东莞市弘皓电子有限公司			APPD			
1	MS25D20 CASE	LCP/ BRASS	1	BLACK/Au/Ag PLATED				PRO.AGL:  		REV :A0	
NO.	PART NAME	MATERIAL	QTY	FINISHING							