

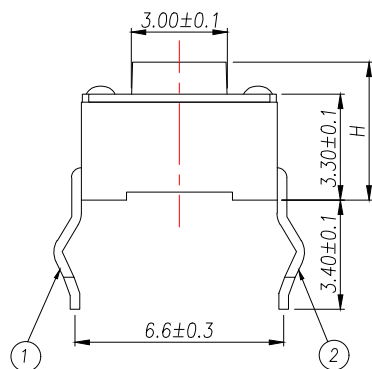
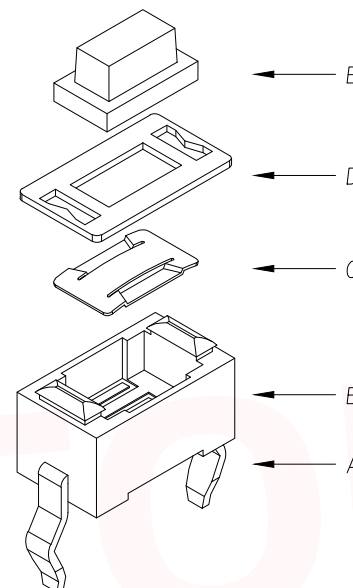


CIRCUIT DIAGRAM



The Main Thchnology Performance

Rate voltage,current	50mA DC12V
Contact resistance	≤100mΩ
Operating force	±30gf
Travel	0.20±0.10mm
Insulated resistance	≥100MΩ
Dielectric strength	≥250VAC/1min

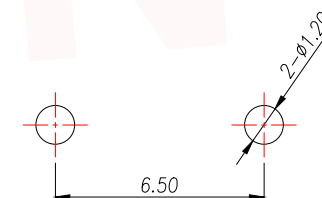

PCB.WELDING DRAWING

E	按钮	PPA	1	白/黑色
D	盖板	铜盖板	1	镀铜锡
C	弹片	不锈钢	1	镀银
B	本体	PPA	1	白/黑色
A	卡件	黄铜	1	镀银
ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR

T S O 2 - C B W 1

力度: F: 250G
E: 180G

高度: H4.3
H4.5
H5.0

DIMENSION IN mm		厦门市辛译精密电子有限公司 Xiamen XinYi Xyconn Electronics Co.,Ltd			
TOLERANCE UNLESS OTHERWISE SPECIFIED					
.X±0.35	X.*± 5°	APR. Alex	TITLE: 3x6 DIP TACT SWITCH		
.XX±0.25	.X*± 3°	CHK. Jack	DWG NO. TS02-CBW1FHX		
.XXX±0.15	.XX*± 1°	DRA. Can	PROJ. 		CUSTOMER DRAWING
			SIZE A4	SCALE 1:1	SHEET 1/1